



# Divar MR series Digital Video Recorder



- ▶ **Cost effective, secure embedded design**
- ▶ **Efficient MPEG-4 file compression**
- ▶ **View and record video in CIF, 2CIF, or 4CIF resolution**
- ▶ **Bosch and third-party PTZ dome control**
- ▶ **Export to USB or optional DVD writer**

The Divar MR digital versatile recorder gives you a compact and convenient CCTV management solution in an all-in-one embedded unit. It provides high-quality digital recording on up to 16 channels, with an internal storage capacity of up to 2 TB. The Divar MR boasts exceptional video quality and a high level of advanced functionality. Ease-of-use and versatility feature highly in its design, giving you trouble-free recording and management.

## Functions

The Divar MR offers high-quality, real-time digital recording on up to 16 channels. You can view and control cameras, handle alarms and check device status all through one convenient interface. In addition, the Divar MR offers:

- Improved clarity for better recognition on recorded video
- Longer recording time
- An extended range of features
- Multiple interfacing options
- Powerful search functions
- Synchronous audio
- Remote configuration and management
- Low maintenance requirements
- Lower total cost of ownership

## Image quality

The image quality of the Divar MR is excellent. Highly efficient MPEG-4 compression significantly reduces bandwidth and storage requirements compared to JPEG and wavelet technologies. You can store more detail and extend retention periods while reducing overall storage costs. The Divar provides real-time recording in CIF resolution on all channels simultaneously. For applications where even greater clarity is needed, you can use 4CIF to capture more detail in every scene.

## Multiple control methods

A variety of control methods contribute to an outstanding system with a high degree of operational flexibility. Bosch's IntuiKey keyboard places easy-to-use system control at your fingertips. Alternatively, use the Divar MR's front panel control buttons and jog dial, IR remote control, or a standard mouse for quick access to the system.

In addition to these control options, you can use the intuitive PC-based Divar MR Control Center software to easily manage multiple Divar MRs in your surveillance system. The Divar MR Control Center provides complete remote management including live viewing and control, playback, configuration, and remote alarm notification. With the Control Center, all operation and control can be centralized to create a highly scalable video management solution.

For added convenience, you can view live images using a web browser. This gives you the freedom to access your Divar MR images from virtually anywhere.

**Embedded design**

The embedded design of the Divar MR offers a higher level of security against network attacks than traditional systems and has a lower maintenance requirement. The security of your recordings remains high while the need to install software patches and anti-virus updates is eliminated. The integrated architecture of the Divar MR is simple to set up and operate, making life easy for both installers and users.

**Operational convenience**

The Divar incorporates a robust set of features designed to increase the convenience of operation:

- Easily compare past and present events by viewing live and playback images simultaneously in different cameos
- React immediately to events with the instant playback / recording functions – a dedicated button starts instant recording with a single push
- Automatically protect important event recordings against overwriting
- Quickly find events using the Smart Search feature to automatically detect changes within any area of the view you select
- Automatically trigger e-mail notifications when selected events occur

A dedicated Archive Player is included when video is exported, allowing video playback on a PC without installing additional software. The Archive Player also allows image authentication so that video tampering can be detected or ruled out in legal disputes.

**Comprehensive interfaces**

Flexible interface options make it easy to connect to a variety of external devices.

- Up to 16 video input and output channels
- VGA and dual monitor BNC outputs
- Audio inputs (4 or 8) and an audio output
- Ethernet 10/100BaseT network connection
- Up to 16 alarm inputs and 8 outputs
- Biphase connection allows one cable to control Bosch PTZ cameras at a range of up to 1.5 km / 0.9 miles
- Third-party PTZ control via RS-422/RS-485 connection
- USB connectors front and back – connect a mouse to control the user interface, or archive video to a USB memory stick or similar device

**Applications**

The Divar MR is available in 8 and 16 channel versions with a variety of hard drive capacities, and if required, an internal DVD writer. The Divar MR range delivers a comprehensive solution that is ideal for applications such as:

- Retail outlets
- Schools
- Apartment buildings
- Hotels

The highly flexible recording / storage capability lets you tailor video content and memory to your particular needs, helping you save space and reduce storage costs.

**Certifications and Approvals**


**Electromagnetic compatibility**

USA	FCC Part 15, Class B
EU	EMC directive 2004/108/EC
Immunity	EN50130-4
Emission	EN55022 Class B
Mains Harmonics	EN61000-3-2
Voltage fluctuations	EN61000-3-3

**Safety**

USA	UL60950-1
EU	EN60950-1
Can	CSA C22.2 No. 60950-1

**Installation/Configuration Notes**

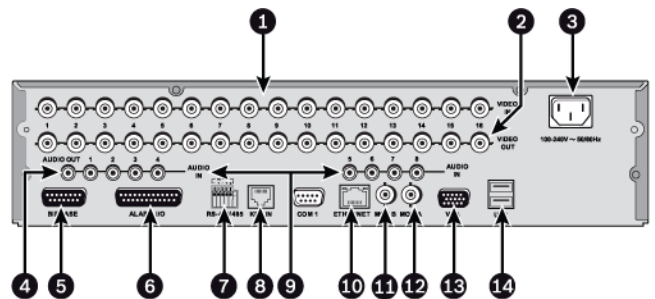

- 1 Camera video inputs
- 2 Camera loop through
- 3 Power input
- 4 Audio output
- 5 Biphase connection
- 6 Alarm inputs/outputs
- 7 RS-485 / RS422
- 8 Keyboard
- 9 Audio inputs
- 10 Ethernet
- 11 CVBS monitor B
- 12 CVBS monitor A
- 13 VGA monitor
- 14 USB ports

**Minimum PC requirements for Control Center**

Operating system	Windows 2000 Professional, XP or Vista DirectX 8.1
Web browser	Internet Explorer 6
Processor	Intel Pentium III or above, AMD Athlon with 800 MHz or above
RAM memory	512 MB or more
Free disk space	50 MB
Video system	AGP VGA with 64 MB Video RAM or above.
Connection	10/100-BaseT network interface

**Parts Included**

Quantity	Component
1	Divar MR Digital Video Recorder
2	Power cords
1	CD-ROM with Divar MR PC software and Operation manual
1	Mouse
2	Connection boards for alarm I/O and Biphas
1	IR remote control unit
2	AAA batteries for remote control unit
1	Rack mount kit

**Technical Specifications****Electrical****Rated Voltage and Power**

Power input	100 to 240 VAC; 50/60 Hz
Power consumption	Max. 80 W (with 1x HDD) Max. 120 W (with 4x HDD) Max. 1.2 A

**Video**

Video standard	PAL or NTSC selectable
Resolution	704x576 PAL, 704x480 NTSC
Compression	MPEG-4
Inputs	8 or 16 composite video 0.5–2 Vpp, 75 ohm automatic termination
Outputs	8 or 16 composite video 1 Vpp, 75 ohm

**Audio**

Inputs	4 or 8 line in, 30 kOhm
Output	1 line, 100 kOhm
Compression	ADPCM2
Sampling rate	8 KHz

**Monitors**

VGA	Analog RGB 800x600 Monitor A Multi-screen, (VGA or CVBS)
MON-A	CVBS 1 Vpp $\pm 0.1$ V, 75 Ohm, BNC Monitor A multi-screen (VGA or CVBS)
MON-B	CVBS 1 Vpp $\pm 0.1$ V, 75 Ohm, BNC Monitor B spot/alarm

**Display Modes**

Monitor A	Full, full sequence, quad, quad sequence, multi-screen (live and playback)
Monitor B	Full, full sequence, quad and event pop-up
Frame rate 8 channels NTSC	240 IPS (real time per channel)
Frame rate 16 channels NTSC	480 IPS (real time per channel)
Frame rate 8 channels PAL	200 IPS (real time per channel)
Frame rate 16 channels PAL	400 IPS (real time per channel)
Multiscreen mode 8 channels	1, 4, 9, 1+5
Multiscreen mode 16 channels	1, 4, 9, 16, 1+5, 1+7

**Alarm Handling**

Inputs	Screw terminal 8 or 16 inputs configurable NO/NC, Opto-coupled max. input 5 VDC
Outputs	Screw terminal 4 or 8 relay outputs, configurable NO/NC, max. rated 1 A, 30 VAC, 0.3 A, 125 VAC
Remote notification	Via e-mail or remote PC client

**Connections**

Ethernet	RJ45 modular jack 8 pins shielded: 10/100 Base-T
Biphase	Screw terminal connector (5 outputs) Maximum 5 controllable cameras per Biphas output Impedance 128 ohm, max. overvoltage protection $\pm 40$ V, max. cable length 1.5 km (9 miles)
PTZ control interface	RS485/RS422
Serial interface	RS232 output signals according to EIA/TIA 232 F, max. input voltage $\pm 25$ V DB9 male connector
Keyboard	Conforms to RS485, max. signal voltage $\pm 12$ V, power supply to keyboard 11–12.6 V at max. 400 mA RJ11 modular jack 6 pins
USB	Three USB 2.0 ports

**Network**

Transmission speed	up to 120 IPS @ 352X240
Bandwidth control	Automatic
Remote users	Maximum 5 simultaneously connected Control Center users
Protocol support	ICP/IP, DHCP, DNS, DDNS, HTTP and NTP

**Storage**

Internal HDD	160, 320, 500, 1000 or 2000 GB Up to 4 hard disks
Internal DVD writer (not on all models)	DVD+R / DVD+RW, DVD-R / DVD-RW, CD-R / CD-RW
External	Via USB (3x) or Network

**Security**

	Password protection
	Image authentication

**Record Frame Rate :**

8-channels NTSC	Up to 240 IPS @ 352x240
	Up to 120 IPS @ 704x240
	Up to 60 IPS @ 704x480
16-channels NTSC	Up to 480 IPS @ 352x240
	Up to 240 IPS @ 704x240
	Up to 120 IPS @ 704x480
8-channels PAL	Up to 200 IPS @ 352x288
	Up to 100 IPS @ 704x288
	Up to 50 IPS @ 704x576
16-channels PAL	Up to 400 IPS @ 352x288
	Up to 200 IPS @ 704x288
	Up to 100 IPS @ 704x576

**Recording**

Overwrite modes	Normal partition (continuous and instant recording)
	Event partition (input and motion recording)
	Normal and event partition
	Off
Pre-alarm recording	Up to 60 sec.

**Search**

Playback function	FF, FB, Frame advance (control keys and jog dial)
Search mode	Date/time, Event (motion, input), bookmark, smart

**Mechanical**

Dimensions (W x D x H)	430 x 435 x 89 mm (16.9 x 17.1 x 3.5 in)
Weight (4x hard disks)	Approx. 9 kg (19.8 lb)
Rack mount kit	For mounting one unit in an EIA 19-inch rack

**Environmental**

Operating Temperature	+0°C to +40°C (+32°F to +104°F)
Humidity	0%RH to 80%RH

**Ordering Information****DVR-8K-016A Divar MR 8CH, 160GB      DVR-8K-016A**

Divar MR Digital Video Recorder with 8 channels and 160GB

**DVR-16K-032A Divar MR 16CH, 320GB      DVR-16K-032A**

Divar MR Digital Video Recorder with 16 channels and 320GB

**DVR-8L-016A Divar MR INT.DVD 8CH, 160GB      DVR-8L-016A**

Divar MR Digital Video Recorder with internal DVD writer, 8 channels and 160GB

**DVR-8L-032A Divar MR INT.DVD 8CH, 320GB      DVR-8L-032A**

Divar MR Digital Video Recorder with internal DVD writer, 8 channels and 320GB

**DVR-8L-050A Divar MR INT.DVD 8CH, 500GB      DVR-8L-050A**

Divar MR Digital Video Recorder with internal DVD writer, 8 channels and 500GB

**DVR-8L-100A Divar MR INT.DVD 8CH, 1000GB      DVR-8L-100A**

Divar MR Digital Video Recorder with internal DVD writer, 8 channels and 1000GB

**DVR-16L-032A Divar MR INT.DVD 16CH, 320GB      DVR-16L-032A**

Divar MR Digital Video Recorder with internal DVD writer, 16 channels and 320GB

**DVR-16L-050A Divar MR INT.DVD 16CH, 500GB      DVR-16L-050A**

Divar MR Digital Video Recorder with internal DVD writer, 16 channels and 500GB

**DVR-16L-100A Divar MR INT.DVD 16CH, 1000GB      DVR-16L-100A**

Divar MR Digital Video Recorder with internal DVD writer, 16 channels and 1000GB

**DVR-16L-200A Divar MR INT.DVD 16CH, 2000GB      DVR-16L-200A**

Divar MR Digital Video Recorder with internal DVD writer, 16 channels and 2000GB

**Americas:**  
Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: +31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**  
Bosch Security Systems Pte Ltd  
38C Jalan Pemimpin  
Singapore 577180  
Phone: +65 6319 3450  
Fax: +65 6319 3499  
apr.securitysystems@bosch.com  
www.boschsecurity.com

**Represented by**