

# ACTentry A5

The ACTentry A5 is a door / gate entry system. The system comprises of an audio door / gate entry panel with integrated digital keypad and a hands-free intercom.

Speak to visitors before granting access or authorised visitors can use a pin code. The ACTentry A5 is suitable for private residences with automatic gates and small commercial enterprises.

The ACTentry A5 is an integrated solution making installation and programming quick and simple. The stylish entry panel and intercom are constructed of robust polycarbonate materials with an attractive and modern finish.

## Product Features

### Entry Panel

- High quality audio
- 10 user codes on digital keypad
- Programmable backlighting
- 2 relays to control second entrance, lighting, etc.
- Weather resistant (IP56 – potted electronics)
- Switch Unit available for second entry panel
- Latch open option

### Intercom

- Hands-free operation
- Volume control buttons
- Door / Gate release button
- Programmable second button for controlling second entrance, lighting, etc.
- Backlighting
- Connect up to 4 intercoms
- Latch open option

## Door Entry & Access Control

# ACT

Access Control Technology



Entry Panel



Intercom



# ACT Entry

# ACT Entry

ACT Entry products enable the identity of the visitor to be determined prior to granting access. Designed for both Commercial and Domestic properties an ACT Entry system greatly enhances the security of a building.

## Door Entry & Access Control

**ACT**  
Access Control Technology



Entry Panel



Intercom

### Installation Guidelines

- 200m range between entry panel and intercom with CAT5 or Belden cable
- Switch Unit available for second entry panel
- Connect up to 4 intercoms per entry panel
- Supports up to 4 ACTentry intercoms and 8 ACTentry entry panels

### Product Specification - Entry Panel


Number of Doors	2
Number of PIN codes	10
Operating Voltage	15 - 24 VoltAC / DC
Current Consumption	300 mA (maximum)
Operating Temperature	-10 to +60 degrees
Door Open Time	2 - 255 seconds
Relay Contact Rating	5 A / 250 VAC
Dimensions	211 x 94 x 30.5 (h x w x d, mm)
Weight	360 grams
IP Rating	IP56 (outdoor)
Construction	slimline, polycarbonate housing with backlighting

### Product Specification - Intercom

Number of Intercoms	Up to 4 per entry panel
Operating Voltage	15 - 24 Volt DC
Current Consumption	150 mA (maximum)
Operating Temperature	-10 to +60 degrees
Door Open Time	2 - 255 seconds
Relay Contact Rating	5 A / 250 VAC
Dimensions	158 x 94 x 30.5 (h x w x d, mm)
Weight	230 grams
IP Rating	IP54 (indoor only)
Construction	slimline, polycarbonate housing with backlighting

### Ordering Information

ACTENTRYA5E-PAN	entry panel (external)
ACTENTRYA5ICOM	intercom (internal)
ACTENTRYA5SWITCH	switch unit for multiple entry panels
ACTENTRYA5ICOM-K	intercom kit (entry panel, intercom & PSU)
ACTENTRYA5PSU	DC power supply unit

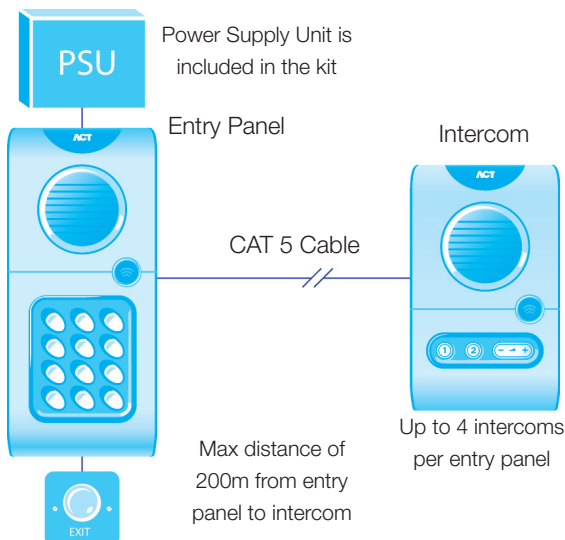

ACTentry A5 Schematic