# **Armlock® 281**

## Direct-Pull Magnet





### **Function**

To facilitate remote access and exit control of any aluminium, timber or steel door. The Armlock® 280 Series features clean aesthetics whilst maintaining a magnetic holding force of at least 510kg (1120lbs). Offering durability and low maintenance, Armlock® 280 Series Magnetic Locks at all times provide positive fail-safe operation (unless power supply continued during power failure by means of battery back-up). The 281 has a security pin feature to help prevent unauthorised removal of the magnet from the door frame fixing plate.

Note: For maximum security specify an MS® Deadlock in conjunction with the direct-pull magnet.

## **Specifications**

Single Magnet: 40mm x 266mm x 73mm.

Double Magnet: 40mm x 532mm x 73mm.

Armature: 16mm x 160mm x 61mm.

(2 no. for double magnet).

Nominal Holding Force: 510kg (1120lbs).
Supply Voltage: 12 or 24vDC (±15%).

Nominal Current: 480mA @ 12vDC, 240mA @ 24vDC. Dual coil.

Built-in voltage spike suppressor.

Monitoring: Relay dry contact with LED.

Door Gap: Maximum 3mm (1/8").

Positioning: Outward opening - surface mounted to door

frame header. Inward opening - door frame


header using 'L' & 'Z' brackets.

Magnet Housing: Brushed satin aluminium.


Note: To achieve immediate release, it is important

that the release switch breaks the circuit on

the positive supply to the magnet.

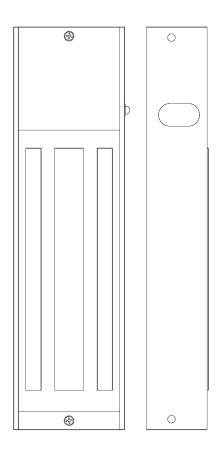


#### **Dimensions**

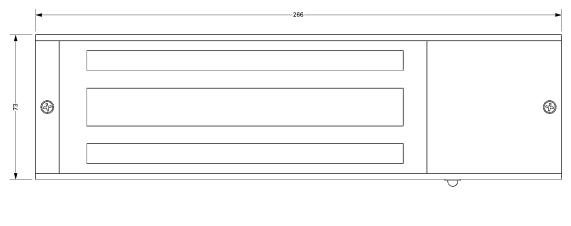



Armlock<sup>®</sup> 281-005

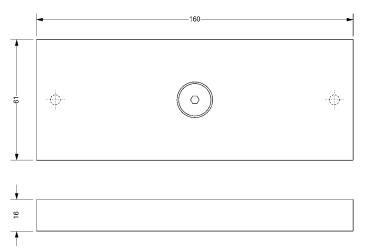

Armature for Armlock 280° Series Magnets

## **Ordering Codes**

Surface mounted single direct-pull magnet, 12/24vDC, non-monitored, suitable for timber or metal door applications.
 Surface mounted double direct-pull magnet, 12/24vDC, non-monitored, suitable for timber or metal door applications.
 Surface mounted single direct-pull magnet, 12/24vDC, monitored, suitable for timber or metal door applications.
 Surface mounted double direct-pull magnet, 12/24vDC, monitored, suitable for timber or metal door applications.
 Surface mounted double direct-pull magnet, 12/24vDC, monitored, suitable for timber or metal door applications.
 Armlock\* 260/280 Series glass armature bracket

Parts

281-300 Spare armature plate only for 280 Series.

### **Related Hardware**

'L' and 'Z' Brackets (p34, 36) ~ 4591M & 999M Monitored Paddle Handle & Exit Device Switching Accessories (p48) RiteKey Keypad (p54) ~ Push-to-Exit Button (p56) ~ Power Supply Unit (p58)