

### DESCRIPTION

The IXGW-LC is a lift control adaptor for the IXC Series IP multi-tenant system. This adaptor allows for integration to the elevator control system allowing the elevator to be called to specific floors based on which tenant opened the door.

The IXGW-LC is equipped with 20 Form C relays and up to 16 adaptors can be included in a building. Each relay can be configured and assigned to a specific entry, tenant station, or app. Individual relay contacts can be activated when a specific tenant activates door release on a specific entry panel allowing the elevator to open and go to a specific floor. Additionally the elevator recall button on the IXC-2C7 can be used to activate a contact to recall the elevator to that specific floor.


### FEATURES

- PoE compliant
- 20 Form C relays
- Relay rating (24V AC/DC 500mA)
- Max of 16 adaptors per building

# IXGW-LC

## Lift Control Adaptor

### FEATURE CALL-OUT

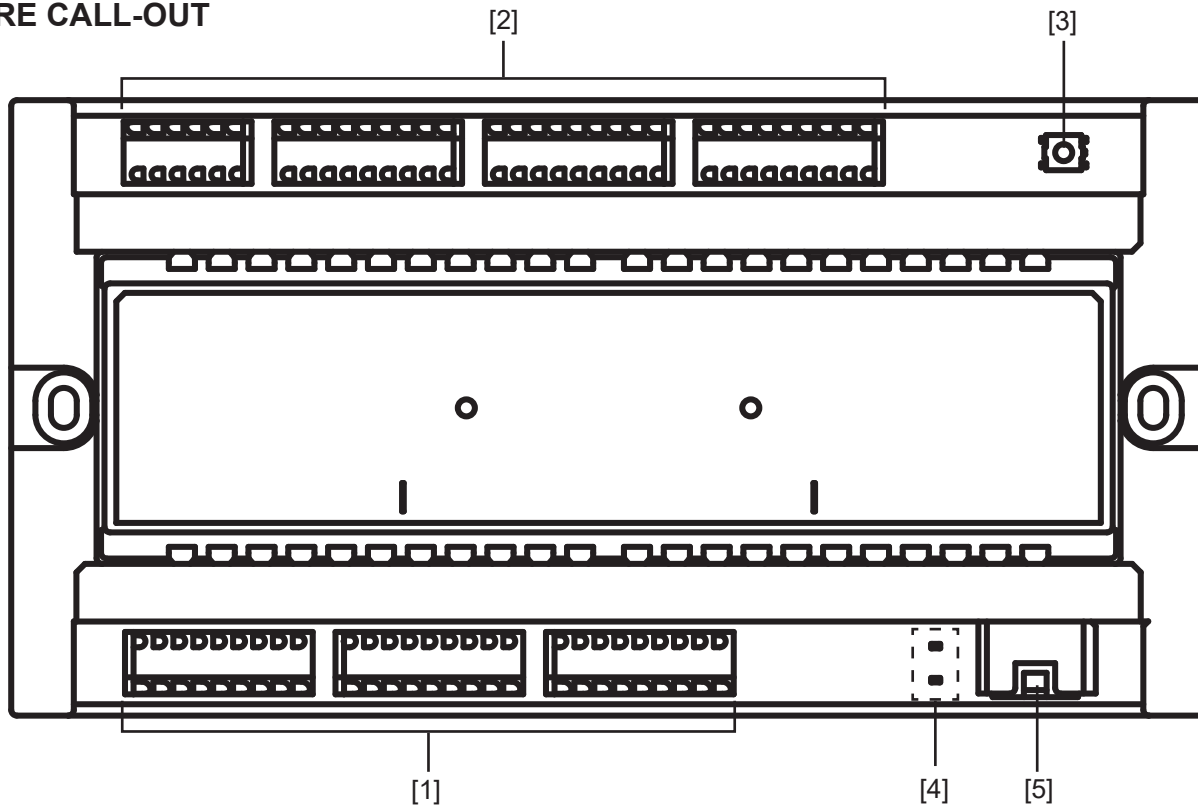

### FEATURE CALL-OUT DEFINITIONS

- [1] Relays 1-9
- [2] Relays 10-20
- [3] Reset button
- [4] Status Indicators (orange/green)
- [5] LAN Port (PoE)

### SPECIFICATIONS

Power Source:	PoE
Consumption:	Standby 2.1W, Max 4.4W
LAN:	Ethernet (10BASE-T, 100BASE-TX)
Packet delivery:	Unicast, Multicast
Protocol:	IPv4/v6, TCP, UDP, HTTP, HTTPS, IGMP, MLD, SFTP, DHCP, NTP, DNS, TLS
Encryption:	TLS 1.0, 1.1, 1.2
Operating Temp:	14° ~ 122°F (-10° ~ 50°C)
Dimensions:	4-1/4" H x 8-1/4" W x 2-3/8" D
UL Listed:	UL 62368-1 cUL 62368-1