



Reson8 Bell Box



The Reson8 bell box brings together aesthetics and functionality in a product designed to exceed all the requirements of EN50131-4 – Security Grade 2, Environmental Class III. With fully integrated sounder/strobe, self-activating cut-off timer and twin status indication, your choice of audible/visible warning devices has just been made easier.

Dual Anti-Tamper Operation

Tamper circuitry will operate if either the cover is opened, or the bell box is removed from the wall.

Integral Battery Backup

With the integral 12V Ni-Cd battery, SAB facility is available as standard.

115dB Sounder Output

Once triggered, a piercing 115dB siren sounds, this together with the high-visibility xenon flashes, provides both an audible and visual indication of a break-in.

Twin LED Status Indication


Two internal LEDs, one to identify that power is being supplied, and one to indicate tamper status. LED's can also be set to alternate for eye-catching status confirmation.

Sounder Timer Selection

Can be configured to reset itself after a preset time interval, to avoid noise pollution. An additional test mode allows short alarm bursts (lasting 5 seconds) when testing the alarm operation during commissioning.



Reson8 Bell Box Specification

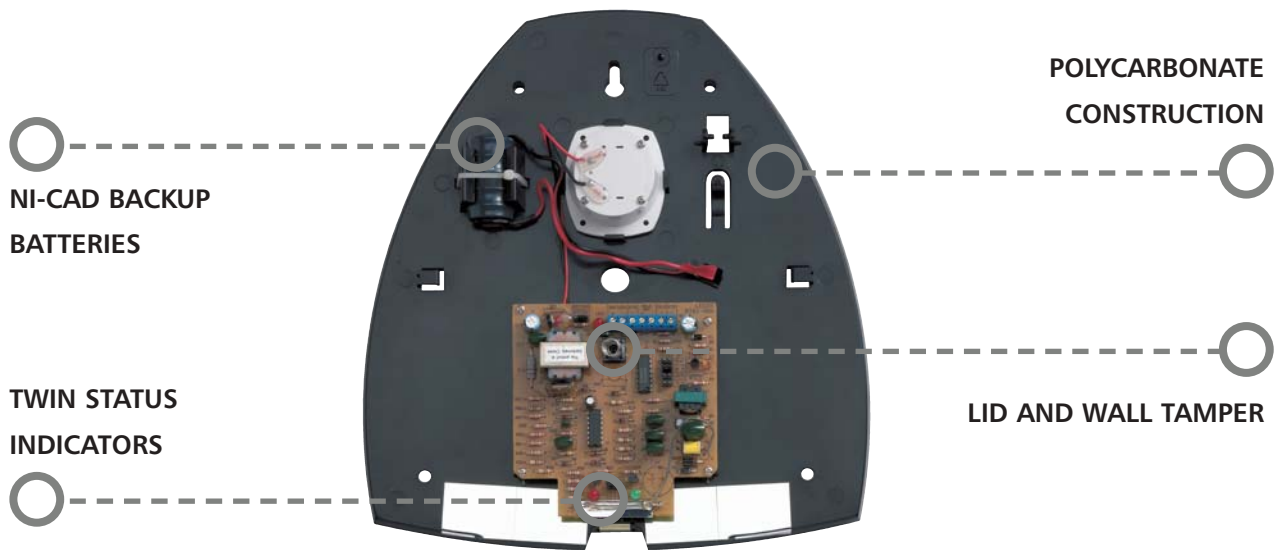

SPECIFICATIONS	RESON8 BELL BOX	RESON8 DUMMY
Operating Voltage	10-15 V dc	
Quiescent Current	50mA (Including battery charging)	
Flash Current at 12V	120mA	
Sounder Current at 12V	240mA	
Operation Mode	SAB (Self Active Bell)	
Dual Fail-Safe Cut-Off Timer	5, 10, 20 minutes 5 seconds for test mode	
Status Indication	Power healthy, Tamper operation Steady or alternating mode	
Flash Rate	80-140 flashes per minute	
Sounder Output (at 1m)	115dB	
Lens	Blue polycarbonate	
Body	White polycarbonate	
Bell Box Dimensions H x W x D	291 x 268 x 69 mm	
Carton Dimensions H x W x D	300 x 302 x 75 mm	
Weight	0.9Kg	0.69Kg
Packed Weight	1.108Kg	0.978Kg
Part Number	8EP420	8EP425

ADE



Novar ED&S Ltd The Arnold Centre Paycocke Road Basildon Essex SS14 3EA United Kingdom		Website www.ade.co.uk
Customer Service Tel 01268 563000	Customer Service Fax 01268 563563	Literature Helpline 0870 240 3387
Email ade_orderenquiries@novar.com or ade_technical@novar.com		Technical Helpline 01268 563247
Registered office: Novar House 24 Queens Road Weybridge Surrey KT13 9UX Registered No. 189291		Literature Ref: ADE-RES/04-04-01



Novar Intelligent Building Systems offers a uniquely comprehensive range of solutions for specifiers and installers of fire, security, building management, datacoms and electrical installation products and is equipped to provide a single source solution for all your requirements