



# MGW

## Cost-effective Toll Quality Fixed Wireless Telephony

Optimized for rural and suburban environments, the MGW delivers carrier-class voice, high-speed VBD (V.92) and ISDN-BRI services. The MGW's modular and scalable configuration, enables incremental growth based on customer demand and a fast return on investment. Operating in a wide range of frequencies (800MHz - 3.8GHz), hundreds of thousands of MGW lines have already been successfully installed in over 60 countries.





## Product Highlights

- Scalable and flexible system design allows for fast deployment, cost-efficiency and rapid ROI.
- Supports toll quality voice, ISDN-BRI and high-speed Voice Band Data.
- Optimizes spectrum utilization using field proven FH-CDMA technology and advanced multiplexing techniques.
- Supports a wide range of frequency bands (800MHz - 3.8GHz).
- Designed for rural, suburban and urban environments.
- Long distance radio coverage (Over 25km LOS).
- Supports full transparency to value-added services.
- Interfaces with standard analog & digital network protocols (V5.2, TR-008).
- Provides integrated network planning and management tools.


## System Description

The MultiGain Wireless (MGW) is a field proven point-to-multipoint Fixed Wireless Access (FWA) solution. The MGW enables the fast and cost effective implementation of high quality communication services for both incumbent and Competitive Local Exchange Carriers (ILEC/CLEC) worldwide.

In urban, suburban and rural environments, the MGW dependably supports a variety of services including toll quality voice, high-speed Voice Band Data (VBD) and ISDN-BRI.

The modular and flexible architecture of the MGW guarantees extremely fast deployment, regardless of the topography. The systems scalability enables low initial investment, with further capital outlay matching network growth and subscriber demand. Combining advanced Frequency Hopping CDMA technology with an innovative blend of space and time diversity techniques, the MGW delivers the highest level of spectrum utilization and exceptional communication immunity against environmental interference. Furthermore, the MGW Coverage eXtender (MCX) offers excellent utilization of E1 transmission media.

The MGW meets regulatory and operational requirements with a wide range of frequency bands (800MHz to 3.8GHz) and supports standard analog and digital interfaces (V5.2 or TR-008). The MGW system is supported by both FWA network planning tools and comprehensive management and control tools, providing a complete package to answer any operator's needs.

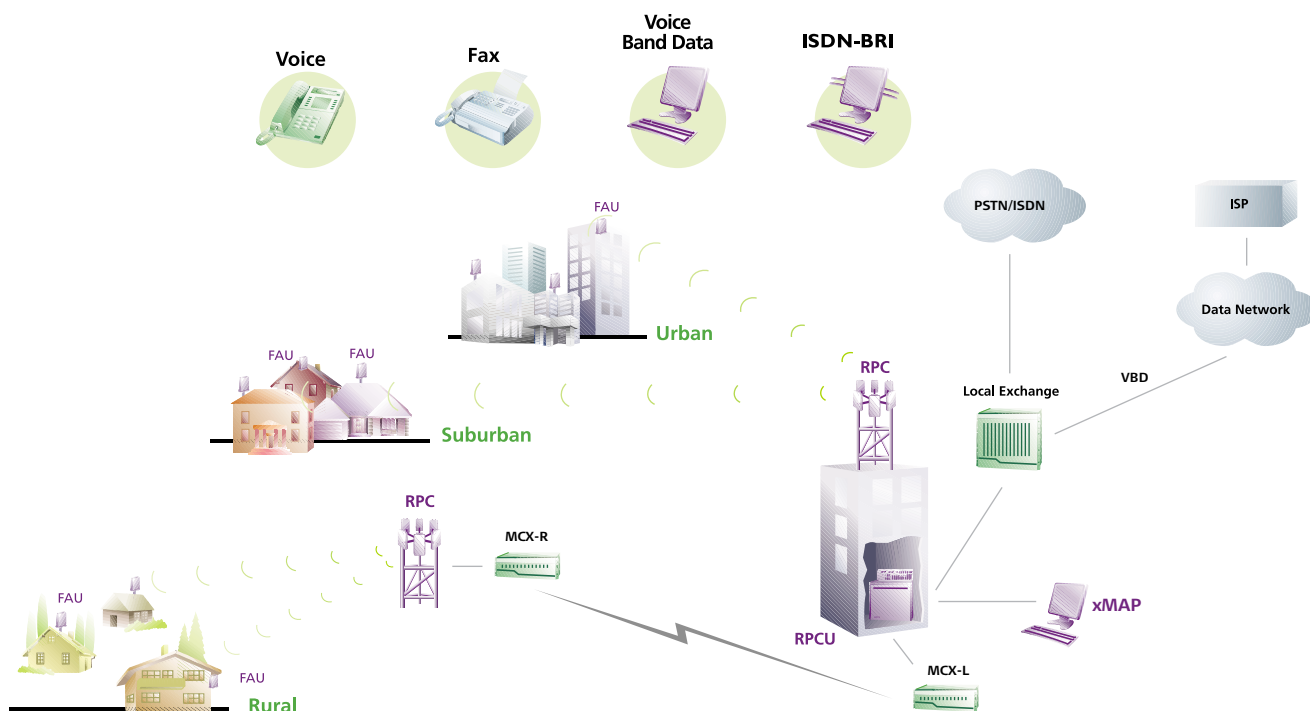



### RPCU - Radio Port Control Unit

The RPCU serves as the MGW Base Station Controller and is designed to provide the interface between the MGW system and the Local Exchange. It also acts as the interface and control of the Radio Units (RPCs) connected to it. Up to 18 RPCs can be connected to the same RPCU. The RPCU is connected to the LE via E1 (ITU-T G.703) links carrying different protocols (V.5.2 Standard Interface ETSI ETS 300 347; TR-008 via an external Digital Interface Unit; 2 wire loop start via an external Analogue Interface Unit). A fully equipped RPCU handles up to 1024 PSTN lines. If a specific site is required to support more than 1024 PSTN lines, additional RPCUs can be daisy chained and used to provide management and control from a single point.



RPCU

### RPC - Radio Port Coupler

Simple to install, small and waterproof, the RPC provides the radio port of the Base Station. The unit consists of the radio and the control circuits integrated in the same outdoor box with the antenna. Regular standard telephone lines connect the RPCs to the Base Station Controller (RPCU). Up to 80 RPCs can be installed in the same site, providing coverage to 60° or 120° sectors. Superior traffic efficiency can be achieved by co-locating several RPCs in the same sector and by sharing their air link resources.



RPC

### xMAP - The MGW Network Management System

Consists of a scalable architecture supporting multi-user and multi network elements managed locally or remotely over IP Networks. Complying with TMN requirements, the xMAP provides Fault, Configuration, Traffic and Performance Management as well as Security Management. The xMAP graphically displays the MGW components and their corresponding operational status, according to the standard predefined color classifications and severity.



### FAU - Fixed Access Unit

Easily mounted, small and lightweight Subscriber Unit, completes the radio link with the RPCs. The FAU is designed for outdoor installation and consists of the radio and telephone interface circuits, integrated into the same box with a built-in antenna. The FAU supports 1, 2 or 4 PSTN lines, Fax, Modem, Payphone and ISDN-BRI services.



FAU

### PCU - Power Supply and Charger Unit

Small, modern case and indoor wall mounted unit, provides the power to the FAU and contains an internal back-up battery used in the event of a mains power failure. The unit connects the building's internal wiring for PSTN lines.



PCU

### MCX - MGW Coverage eXtender

Used to extend the geographical coverage of the MGW networks. Up to 6 remote RPCs can be operated through one E1 link (ITU-T G.703) provided by regular transmission media (Microwave links, Fiber Optic, Coax, etc) and connected to a pair of MCXs (Local - located close to the RPCU and Remote - located far away from the RPCU). A fully equipped pair of MCXs handles several hundreds of PSTN lines.



MCX

### Network Planning Tool

Provides propagation modeling, traffic analysis, interference analysis, frequency planning and system sizing. Together with Alvarion's extensive deployment experience, the planning tool generates optimized network plans that minimize infrastructure costs.



## Specifications

### Voice services

POTS	
Voice toll quality	ADPCM 32 Kbps (ITU-T Rec G 726) PCM 64 Kbps (ITU-T Rec. G. 711 A-Law)
Extended voice services	CLASS Services (including CLI)
Signalling characteristics	DTMF dialing: transparent Pulse dialing
Tax signal	16 KHz 12 KHz (optional) Polarity reversal (optional)
Ring signal	25 Hz 20 Hz (optional)

### Data Services

Fax	Group 3
Modem	V. 92 (56 Kbps) over PCM
ISDN-BRI	2B + D

### Network Interface

Interface protocol	Analogue: 2 wire loop start Digital: V 5.2 (ETSI - ETS 300 347) Digital: T1-TR-008
Physical interface	RPCU: 2.048 Mbps trunks according to ITU-T G.703 AIU 120: 2 wire analogue (POTS) lines

### Radio Interface

Operating bands	800 MHz 1.5 GHz 1.9 GHz 2.4 GHz (full Tx power) 2.4 GHz (ISM band according to ETSI ETS 300 328) 3.4 to 3.8 GHz (according to ETSI EN 301 253) (other bands are available upon commercial agreement)
Channel spacing	1 MHz
Radio technology	Spread Spectrum Frequency Hopping CDMA (SS FH-CDMA) Duplex method - TDD Access method - downlink TDM; uplink TDMA Space and time diversity mechanisms implemented Radio range - over 25 km (LOS)

### System Components

Radio base station equipment	RPCU - Radio Port Control Unit RPC - Radio Port Coupler AIU 120 - Analogue Interface Unit DIU-T1 - Digital Interface Unit GSS - Global Synchronization System
Coverage extending equipment	MCX - Local Unit MCX - Remote Unit
Subscriber equipment	FAU 1, 2, 4 POTS lines Fixed Acces Unit FAU xP - 1, 2, 4 Payphone lines FAU xD - 1,2 POTS & Efficient Voice Band Data Fixed Acces Unit FAU 1i - ISDN-BRI Fixed Access Unit PCU - Power Supply and Charger Unit

### Environmental Conditions

Outdoor units (FAU, RPC)	Temperature: -40°C to +60°C Relative humidity: 10% to 95% Rain: rain proof (according to IEC 68-2-18)
Indoor units (RPCU, AIU 120, PCU, MCX-L, GSS)	Temperature: -5°C to +45°C Relative humidity: 5% to 85%
MCX-R	Temperature: -30°C to +55°C Relative humidity: 5% to 95%

### Power Requirements

FAU	Powered from the PCU connected to the AC mains supply with 8-hour rechargeable backup battery 110/220 VAC, 50/60Hz, 12VA maximum.
RPC	+ 60 Vdc, + 80 Vdc or + 90 Vdc remotely fed from the RPCU Typically, + 90 Vdc on 0.5 mm pairs diameter for 6 km RPCU RPC cable distance
RPCU	-48 Vdc nominal 650W, for maximum configuration
AIU-120	-48 Vdc nominal 40W, for maximum configuration
DIU-T1	48 Vdc nominal 55W, for maximum configuration
MCX-L	-48 Vdc nominal 50W, for maximum configuration
MCX-R	-48 Vdc nominal 240W, for maximum configuration
GSS	-48 Vdc nominal 25W, for each unit GPS and GTU

#### International Corporate Headquarters

Tel: +972 3 645 6262  
Fax: +972 3 645 6222  
Email: corporate-sales@alvarion.com

#### North America Headquarters

Tel: +1 760 517 3100  
Fax: +1 760 517 3200  
Email: n.america-sales@alvarion.com

#### Latin America & Caribbean

Tel: +1 954 746 7420  
Fax: +1 954 746 9332  
Email: lasales@alvarion.com

#### Brazil

Tel: +55 11 3815 6225  
Fax: +55 11 3813 0467  
Email: brazil-sales@alvarion.com

#### China

Tel: +86 10 8857 6770  
Fax: +86 10 8857 6772  
Email: china-sales@alvarion.com

#### Czech Republic

Tel: +420 222 191 233  
Fax: +420 222 191 200  
Email: czech-sales@alvarion.com

#### France

Tel: +33 1 34 38 54 30  
Fax: +33 1 34 38 54 39  
Email: france-sales@alvarion.com

#### Germany

Tel: +49 89 90405 923  
Fax: +49 89 90405 922  
Email: germany-sales@alvarion.com

#### Japan

Tel: +81 3 3556 7327  
Fax: +81 3 3556 5370  
Email: alvarion-japan@alvarion.com

#### U.K. & Ireland

Tel: +44 845 450 1414  
Fax: +44 845 450 1455  
Email: uk-sales@alvarion.com

#### Romania

Tel: +40 21 335 7631  
Fax: +40 21 335 7634  
Email: romania-sales@alvarion.com

#### Russia

Tel: +7 (095) 783 82 31  
Fax: +7 (095) 287 98 99  
Email: info@alvarion.ru

#### Uruguay

Tel: +598 2 606 2651  
Fax: +598 2 606 2652  
Email: lasales@alvarion.com



www.alvarion.com