

EasyView

Mini HD IR Network Camera

EasyView series is an economical and flexible mini dome HD network camera. 3-axis Gimbal and Cable Management provide an easier installation. The EasyView series can deliver a high quality megapixel imaging in both indoor and outdoor (Day/Night) applications.




Key Features

- ▶ High Definition up to 4M
- ▶ True Day/Night Functionality with Removeable IR Cut Filter
IP66 Weather Proof Standard
- ▶ Smart H.264
- ▶ Intelligent Infrared Technology
- ▶ Privacy Mask
- ▶ Motion Detection
- ▶ Region of Interest


- ▶ Hidden IR and IR Shield
The High Polymer IR shield can effectively increase the transmittance of infrared light and provide a better concealment.




- ▶ Ease of Installation
Easily adjustable with all directions

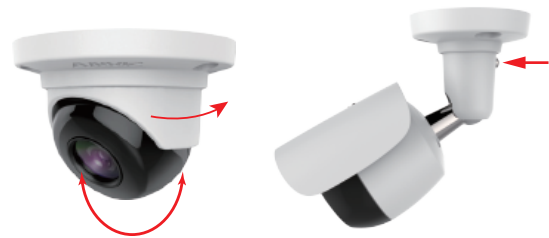

- ▶ IP66 Weather Proof Standard (For bullet shape model)
The high level of IP66 and outdoor design strengthen the reliability of EasyView series under harsh outdoor environment.

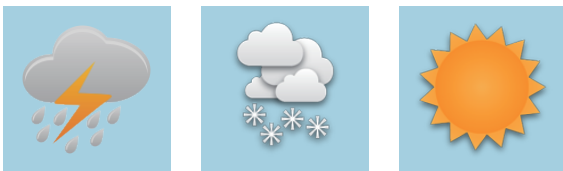

- ▶ F1.2 large aperture lens
Equip with F1.2 large aperture lens, EasyView series have extreme light sensitivity to give more details in low-light conditions.




Technical Specifications

Type	EA4502-IRA	EA4502-IREA
Resolution	2 Megapixel	2 Megapixel
Image Sensor	1/3" CMOS	1/3" CMOS
Shutter Time	1/3s-1/100000s	
Frame rate	50HZ: 25fps(1280×720) 60HZ: 30fps(1280×720)	50HZ: 25fps(1920×1080) 60HZ: 30fps(1920×1080)
Lens	4mm/F2.0 m12	4mm/F1.2 m12
Horizontal Angle of View	77°	77°
Minimum Illumination	0.05 Lux (Color) / 0.005 Lux(B/W)	0.01 Lux (Color) / 0.001 Lux(B/W)
SN Ratio	>52dB	

Data Transmission	Transfer Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS
	Interface Protocol	ONVIF
	Multistream	Support main stream and sub stream
Compression	Video Compression	H.264/MJPEG, Smart H.264
	H.264 Code Type	BaseLine Profile / Main Profile / High Profile
	Compression Output	32 Kbps~8Mbps
	Bitrate	
Image	Image Settings	Rotate Mode(mirror, flip), Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser
	Day/Night	IR-CUT
	BLC	Support
	WDR	Support
	DNR	3D DNR
	Privacy Mask	Support maximum 4 areas in one picture, various colors available
Smart Function	Smart Detection	Motion detection.

IR	IR Range	20m
	IR Control	Intelligently adjust the IR brightness and angle according to scene
Interface General	Ethernet	RJ-45 (10/100/1000Base-T)
	Operating Conditions	-30°C to 60°C (-22°F to 140°F)
	Power Supply	DC12V/PoE(802.3af)
	Power Consumption	MAX 12W
	Protection	IP53
	Weight	248g (0.55pounds)
	Dimensions	Φ92*65mm (Φ3.6"*2.6")
Safety Certifications	CE, FCC, RoHS	



Technical Specifications

Type	EA4502-IRB	EA4502-IREB
Resolution	2 Megapixel	2 Megapixel
Image Sensor	1/3" CMOS	1/3" CMOS
Shutter Time	1/3s-1/100000s	
Frame rate	50HZ: 25fps(1280×720) 60HZ: 30fps(1280×720)	50HZ: 25fps(1920×1080) 60HZ: 30fps(1920×1080)
Lens	4mm/F1.2 m12	4mm/F1.2 m12
Horizontal Angle of View	77°	77°
Minimum Illumination	0.05 Lux (Color) / 0.005 Lux(B/W)	0.01 Lux (Color) / 0.001 Lux(B/W)
SN Ratio	>52dB	

Data Transmission	Transfer Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS	IR	IR Range	20m
	Interface Protocol	ONVIF		IR Control	Intelligently adjust the IR brightness and angle according to scene
	Multistream	Support main stream and sub stream		Interface General	Ethernet
Compression	Video Compression	H.264/MJPEG, Smart H.264	Operating Conditions		-30°C to 60°C (-22°F to 140°F)
	H.264 Code Type	BaseLine Profile / Main Profile / High Profile	Power Supply		DC12V/PoE(802.3af)
	Compression Output Bitrate	32 Kbps~8Mbps	Power Consumption		MAX 12W
Image	Image Settings	Rotate Mode(mirror, flip), Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser	Protection		IP66
	Day/Night	IR-CUT	Weight		315g (0.69pounds)
	BLC	Support	Dimensions		Φ69*146mm (Φ2.7"*5.7")
	WDR	Support	Safety Certifications	CE, FCC, RoHS	
	DNR	3D DNR			
	Privacy Mask	Support maximum 4 areas in one picture, various colors available			
Smart Function	Smart Detection	Motion detection			

