Arecont Vision[®]

Leading the Way in Megapixel Video™


Standard Dome Accessories

Accessories for Indoor/Outdoor Ceiling, Wall, Pole and Corner Mounting Solutions



AV-PMA

Ceiling Mount Configuration



Wall Mount Configuration with Pole Mount Adapter

SO-CAP

AV-WMJB

Wall Mount Configuration


SO-CAP

MegaDome® 4K

Compatible Cameras:

AV-WMJB

Wall Mount Configuration with Corner Mount Adapter



Cap Options:



* Can be switched with SO3-CAP, SV-CAP or MD-CAP



MegaVideo® Compact D4SO

MegaDome® Series

AV-EBAR

Electrical Box Adapter Round



Features:

- Easy Installation and Superior Design
 Heavy Duty Enclosure Protection for
- Applications in Harsh Environments


 Die-Cast Aluminum is Resistant to

Impact and Salt Damage

Compatibility Compatible with 3/4" NPT standard

Works with MegaBall[®] Series, MegaDome[®] Series, MicroDome[®] Series -S cameras, SurroundVideo[®] Series, SurroundVideo[®] Omni Series, MegaVideo[®] D4SO Housing, MCD-CMT and MB2-JBA

Mechanical	Casing	Die-Cast Aluminum		
		IP66 Weather Proof Standard		
		IK-10 Impact-Resistant		
	Color	Ivory (Pantone Cool Gray 1C)		
	Dimensions	Ø6" (152.4mm) x 0.15" W (4mm)		
	Weight	w/o Camera	0.4lbs (0.18kg)	



Ø 6"	0.15
- (Ø 152.4mm	i) (4mm)
Hole No.	Model Compatibility
1	MegaBall Series Wall Mount (legacy), MCD-CMT
2	MegaBall Series Dome Mount
3	MegaBall Series Bell Mount, MicroDome Series Surface Mount*
4	MegaDome 2*, SurroundVideo Series Panoramics*, MegaVideo D4SO Housing, MB2-JBA
5	4S Box
6	4-11/16" Square Box
7	Single Gang Box
8	Double Gang Box
9	SurroundVideo Omni Series

* The mounting plate on MegaDome 4K, SurroundVideo G5 Mini, and MicroDome Duo negate the need for a separate electrical box adapter and therefore this accessory is not applicable.

Quick Installation:

- 1. Pass cables through the center hole of the adapter plate.
- 2. Attach the adapter plate to the electrical box (sold separately) using the appropriate hardware and mounting holes.
- 3. Attach the compatible part noted above.

AV-EBAS

Electrical Box Adapter Square

Weight



Features:

- Easy Installation and Superior DesignHeavy Duty Enclosure Protection for
- Applications in Harsh Environments
- Die-Cast Aluminum is Resistant to Impact and Salt Damage

 Compatibility
 Compatible with 3/4" NPT standard

 Works with MegaDome® Series, MegaView® Series, MicroBullet®, SurroundVideo® Panoramic Series, MegaVideo® D4SO Housing, AV-JBA, AV-WMJB, AV-SWWJB, MCD-WMT, MDD-WMT, HSG2-WMT, and AV-PMJB


 Mechanical
 Die-Cast Aluminum

 IP66 Weather Proof Standard
 IF66 Weather Proof Standard

 IK-10 Impact-Resistant
 IVory (Pantone Cool Gray 1C)

 Dimensions
 4.7" L (120mm) x 0.15" W (4mm) x 4.7" H (120mm)

w/o Camera 0.33lbs (0.13kg)



Hole No. Model Compatibility AV-JBA, AV-WMJB, AV-PMJB, MegaDome 2*, MegaView 2 (standard), SurroundVideo Panoramics*, 1 MegaVideo D4SO Housing HSG2-WMT, AV-WMJB bracket, 2 AV-PMJB bracket, MegaView 2 bracket 3 AV-SWMJB, MCD-WMT, MDD-WMT MicroBullet 4 5 Single Gang Box Double Gang Box 6 7 4S Box 8 4-11/16" Square Box * The mounting plate on MegaDome 4K and SurroundVideo G5 Mini negate

The mounting plate on MegaDome 4K and SurroundVideo G5 Mini negate the need for a separate electrical box adapter and therefore this accessory is not applicable.

Quick Installation:

- 1. Pass cables through the center hole of the adapter plate.
- 2. Attach the adapter plate to the electrical box (sold separately) using the appropriate hardware and mounting holes.
- 3. Attach the compatible part noted above.



c(UL)us

AV-PMJB


Pendant Mount Bracket with Junction Box





Features:

- Easy Installation and Superior Design
 Heavy Duty Enclosure Protection for Applications in Harsh Environments
- Die-Cast Aluminum is Resistant to Impact and Salt Damage

Compatibility	Compatible with 1.5" NPT Female			
	Works with SurroundVideo [®] Series, MegaDome [®] 4K, MegaDome [®] Series, and MegaVideo [®] Compact D4SO			
Mechanical	Casing	Die-Cast Aluminum		
		IP66 Weather Proof Standard		
		IK-10 Impact-Resistant		
	Color	Ivory (Pantone® Cool Gray 1C)		
	Dimensions	5.87" H (149.31mm) x 4.69" W (119.20mm)		
	Weight	w/o Camera	2.12lbs (0.96kg)	








AV-WMJB

Wall Mount Bracket with Junction Box



Features:



- Applications in Harsh Environments
- Die-Cast Aluminum is Resistant to Impact and Salt Damage


Compatibility


c(UL)us


Works with SurroundVideo® Series, MegaDome® 4K, MegaDome® Series, and MegaVideo® Compact D4SO

Compatible with 1.5" NPT Female

Mechanical	Casing	Die-Cast Aluminum		
		IP66 Weather Proof Standard		
		IK-10 Impact-Resistant		
	Color	Ivory (Pantone® Cool Gray 1C)		
	Dimensions	7.68" L (195.05mm) x 4.69" W (119.20mm)		
	Weight	w/o Camera	2.49lbs (1.13kg)	









c(UL)us

AV-PMA


Pole Mount Adapter




Features:

- Easy Installation and Superior Design
 Heavy Duty Enclosure Protection for Applications in Harsh Environments
- Die-Cast Aluminum is Resistant to Impact and Salt Damage

Mechanical	Casing	Die-Cast Aluminum		
		IP66 Weather Proof Standard		
		IK-10 Impact-Resistant		
	Color	Ivory (Pantone® Cool Gray 1C)		
	Dimensions	5.01" W (127.32mm) x 4.92" H (125mm)		
	Weight	w/o Camera	0.32lbs (0.15kg)	





AV-CRMA

c(UL)us

Corner Mount Adapter




Features:

- Easy Installation and Superior Design
- Heavy Duty Enclosure Protection for Applications in Harsh Environments
- Die-Cast Aluminum is Resistant to Impact and Salt Damage


Compatibility

Works with AV-WMJB, AV-SWMJB, MDD-WMT, MCD-WMT, and AV-JBA

Mechanical	Casing	Die-Cast Aluminum		
		IP66 Weather Proof Standard		
		IK-10 Impact-Resistant		
	Color	Ivory (Pantone [®] Cool Gray 1C)		
	Dimensions	13.04" W (331.25mm) x 4.92" H (125mm)		
	Weight	w/o Camera 0.59lbs (0.27kg)		










SO3-C	ΔP		SO-CA	\P	
Mounting Ca			Mounting C		
Wounting O		F	Mounting O	ap	F t
		Features:			Features:
17		Easy Installation and Superior Design			Easy Installation and Superior Design
		Heavy Duty Enclosure Protection for			Heavy Duty Enclosure Protection for
		Applications in Harsh EnvironmentsDie-Cast Aluminum is Resistant to			Applications in Harsh Environments Die-Cast Aluminum is Resistant to
		Impact and Salt Damage			Impact and Salt Damage
		impact and car barrage			implot and our barnego
Compatibility	Compatible with		Compatibility		h 1.5" NPT Male
	Works with Surro	undVideo® Omni G3		Works with SurroundVideo® Omni and SurroundVideo® Omni G2	
Mechanical	Casing	Die-Cast Aluminum	Mechanical	Casing	Die-Cast Aluminum
	, i i i i i i i i i i i i i i i i i i i	IP66 Weather Proof Standard		-	IP66 Weather Proof Standard
		IK-10 Impact-Resistant			IK-10 Impact-Resistant
	Color	Ivory (Pantone [®] Cool Gray 1C)		Color	Ivory (Pantone [®] Cool Gray 1C)
	Dimensions	Ø 8.9" (227.4mm) x 1.8" H (46.5mm)		Dimensions	Ø 7.87" (200mm) x 1.6" H (40.79mm)
	Weight	w/o Camera 1.22lbs (0.55kg)		Weight	w/o Camera 0.85lbs (0.39kg)
		Ø 8.9" (227.4mm) Ø 4.7" (120mm)		Ø 7.8" (200mm)	
	1-1/2" NP (38mm)	T Ø 0.5" (14mm)			



Ø 7.8^u (200mm)



Standard Dome


Accessories

SV-CA Mounting C		c (UL) US	MD-CA Mounting C		c UL) us
		 Features: Easy Installation and Superior Design Heavy Duty Enclosure Protection for Applications in Harsh Environments Die-Cast Aluminum is Resistant to Impact and Salt Damage 			 Features: Easy Installation and Superior Design Heavy Duty Enclosure Protection for Applications in Harsh Environments Die-Cast Aluminum is Resistant to Impact and Salt Damage
Compatibility		1.5" NPT standard nundVideo [®] ** and SurroundVideo® G5	Compatibility	Works with Meg	h 1.5" NPT standard gaDome® 4K, MegaDome® Series, ®G5 Mini and MegaVideo® Compact D4SO
Mechanical	Casing	Die-Cast Aluminum IP66 Weather Proof Standard IK-10 Impact-Resistant	Mechanical	Casing	Die-Cast Aluminum IP66 Weather Proof Standard
	Color Dimensions Weight	Ivory (Pantone® Cool Gray 1C) Ø 7.4" (189mm) x 4.33" H (110mm) w/o Camera 1.47lbs (0.69kg)		Color Dimensions Weight	IK-10 Impact-Resistant Ivory (Pantone® Cool Gray 1C) Ø 6.06" (154.1mm) x 2.57" H (65.3mm) w/o Camera 1.02lbs (0.465kg)
		0 1.44° (1691m) Ø 1.97" (50mm)			Ø 6.06" (154.1mm) Ø 1.5" (38mm)
	4.33" (110mm)	1-1/2" NPT (38mm)		2.57^u (65.3mm)	1-1/2ª NPT (38mm)




** SurroundVideo models with WDR are compatible with MD-CAP and AV-FMA accessories due to their smaller form factor housing

Cameras Made in the USA

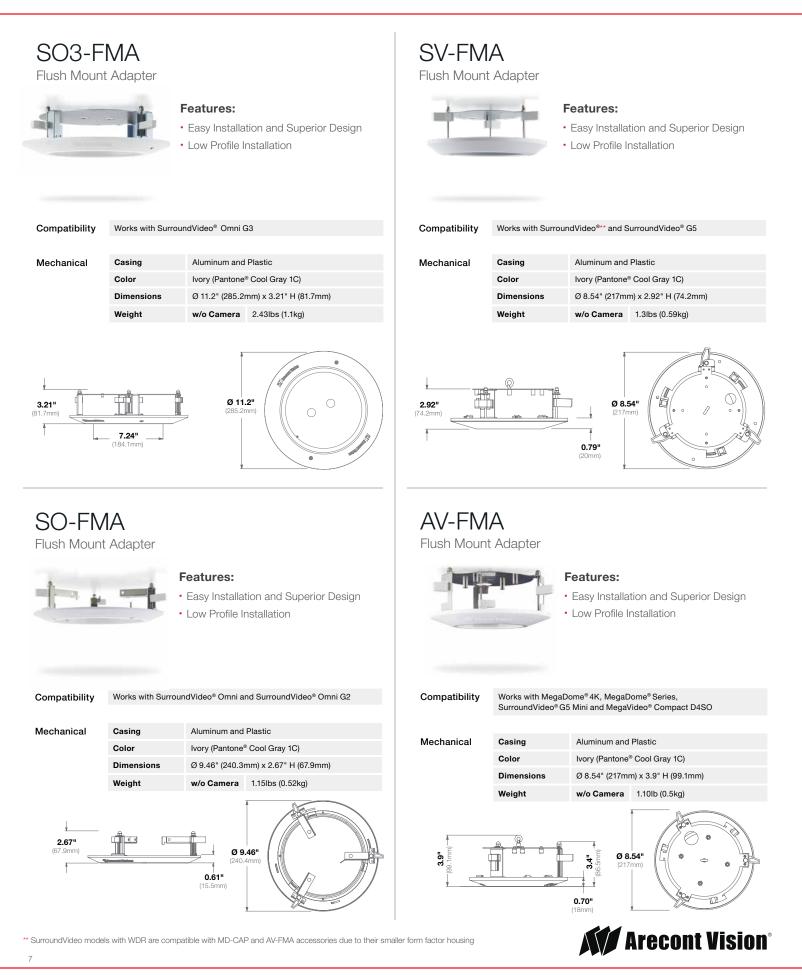

Cameras Made in the USA

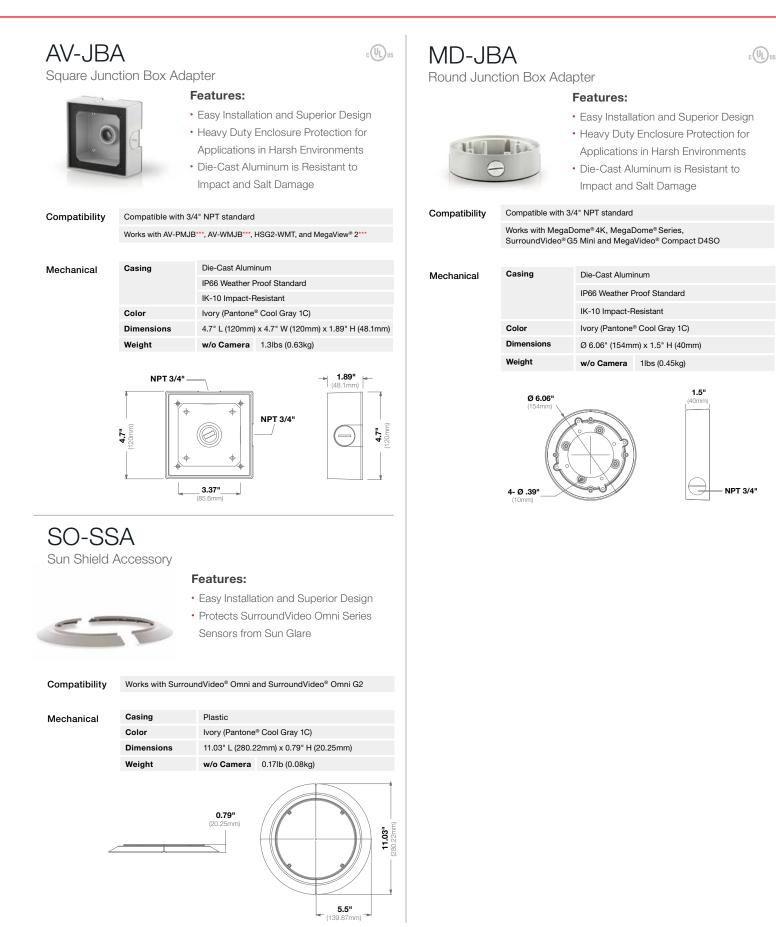



Rev 004.001 © 2017 Arecont Vision[®]. All rights reserved. Arecont Vision, the Arecont Vision logo, and MegaBall, MegaDome, MegaView, MegaVideo, MicroDome, MicroBullet, and SurroundVideo are registered trademarks of the company.

Arecont Vision®