

Datasheet

T2GE-12G/D - Weatherproof and dustproof electric strike

Product Description

The T2GE-12 has been designed for special installations where waterproof and dustproof features are required, such as outside installations and sterile environments (not suited for salt environments). It features a protected gasket seal and has a holding force of over 400kg measured at the jaw.

The series also features a manual hold-open function and built-in MOV (metal oxide varistor), offering a unique product for external pedestrian gates. The MOV protects your system from electric spikes that can cause damage to electronic control devices.



T2GE-12D

T2GE-12G

Key Features

- Fail secure strike
- High resistance to dust and outside weather conditions
- Gasket sealed
- Handed: left or right version
- Manual hold-open function
- Built-in MOV

 Certification

 DEEE

RoHS Certification

 IP65


 -15°C to 40°C

Product Specifications

Material:	306 Stainless steel (faceplate only)
Mounting:	Mortice
Lock mode:	Fail secure
Handed:	Left or right
Holding force:	450kg
Cycles tested:	300,000 operations
Jaw type:	Fixed
Weight:	0.4
Dimensions:	
• Strike:	100 x 21.5 x 37 mm
• Faceplate:	250 x 25 x 3 mm

Electrical Specifications

Power input:	12Vac/dc
Consumption:	370mA @ 12Vac 580mA @ 12Vdc

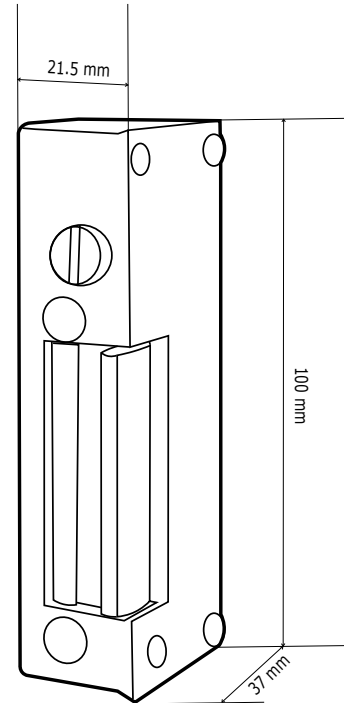

Range References

F0511000052	T2GE-12G	Weatherproof and dustproof electric strike, left-handed
F0511000051	T2GE-12D	Weatherproof and dustproof electric strike, right-handed