



Ensuring two-way voice help is within reach from every corner



STCB-3

Emergency Intercom Call Box

- Emergency intercom call box that can communicate with monitoring centers, and with in-house voice extenders (VCP-2-SFV).
- Support 4 voice call points (VCP-2-SFV) to achieve intercom emergency coverage by placement at multiple locations
- Outstanding two-way voice communication

STCB-3

Emergency Intercom Call Box




The STCB-3 is a next-generation emergency intercom call box that empowers long-range communication with monitoring centers, as well as seamless communication with in-house voice extenders (VCP-2-SFV). STCB-3 not only can integrate with multiple devices/sensors as a panel, it can also work with voice extenders to communicate with different in-house locations, ensuring immediate and coordinated response anytime, anywhere as a comprehensive system.

The STCB-3 boasts an intuitive two-button design. Pressing the help button on the left instantly sends a notification to designated monitoring centers, triggering a swift response. For situations requiring assistance within the house, the assistance button on the right initiates a call to voice call points, alerting occupants of the emergency. The STCB-3 supports up to 4 voice call points, enabling intercom functionality by placement at various locations within the house for a comprehensive multi-location emergency system, ensuring that users never miss crucial help.

The emergency alarm system seamlessly integrates with multiple devices/sensors, including emergency pendants, wrist transmitters, fall sensors, PIR motion sensors, smoke detectors, and more, ensuring that elders can receive immediate assistance in the most straightforward manner, anytime and anywhere. The STCB-3 offers a compact size and user-friendly design, making it perfect for nursing homes or individual elder's residences.



2-button design for either notifying monitoring center or in-house personnel



Two-way communication with long range up to 6 meters







Integration with multiple sensors at different locations



Supports installation with RF voice communication up to 550m between call box and voice extenders

Empowering Emergency Communication

Emergency intercom call boxes can directly communicate with monitoring centers, while 4 voice call points achieve intercom emergency coverage and two-way communication to immediately alert the corresponding personnel at all placed locations.

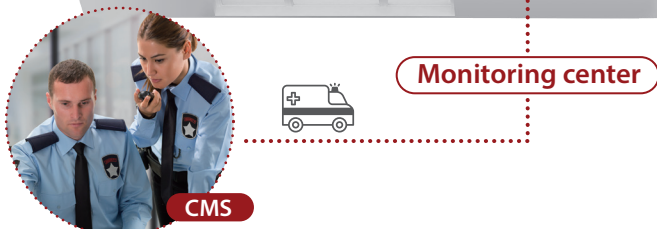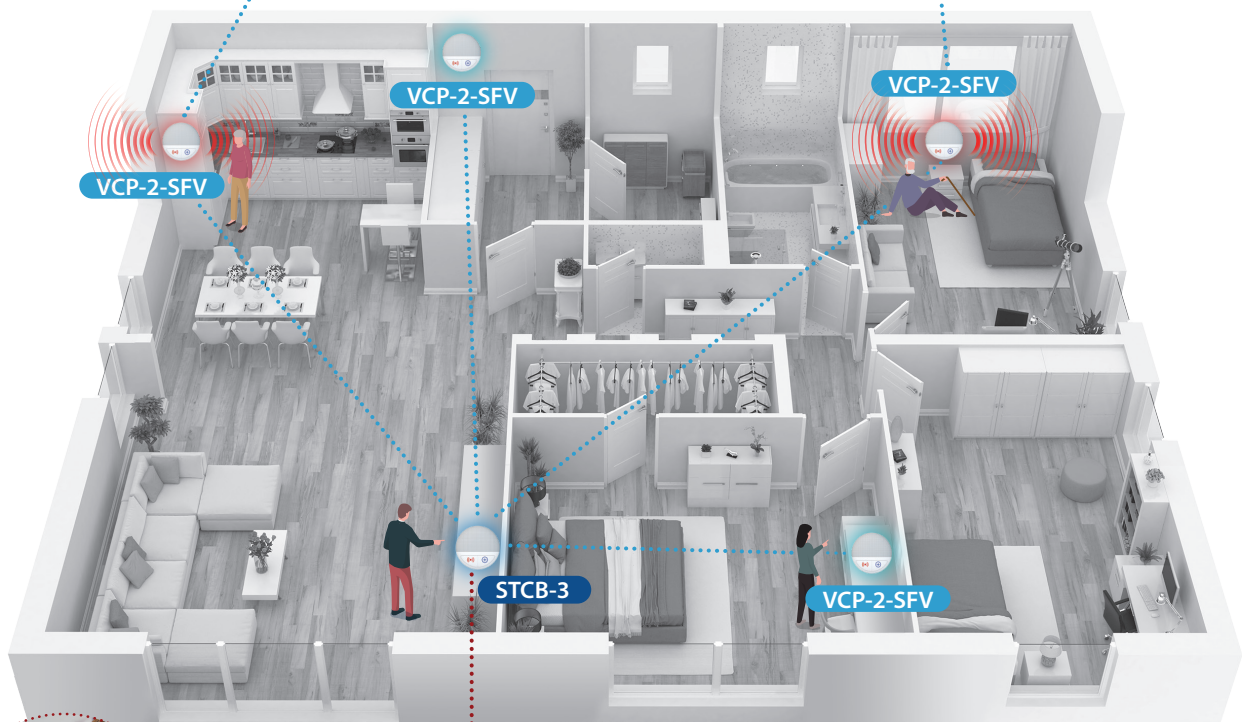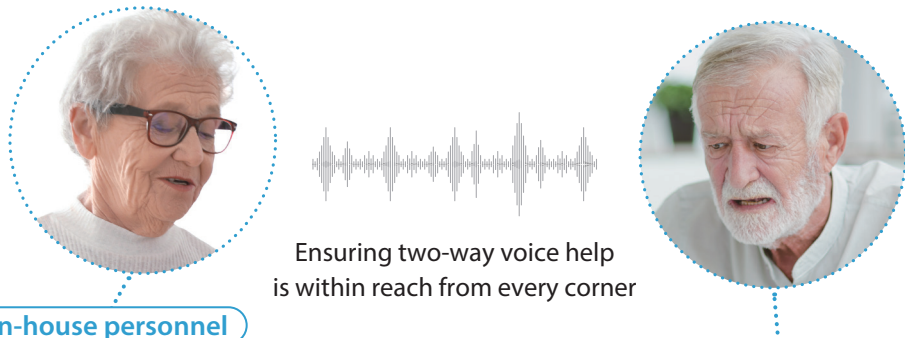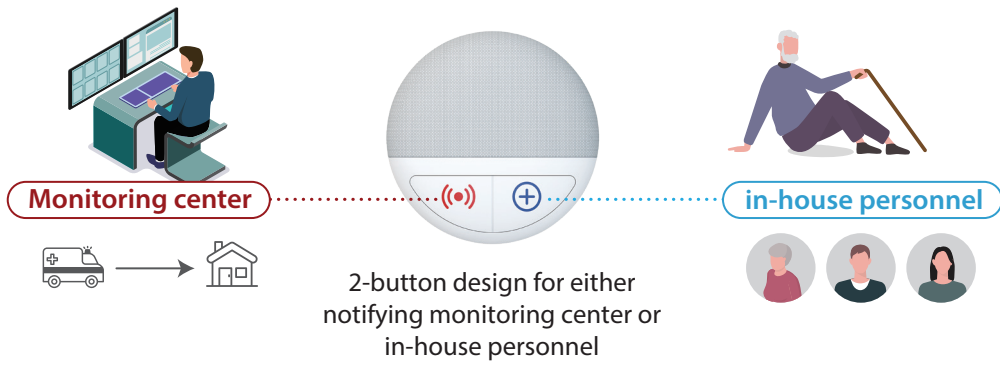

Emergency Standalone Intercom Call Box



STCB-3

- Emergency intercom alarm gateway call box
- Supports 4 in-house voice extenders (VCP-2-SFV)
- Hands-free two-way communication up to 6 meters
- Comes with two-button design, either to connect to monitoring centers for intercom communication within the house
- Integration with up to 20 sensors: Wrist transmitter, emergency pendant, fall sensor, PIR motion sensor, panic button, smoke detector, water leakage sensor, CO sensors, and heat detector
- Remote firmware updates via OTA (Over the Air)

Emergency Voice Call Point



VCP-2-SFV

- Voice extenders that can integrate with STCB-3 gateway call box
- Intercom communication range between panel and devices up to 550 meters
- Hands-free Two-way communication up to 6 meters

Specifications

STCB-3

Frequencies	EU: 869 MHz (RF) / 864.5 MHz (SFV) US: 919 MHz (RF) / 917.5 MHz (SFV)
RF Range	900m
Two-way communication Range	550m
Power Source	9V 1A
Backup Battery	6V 850mAh Ni-Mh rechargeable battery pack
Backup Battery Life	30 hours
Speaker	1.5W
Frequency band (LTE)	EU: B1 (2100 MHz) / B3 (1800 MHz) / B7 (2600 MHz) / B8 (900 MHz) / B20 (800 MHz) / B28 (700 MHz)
Frequency band (3G)	EU: B1 (2100 MHz) / B8 (900 MHz)
Operating Temperature	-10°C to 45°C (14°F to 113°F)
Operating Humidity	Up to 85% non-condensing
Dimensions	121mm x 121mm x 52mm

**Note: Actual battery life may vary with product settings, operating environment, and usage patterns.*

VCP-2-SFV

Frequencies	EU: 869 MHz (RF) / 864.5 MHz (SFV) US: 919 MHz (RF) / 917.5 MHz (SFV)
Two-way communication Range	550m
Power Source	Three 1.5V AA Alkaline batteries
Battery Life	1.9 years
Speaker	1.5W
Operating Temperature	-10°C to 45°C (14°F to 113°F)
Operating Humidity	Up to 85% non-condensing
Dimensions	112mm x 112mm x 52mm

** Note: Actual battery life may vary with product settings, operating environment, and usage patterns.*

Ordering Information

STCB-3 Emergency Standalone Intercom Call Box

VCP-2-SFV Emergency Voice Call Point