

4/8/16 Channel Effio 960H 1U Standalone DVR



Features

- > Up to 4/8/16 Effio cameras with 1080p realtime preview
- > H.264 dual-stream video compression
- > Full channel@960H(960×576/960×480) realtime recording
- > HDMI / VGA / TV / Spot simultaneous video output
- > All channel synchronous realtime playback, GRID interface & smart search
- > 3D intelligent positioning with Dahua PTZ dome camera
- > Support 2 SATA HDDs up to 8TB, 2 USB2.0
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS



Technical Specifications


Model		DH-DVR0404HF-A-E	DH-DVR0804HF-A-E	DH-DVR1604HF-A-E	
System					
Main Processor		Dual-core embedded processor			
Operating System		Embedded LINUX			
Video					
Input		4 channel, BNC	8 channel, BNC	16 channel, BNC	
Standard		NTSC/ PAL, Effio 960H camera			
Audio					
Input		4 channel, BNC	8 channel, BNC	16 channel, BNC	
Output		1 channel, BNC			
Two-way Talk		1 channel Input, 1 channel Output, BNC			
Display			·		
Interface		1 HDMI, 1 VGA, 1 TV, 1 Spot, BNC(1.0Vp-p, 75Ω)			
Resolution		1920×1080, 1280×1024, 1280×720, 1024×768			
Display Split		1/4	1/4/8/9	1/4/8/9/16	
Privacy Masking		4 rectangular zones (each camera)			
OSD		Camera title, Time, Video loss, Camera lock, Motion detection, Recording			
Recordi	ng				
Video/Audio		H.264 / G.711			
Compression					
Resolution		960H(960×576/960×480)/D1/4CIF(704×576/704×480) /			
		HD1(352×576/352×480) / 2CIF(704×288/704×240) /			
		CIF(352×288/352×240) / QCIF(176×144/176×120)			
Record	Main	960H/D1/HD1/2CIF/CIF	(1~25/30fps)		
Rate	Stream:				
	Extra	CIF/QCIF(1~25/30fps)			
	Stream				
Bit Rate		48~4096Kb/s			
Record Mode		Manual, Schedule(Regular(Continuous), MD, Alarm), Stop			
Record Interval		1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300			
		sec			
Video D	etection &	Alarm			
Trigger Events		Recording, PTZ, Tour, Alarm, Video Push, Email, FTP, Spot, Buzzer &			
		Screen tips			
Video Detection		Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank			
Alarm Input		4 channel	8 channel	16 channel	
Relay Output		3 channel			
Playbac	k & Backup				
Sync Pla	yback	1/4	1/4/9	1/4/9/16	
Search Mode		Time/Date, Alarm, MD 8	& Exact search (accurate t	o second), Smart search	



Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file,		
	Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup		
	selection, Digital zoom		
Backup Mode	USB Device / Network		
Network			
Ethernet	RJ-45 port (10/100M/1000M)		
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE,		
	DDNS, FTP, IP Filter, Alarm Server		
Max. User Access	20 users		
Smart Phone	iPhone, iPad, Android, Windows Phone		
Storage			
Internal HDD	2 SATA ports, up to 8TB		
Auxiliary Interface			
USB Interface	2 ports (1 Rear), USB2.0		
RS232	1 port, For PC communication & Keyboard		
RS485	1 port, For PTZ control		
General			
Power Supply	DC12V/3.3A		
Power Consumption	20W (Exclude HDD)		
Working	-10 ~+55°C / 10~90%RH / 86~106kpa		
Environment			
Dimension(W×D×H)	1U, 375mm×285mm×50mm		
Weight	2.35KG(without HDD)		



System Connection

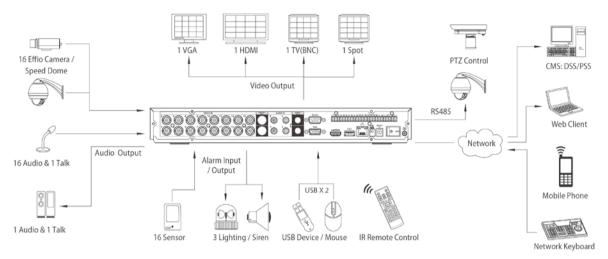

* Take DVR1604HF-A-E for the example

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883 Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com