


# Flexible Cable Protection Pipe

For use with Explosion-protected Cameras

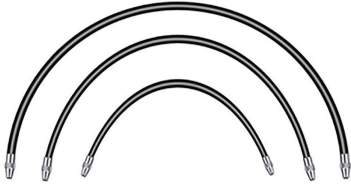

- 316L Stainless Steel Construction
- G-3/4-in. Pipe Thread
- IP68 Ingress Protection
- Designed for Extreme Temperature Environments

## Technical Specifications

|                       |  |
|-----------------------|--|
| Material              | 316L Stainless Steel                         |
| Dimensions (OD x L)   | ø25.0 mm x 1500.0 mm (ø0.98 in. x 59.06 in.) |
| Pipe Thread           | G-3/4 in.                                    |
| Operating Temperature | -40 °C to 60 °C (-40 °F to 140 °F),          |
| Humidity              | Less than 95% RH                             |
| Weight                | 1.5 kg (3.31 lb)                             |
| Ingress Protection    | IP68   |

## Ordering Information

| Type       | Part Number | Description                    |
|------------|-------------|--------------------------------|
| Cable Pipe | DH-GE1500   | Flexible Cable Protection Pipe |

## Dimensions (mm)

