

DH-HDC-HF3200

2Megapixel 1080P HD-SDI Camera



Features

- > 1/3" 2Megapixel Exmor CMOS
- > Standard HD-SDI high definition digital interface (SMPT274/292)
- > 25/30fps@1080p, 50/60fps@720P(1280×720)
- > DWDR, Day/Night(ICR), 2DNR, AWB, Auto iris, AGC, BLC
- > OSD, AC24V/DC12V


DH-HDC-HF3200

Technical Specifications

Model	DH-HDC-HF3200P	DH-HDC-HF3200N
Camera		
Image Sensor	1/3" 2Megapixe Exmor CMOS	
Effective Pixels	1920(H) x1080(V)	1920(H) x1080(V)
Electronic Shutter	Auto/Manual(1/3~1/10000s)	Auto/Manual(1/4~1/10000s)
Image Resolution	25fps@1080p(1920×1080)/720p (1280×720); 50fps@720P(1280×720)	30fps@1080p(1920×1080)/720p (1280×720); 60fps@720P(1280×720)
Min. Illumination	Color: 0.1Lux/F1.2, B/W: 0.01Lux/F1. 2	
S/N Ratio	>52dB	
Video Output	1Vp-p Composite Output (75Ω/BNC)	
HD-SDI Video Output	1ch HD-SDI high-definition video (SMPTE 292M standard)	
Camera Features		
OSD	English, Chinese(Simplified/Traditional)	
Day/Night	Auto(ICR) / Color / B/W	
Backlight Compensation	BLC / DWDR	
White Balance	Auto/ Manual	
Gain Control	Auto / Manual	
Noise Reduction	2D	
Picture Adjustment	Mirror / Brightness / Contrast / Sharpness / Hue / Gain	
Lens		
Lens Type	Manual / Auto iris (DC)	
Mount Type	C / CS	
Auxiliary Interface		
RS485	1 Port	
General		
Power Supply	AC24V±10% / DC12V±10%	
Power Consumption	Max 8.5W	
Working Environment	-10 °C ~+60 °C, 10%~90%	
Dimensions(W×D×H)	70mm×149.5mm×63.2mm	
Weight	0.65Kg	

DH-HDC-HF3200

Dimensions (mm)

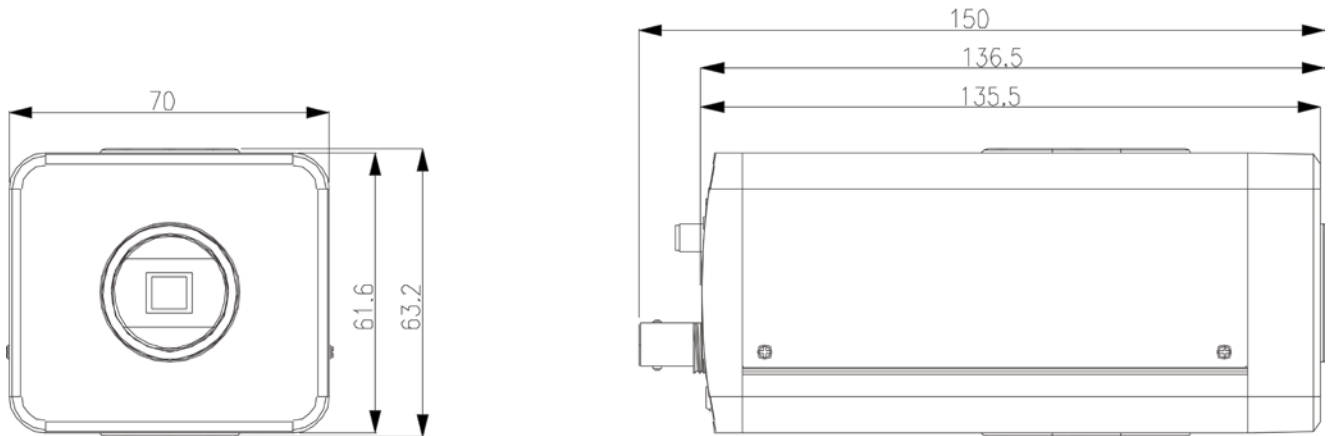

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2012 Dahua Technology Co., Ltd.