

DH-SD40/42/42C212S-HN

2Mp Mini Network PTZ Dome Camera



SD40212S-HN



SD42212S-HN



SD42C212S-HN

Features

- Powerful 12x optical zoom
- Max. 25/30fps@1080P & 50/60fps@720P
- DWDR, Day/Night (ICR), DNR (2D&3D), Auto iris, Auto focus, AWB, AGC, BLC
- Max 300°/s pan speed, 360° continuous pan rotation
- Up to 255 presets, 5 auto scan, 8 tour, 5 pattern
- Built-in 2/1 alarm in/out
- Support intelligent 3D positioning with DH-SD protocol
- IP66, POE+

DH-SD40/42/42C212S-HN

Technical Specifications:


Model	DH-SD40212S-HN	DH-SD42212S-HN	DH-SD42C212S-HN
Camera			
Image Sensor	1/3" Exmor CMOS		
Effective Pixels	1944(H) x 1092(V), 2 Megapixels		
Horizontal Resolution	>1000TVL		
Scanning System	Progressive		
Electronic Shutter Speed	1/3s ~1/30,000s		
Min. Illumination	Color: 0.05 Lux/F1.6, B/W: 0.005Lux/F1.6		
S/N Ratio	More than 55dB		
Video Output	BNC(1.0Vp-p/75Ω), PAL / NTSC		
Camera Features			
Day/Night	Auto(ICR) / Color / B/W		
Backlight Compensation	BLC / HLC / DWDR (Digital WDR)		
White Balance	Auto, ATW, Indoor, Outdoor, Manual		
Gain Control	Auto / Manual		
Noise Reduction	2D / 3D		
Privacy Masking	Up to 24 areas		
Digital Zoom	16x		
Lens			
Focal Length	5.1 mm~61.2mm (12x Optical zoom)		
Max Aperture	F1.2~ F2.1		
Focus Control	Auto / Manual		
Angle of View	51.3° ~ 4.64°		
Close Focus Distance	100mm~1000mm		
PTZ			
Pan/Tilt Range	Pan: 0° ~ 360° endless; Tilt: -2° ~ 90°, auto flip 180°		
Manual Control Speed	Pan: 0.1° ~ 300°/s; Tilt: 0.1° ~ 120°/s		
Preset Speed	Pan: 300°/s; Tilt: 200°/s		
Preset	80(DH-SD) , 255(Pelco-P/D)		
PTZ Mode	5 Pattern, 8 Tour, 5 Auto Scan, Auto Pan		
Speed Setup	Human-oriented focal length/ speed adaptation		
Power up Action	Auto restore to previous PTZ and lens status after power failure		
Idle Motion	Activate Preset/Pan/Scan/Tour/Pattern if there is no command in the specified period		
Time Task	Auto activation of Preset/Pan/Scan/Tour/Pattern by preset-time		
Protocol	DH-SD, Pelco-P/D (Auto recognition)		
Video			
Compression	H.264 / MJPEG		
Resolution	1080P(1920×1080)/720P(1280×720)/D1(704×576/704×480)/CIF(352×288/352×240)		

DH-SD40/42/42C212S-HN


Frame Rate	Main Stream	1080P/D1 (1 ~ 25/30fps) /720P(1~50/60fps)		
	Sub Stream	D1/CIF(1 ~ 25/30fps)		
Bit Rate		H.264: 448K ~ 8192Kbps, MJPEG: 56K ~ 20480Kbps		
Audio				
Compression		G.711a / G.711u (32kbps) / PCM (128kbps)		
Interface		1/1 channel In/Out		
Network				
Ethernet		RJ-45 (10/100Base-T)		
Protocol		IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour		
ONVIF		ONVIF Profile S		
Max. User Access		20 users		
Smart Phone		iPhone, iPad, Android, Windows Phone		
Auxiliary Interface				
Memory Slot		Micro SD, Max 64GB		
RS485		N/A		
Alarm		2/1 channel In/Out		
General				
Power Supply		AC24V/1.5A (±10%), POE+(802.3at)		
Power Consumption		12W, 22W(Heater on)	12W	
Working Environment		-40°C ~ 60°C / Less than 90% RH	-10°C ~ 60°C / Less than 90% RH	
Ingress Protection		IP66		N/A
Vandal Resistance		IK10 (optional)		
Dimensions		Φ186mm×234mm	Φ170mm×155mm	Φ198mm×158mm
Weight		2.3Kg	1.8Kg	2.3Kg

DH-SD40/42/42C212S-HN


Dimensions (mm)

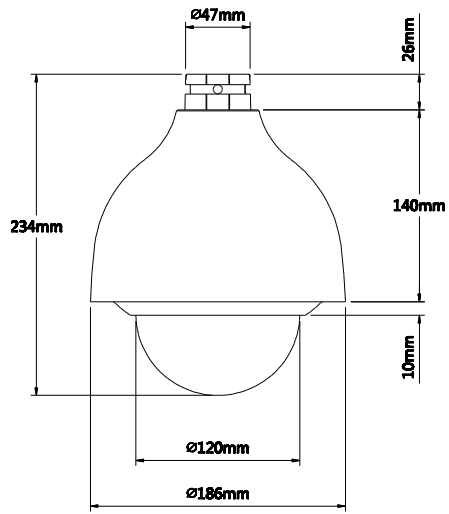

SD40212S-HN

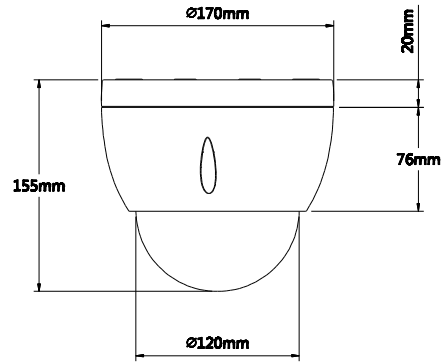

SD42212S-HN

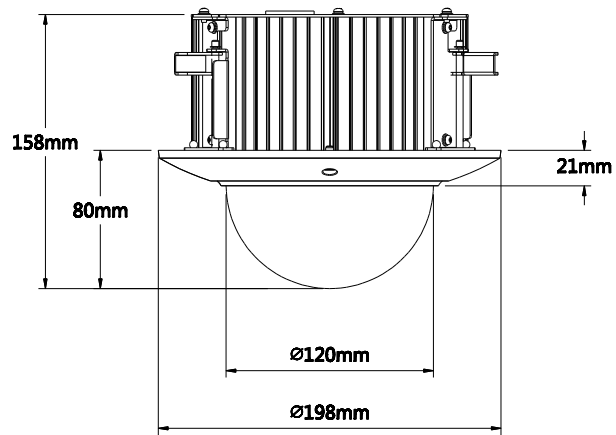

SD42C212S-HN

DH-SD40/42/42C212S-HN

Accessories

SD40212S-HN

DH-PFB300S	DH-PFA110	Power Supply

Accessories (Optional)

SD40212S-HN

DH-PFB300C	DH- PFB301C	DH-PFA112	DH-PFA113

DH-PFB301S	DH- PFA120	DH-PFA150	DH-PFA151

SD42212S-HN

DH-SD40/42/42C212S-HN

			
DH-PFB300S	DH-PFB300C	DH-PFA102	DH-PFA112
			
DH-PFA113	DH-PFA120	DH-PFA150	DH-PFA151

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2013 Dahua Technology Co., Ltd.