


# VT09341D

## Apartment Outdoor Station

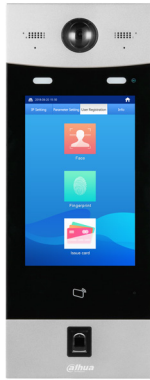

### Features

- 10-inch IPS touch screen
- Night vision
- 2MP CMOS camera
- Unlock via face recognition, password, card, fingerprint and remotely unlock
- Aluminium alloy plate, IP55, IK07
- Support audio and video advertising

### Technical Specification

|       |          |
|-------|----------|
| Model | VT09341D |
|-------|----------|

#### System

|                  |                          |
|------------------|--------------------------|
| Main Processor   | Embedded Micro Processor |
| Operation System | Embedded LINUX OS        |

#### Video

|                   |                 |
|-------------------|-----------------|
| Video Compression | H.264           |
| Image Sensor      | 1/2.7" 2MP CMOS |
| Auto Gain Control | White Light     |
| Lens              | 4mm             |
| Angle of View     | D:105° H:82°    |
| Day/Night         | Color Image     |

#### Audio

|                    |                                     |
|--------------------|-------------------------------------|
| Audio Compression  | G.711                               |
| Audio Input        | Omnidirectional Mic                 |
| Audio Output       | Built-in Speaker                    |
| Bidirectional Talk | Support Dual-way Bidirectional talk |

#### Display

|            |                  |
|------------|------------------|
| LCD Screen | 10" IPS 800x1280 |
|------------|------------------|

#### Operation Mode

|                  |  |
|------------------|--|
| Keypad           | Touch Screen   |
| Reader           | Mifare Card<br>Fingerprint, 3000                               |
| Face Recognition | 10,000 Face data, local recognition<br>Recognition speed: 0.5s |

#### Approaching Induction

|                  |      |
|------------------|------|
| Body Approaching | 0.6m |
|------------------|------|

### Interface

|                |   |
|----------------|---|
| Alarm In/Out   | 2/2   |
| Door Control   | 1 Relay Out<br>1 RS485<br>1 Feedback<br>1 Exit Button |
| Wiegand In/Out | 1/1   |


### Network

|                  |             |
|------------------|-------------|
| Ethernet         | 10M/100Mbps |
| Network Protocol | TCP/IP      |


### General

|                     |                            |
|---------------------|----------------------------|
| Ingress Protection  | IP55, IK07                 |
| Tamper Switch       | 1                          |
| Installation        | Flush                      |
| Material            | Tempered Glass<br>Aluminum |
| Power               | DC 12V, 5A                 |
| Power Consumption   | Standby ≤8W, Work ≤24W     |
| Working Temperature | -20°C~+60°C                |
| Relative Humidity   | 10%~95%RH                  |
| Dimensions          | 475mm×174mm×58mm           |
| Weight              | 2Kg                        |

Dimensions

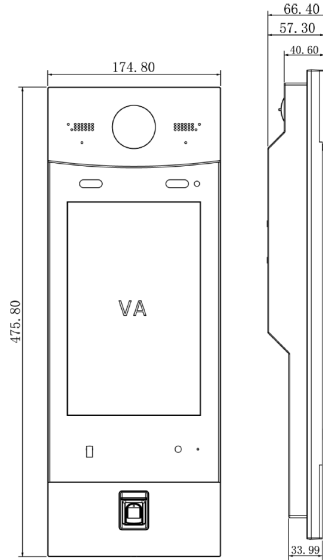

View Area

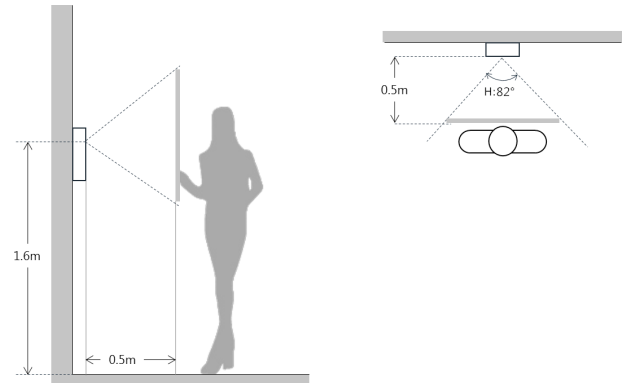

Application

