

## PView Station PVS IV Plus



### PView Station PVS IV Plus

- The PView Station PVS IV Plus is a stand-alone evaluation and management station for Dallmeier digital recorders (DIS, DLS, DMS, DVS). Its powerful Intel Core2Duo CPU enables a smooth video display with high image quality in up to 16 independent splits. The connection between PVS IV Plus and one or more Dallmeier recorders is realised via an IP based network (ISDN optional). All necessary hardware and software is already installed and pre-configured.

#### Features:


- Operating system Windows XP
- Powerful Intel Core2Duo CPU
- DVD-R/RW writer
- 1000 Mbit LAN interface
- HDD capacity min. 160 GB
- 3 external USB 2.0 ports
- Mouse and keyboard included
- Integrated Software PView, PGuard, SmartGUI advance
- Smooth video display in up to 16 Splits with high image quality
- Software protected by USB dongle
- Numerous hard and software options

### Options

- Expansion of hard disk capacity
- Raid 0, 1 or 5 (only with 2 or 3 SATA HDDs)
- Dual Head VGA card (+ max. 4 monitors)
- Terminal Adapter, ISDN card, jog shuttle
- 19" or VdS mounting kit
- Software Autobackup, SenViCon

### Référence

- 200.304.P

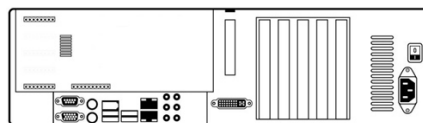

## PView Station PVS IV Plus

processeur	Intel Core2Duo T7200
Chip set	Intel 945GM+
carte mère	Intel GMA 950
carte graphique	Matrox P690 PCIe (optionnel)
mémoire (carte mère)	Min. 1GB
Split display	1, 4, 9, 16
Logiciel de gestion	PView
Logiciel de gestion des alarmes	PGuard
Logiciel de gestion de location	SmartGUI+Editor advance
Logiciel spécifique de gestion	SeMSy (optionnel)
Protection avec mot de passe	Oui, fonction ICR mécanique pour basculement Jour/Nuit
Protection des logiciels	Via dongle
Disques durs échangeables (standard)	1x 3.5"
Échangeable disques durs (optionnel)	1x 3.5"
Disques durs internes (optionnel)	1x 3.5"
Capacité de mémoire maximale	3x 750 GB

### Interfaces

Vidéo OUT	1x VGA, 1x DVI
Audio Line IN	1x
Audio Line OUT	1x
MIC IN	1x
USB	5x USB 2.0
Ethernet	2x RJ45, 10/100/1000 Mbps
Sérielle	1x RS232
PS/2	Souris, clavier
FireWire	1x IEEE 1394
Lecteur	DVD-RW/DL drive (16x/16x/48x)

### Autres spécifications

Voltage	110/230 V AC +/-10%, 50/60Hz
Alimentation	Max. 130 W
Puissance thermique	444 BTU/h
Dimensions (l x H x L)	425 x 133(3HU) x 445 mm
Température	5° to 40° C
Humidité	5 to 70%
ventilateur	3x avec adaptation de la vitesse de rotation automatique
système d'exploitation	Windows XP SP2
Langues	Allemand, anglais, français, espagnol (autres sur demande)