

PView Station PVS IV



PView Station PVS IV

- The PView Station PVS IV is a stand-alone evaluation and management station for Dallmeier digital recorders (DIS, DLS, DMS, DVS). Its powerful CPU enables a smooth video display with high image quality in up to 6 independent splits.
The connection between PVS IV and one or more Dallmeier recorders is realised via an IP based network (ISDN optional). All necessary hardware and software is already installed and pre-configured.

Features:


- Operating system Windows XP
- DVD-R/RW writer
- 1000 Mbit LAN interface
- HDD capacity min. 160 GB
- 3 external USB 2.0 ports
- Mouse and keyboard included
- Integrated software PView, PGuard, SmartGUI advance
- Smooth video display in up to 4 splits with high image quality
- Software protected by USB dongle
- Numerous hard and software options

Options

- Expansion of hard disk capacity
- Raid 1 (only with 2 HDDs)
- Dual Head VGA card (+ max. 4 monitors)
- Terminal Adapter, jog shuttle
- 19" mounting kit
- Software Autobackup

Item number

- 200.304

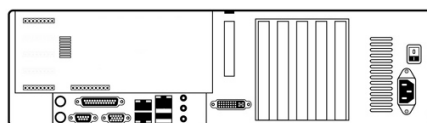

PView Station PVS IV

CPU	Intel Pentium M 1.8 GHz
Chip set	Intel GME 855
Graphics card (main board)	Intel GME 855
graphics card	Matrox P690 PCI (optional)
Memory (main board)	Min. 1GB
Split display	1, 4
Integrated remote software	PView
Integrated alarm management	PGuard
Locations management software	SmartGUI+Editor advance
Customised remote software	SeMSy (optional)
Password protection	Yes
Software protection	Via Dongle
Exchangeable hard disks (standard)	1x 3,5"
Exchangeable hard disks (optional)	1x 3,5"
Internal hard disks (optional)	1x 3,5"
Max. storage capacity	3x 750 GB

Interfaces

Video OUT	1x VGA, 1x DVI
Audio Line IN	1x
Audio Line OUT	1x
MIC IN	1x
USB	3x USB 2.0
Ethernet	3x RJ45, 10/100/1000 Mbps
Serial	1x RS232
Parallel	1x IEEE 1284
PS/2	Mouse, Keyboard
FireWire	1x IEEE 1394
Drive	DVD-RW/DL drive (16x/16x/48x)

Further specifications

Voltage supply	110/230 V AC +/-10%, 50/60Hz
Power consumption	Max. 130 W
Heat power	444 BTU/h
Dimensions (W x H x D)	425 x 133(3HU) x 445 mm
Temperature	5° to 40° C
Humidity	5 to 70%
Ventilator	3x with automatic speed adaptation
Operating system	Windows XP SP2
Languages	German, English, French, Spanish (others on request)