



STAND ALONE CARD READERS

ACCESS CONTROL



THE STAND ALONE DOOR AND GATE CONTROL

- Single door / gate controllers
- Stores up to 1000 device codes
- 2-year limited factory warranty

Model 1520

- Full feature card reader
- Transaction/history buffer stores up to 3,656 events, anti-pass back, time zones, serial output for printer
- Built-in keypad for easy programming
- Controller only version allows you to add almost any 26-bit wiegand device (card reader, keypad, etc.)

Model 1524

- Basic Card Reader for Door or Gate Control
- Programmed with hand held remote or with programming cards

SELF-STORAGE • APARTMENT COMPLEX • GATED COMMUNITIES • RESIDENTIAL • PARKING • APARTMENT/COLLEGE RESIDENTS HALLS • MIXED USE BUILDINGS • COMMERCIAL/INDUSTRIAL



Simple Wiring
easily connects to most electric strikes and magnetic locking devices



Proxmitters
Combines a RF Transmitter with a proximity card tag



1524 Basic
available with or without housing




Weigand Controller
add your own 26-bit wiegand device for use in a stand-alone application


ACCESS CONTROL SOLUTIONS



STAND ALONE CARD READERS ACCESS CONTROL

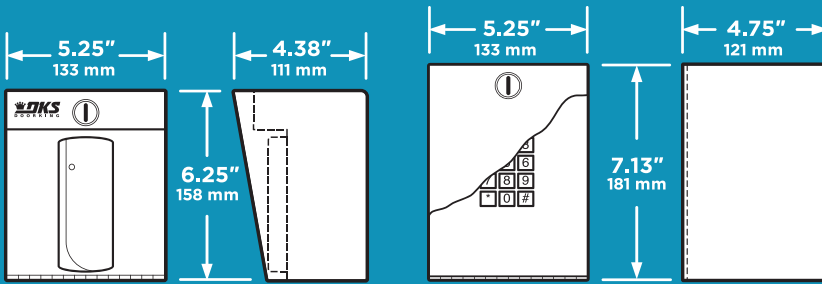

1520 Card Reader and Controller

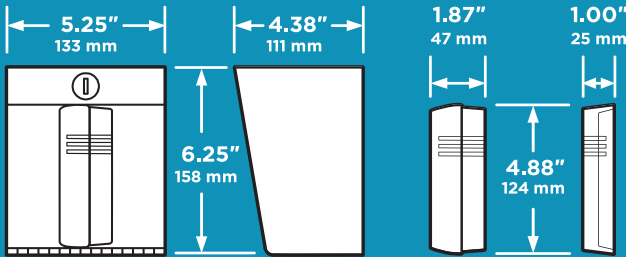

1524 Card Readers

	1520 READER	1520 CONTROLLER	1524 READER
TYPE	Prox Card Reader	Access Controller	Prox Card Reader
MAX CODES	1000	1000	1000
PROG FAC CODES*	10	10	-
TIME ZONES	4	4	-
HOLD OPEN CAPABILITY	Yes	Yes	-
OUTPUT	1 Relay	1 Relay	1 Relay
MAX ACCESS PTS	1	1	1
POWER	16 VAC or 12-24 VDC	16 VAC or 12-24 VDC	12 VDC
RANGE	2-4 inches	-	2-4 inches

* Programmable Facility Codes

TECHNICAL FEATURES

MECHANICAL

1520

Designed for single door or gate stand-alone applications

1000 card code memory

Programming via the built-in programming keypad

Available with DK Prox, AWID, HID readers, or can be ordered as a controller only (add your own 26-bit wiegand device)

Lighted enclosure for outdoor use

Transaction buffer stores last 3656 events

Built-in clock calendar

Four time zones and hold open time zones

Programmable facility codes

Anti-pass back

Print menu and real time print mode (printer not included)

Clock and transaction buffer will maintain data for up to three days in the event of a power failure

1524

Designed for single door or gate stand-alone applications

1000 card code memory

Programming via add/delete programming cards or with a hand-held remote device

Add/delete individual cards or blocks of cards

Available as a card reader only, or mounted on a lighted enclosure for outdoor use

Uses DK Prox cards only

MISCELLANEOUS

Output is a form C dry contact relay rated at 30 Volt, 1 Amp

Operating temperature -31° to 150° F (-35° to 65° C)

Shipping weight approximately 8 Lbs. (3.6 kg)

Card readers are ETL Listed



DoorKing® Inc.

Access Control Solutions since 1948



120 S. Glasgow Avenue,
Inglewood, California 90301 U.S.A.
Tel: 310-645-0023 FAX: 310-641-1586
www.doorking.com

© 2021 All Rights Reserved.
Product specifications may
change without notice. Rev. 5/21



MEMBER:



DISTRIBUTED BY:

