



1803

TELEPHONE ENTRY SYSTEM



Flush Mount

Surface Mount

Exceeding The Standards In Form, Fit, And Function

- Provides visitor access control into apartment buildings, gated communities, condominiums, office buildings, factories and industrial sites
- Visitors use the phone system to communicate with a resident who can grant or deny access via their own touchtone telephone
- Provides service for up to 1000 residents
- Programmable directory codes can be set from 1 to 4 digits
- 2-Year limited factory warranty

**SELF-STORAGE • APARTMENT COMPLEX/GATED COMMUNITIES • PARKING
• APARTMENT/COLLEGE RESIDENTS HALLS • MIXED USE BUILDINGS •
COMMERCIAL/INDUSTRIAL • MAXIMUM SECURITY**



Modular Design
makes installation and service easy



DTMF Tone Output
useable with PBX, KSU and telephone systems with auto-attendants



Two Mount Styles
surface and flush are available




Built-in Display
indicates door/gate has been opened


ACCESS CONTROL SOLUTIONS



1803 TELEPHONE ENTRY SYSTEM

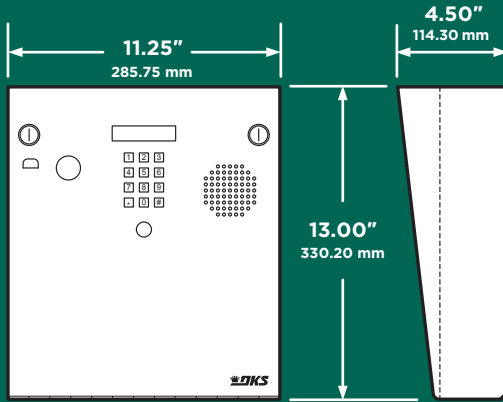

Surface

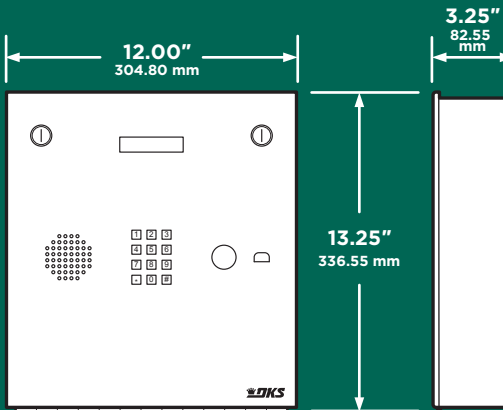

Flush

TECHNICAL FEATURES

MECHANICAL

- Stainless steel faceplate
- Galvanized steel sub-plate
- Metal keypad
- Offset speaker holes for protection
- Hands free voice operation (Optional handset available on surface mount only)
- Surface or Flush mounting styles
- Flush mount requires flush mounting kit
- Enclosures are rated NEMA 4x
- Built-in postal lock provision

ELECTRICAL

- 16 VAC (power transformer included)
- Full Duplex voice communication
- Stores up to 600 phone numbers
- Two relays allow for control of both a vehicular gate and a pedestrian gate
- Programmable directory codes (1 to 4 digits)
- 16 digit dialing capability
- DTMF tone output allows for use with PBX and auto-attendant type phone systems
- Four-digit entry codes = 1000
- Five-digit entry codes = 6
- Built-in clock / calendar
- Time clock has its own backup power source
- Hold open time zones (4)
- Entry code time zones
- Flash entry codes

- Special input can be programmed for relay activation or dial-out function
- Time zone restrictions on selected entry codes
- LCD display for programming assistance and shows 'open' when access is granted

MISCELLANEOUS

- Environmental: 10°F to 145°F (-12°C to 62°C)
- ADA Compliant handset kit (P/N 1807-012) available on surface mount only
- Camera Ready: Optional Color CCTV camera* (may require additional CCTV equipment)
- Shipping weight approximately 15-20 Lbs (6.8-9 kg)



1803 TELEPHONE ENTRY SYSTEM

| | |
|-------------------------------|------|
| PHONE NUMBERS | 600 |
| DIRECTORY NAMES | N/A |
| ENTRY CODES ¹ | 1000 |
| DEVICE CODES ² | 0 |
| RELAYS | 2 |
| AUXILIARY INPUTS ³ | 1 |
| EXPANSION | No |
| PC PROGRAMMABLE | No |
| TEMPORARY CODES | 5 |
| HOLIDAY SCHEDULES | No |

- Entry codes are four (4) digits only and are not the same as device codes. Entry codes grant access when entered on the entry system keypad (or secondary keypad) only.
- Device codes are not used with the 1803.
- 1803 auxiliary input allows a switch closure to activate relay 2, or can be set to auto-dial a preprogrammed telephone number.

DoorKing® Inc.

Access Control Solutions since 1948



120 S. Glasgow Avenue,
Inglewood, California 90301 U.S.A.
Tel: 310-645-0023 FAX: 310-641-1586
www.doorking.com

© 2021 All Rights Reserved.
Product specifications may
change without notice. Rev. 3/21



MEMBER:



DISTRIBUTED BY:

