

Eagle Eye Cloud VMS

WHAT IS THE EAGLE EYE CLOUD VMS?

The Eagle Eye Security Camera VMS is a fully managed cloud video surveillance solution, delivering an end-to-end video management system that's simple to deploy and easy to use. It supports all modern browsers and works on Windows, Mac, even Linux with no plugins to install.

FULLY MOBILE

View video anytime, anywhere. The fully functional iOS and Android applications provide complete access to live and recorded video and can also be used to install, configure and manage the system.



GOT CLOUD?

Eagle Eye Networks provides a cloud based, video management system. The Eagle Eye Bridge is installed onsite, connects to your cameras, records video locally, and then securely synchronizes both video and meta data to the Eagle Eye Cloud Data center. It's a robust, secure appliance specifically designed to overcome the demands of transmitting high-resolution video through the Internet.

COMPREHENSIVE CAMERA SUPPORT

At Eagle Eye Networks we believe camera compatibility is important. There's no need to be locked into a single camera vendor. Businesses need the flexibility to work with the cameras that they choose. Eagle Eye Bridges and CMVRs support ONVIF Profile S IP cameras. Eagle Eye Combo Bridges and CMVRs support IP as well as NTSC and PAL analog cameras. For an up to date list of all compatible cameras visit www.een.com/cameras.

WORRY FREE MANAGEMENT

All of the software in the Eagle Eye Cloud and firmware on the Eagle Eye Bridge is managed and updated by Eagle Eye Networks. The hardware is fully backed by Eagle Eye with full replacement if anything ever goes wrong.

SECURITY SIMPLIFIED

With Eagle Eye Complete Privacy EncryptionTM, video is fully encrypted during transmission and at rest. The Eagle Eye Bridge has no open ports to the Internet, eliminating security vulnerabilities commonly found in other systems and requiring no router or firewall adjustments.

Eagle Eye Compact CMVR



325

The Eagle Eye Cloud Managed Video Recorder (CMVR) stores video and acts as a gateway from your premises to the Eagle Eye Cloud Data Center where your video can also be stored and managed by the Eagle Eye Cloud VMS. It provides video storage, video buffering, a secure connection, bandwidth management, and monitoring of cameras.

These small form factor CMVRs are suitable for applications up to 12 cameras when a server rack is not available. They are suitable for wall or shelf mounting. The CMVR 225/325 is a ruggedized, all aluminum version with a broader industrial temperature range and includes 4 POE ports for direct camera connection. It is sometimes utilized in vehicle applications.

RECORDING FEATURES

- · Video encrypted in transit and at rest
- Fully cloud managed
- Intelligent Bandwidth Management with local buffering
- Motion or continuous recording
- Optional audio recording


WEB INTERFACE & MOBILE FEATURES

- Native iOS and Android apps
- View live and recorded video
- Compatible with all modern browsers
- Motion detection with alerts
- Map and floorplan display

SYSTEM ADMINISTRATION

- 100% browser-based; no software
- Granular user permissions
- Multi-site support
- Point and click video sharing
- Centralized management

Eagle Eye CMVR 224 / 225 / 324 / 325

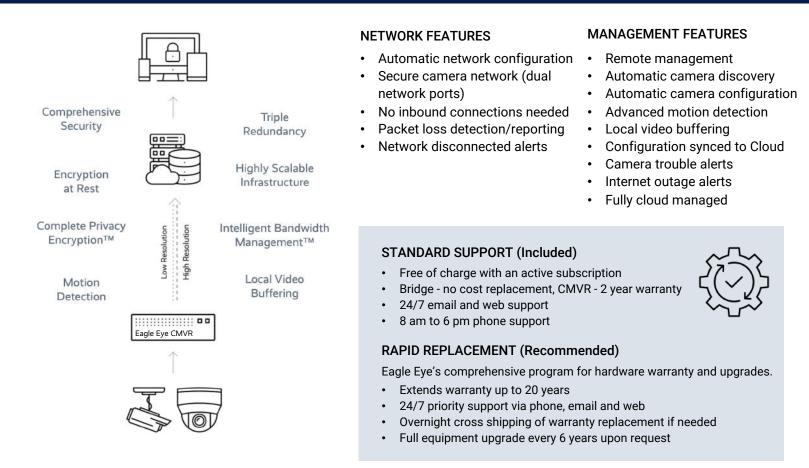

MODEL	CMVR 224	CMVR 225	CMVR 324	CMVR 325
Max Cameras (1MP)*	6 IP	6 IP	12 IP	12 IP
Max Cameras (4MP)*	4 IP	4 IP	8 IP	8 IP
Max Analytic Count*	5	5	5	5
Storage Capacity	1TB 10 days for 6 cameras @ 1MP	1TB 10 days for 6 cameras @ 1MP	2TB 10 days for 12 cameras @ 1MP	2TB 10 days for 12 cameras @ 1MP
POE Camera Ports	None	4 port, Class 3	None	4 port, Class 3
Network Ports	Dual Gigabit	Dual Gigabit	Dual Gigabit	Dual Gigabit
Video Output	HDMI (1), DP (1)	HDMI (1), DP (1)	HDMI (1), DP (1)	HDMI (1), DP (1)
Dimension	125 x 127 x 47 mm 5.00 x 5.01 x 1.75 in	127 x 172 x 75 mm 5.00 x 6.77 x 2.95 in	125 x 127 x 47 mm 5.00 x 5.01 x 1.75 in	127 x 172 x 75 mm 5.00 x 6.77 x 2.95 in
Power	External 100-240 VAC, 20 W	External 100-240 VAC, 22 W	External 100-240 VAC, 20 W	External 100-240 VAC, 22 W
Operating Temperature Range	0-35° C 32-95° F	-10-50° C 14-122° F	0-35° C 32-95° F	-10-50° C 14-122° F
Operating Humidity Range	0-70%	0-70%	0-70%	0-70%
Certifications	FCC, UL, CE, PSE, CCC(S&E), RoHS, ICES-3(B), NMB-3 (B), NDAA	UL, CE, PSE, CB, TIS, NDAA	FCC, UL, CE, PSE, CCC(S&E), RoHS, ICES-3(B), NMB-3 (B), NDAA	UL, CE, PSE, CB, TIS, NDAA
Rapid Replacement Part Numbers	EN-RR224-1 (Monthly) EN-RR224-12 (Yearly)	EN-RR225-1 (Monthly) EN-RR225-12 (Yearly)	EN-RR324-1 (Monthly) EN-RR324-12 (Yearly)	EN-RR325-1 (Monthly) EN-RR325-12 (Yearly)

* Typical - please utilize the Eagle Eye VMS Bridge Wizard for precise capacity

LEARN MORE Visit our website EEN.COM NORTH AMERICA +1-512-473-0500 sales@een.com LATIN AMERICA/CARIBBEAN +52 55 8526 4926 LATAMsales@een.com EUROPE +31 20 26 10 460 EMEAsales@een.com ASIA-PACIFIC +81-3-6868-5527 APACsales@een.com