

TWN4 MULTITECH CORE

PROGRAMMABLE RFID READER/WRITER MODULE FOR LF/HF/NFC WITHOUT ANTENNA



Version C0



Version C1



Version C2

Elatec's TWN4 family of transponder readers and writers allows users to read and write to almost any 125 kHz and 13.56 MHz tags and/or labels – it supports all major transponders from various suppliers like ATMEL, EM, ST, NXP, TI, HID, LEGIC, etc. and ISO standards like ISO14443A/B (T=CL), ISO15693, ISO18092 / ECMA-340 (NFC).

The TWN4 MultiTech Core is designed for integration into machines or any other device to be used with an external antenna (125 kHz, 13.56 MHz or both).

Special features:

- + Powerful SDK for writing apps which are executed directly on the reader
- + Firmware update in the field possible
- + Onboard 18 kB flash storage, e.g. for storing user accessible non-volatile data
- + Direct chip-commands support
- + Supports connection of external ISO7816 compatible SAM cards
- + Supports 50 Ohm external antennas via SMA, SMB, SMC, MCX, UMCC/U.FL connectors
- + CCID and PC/SC 2.01
- + Dedicated expansion bus for connection of LCD, mass storage, etc.
- + Supports quick (re)configuration over network and over wireless interface with TWN4 CONFIG Card
- + TWN4 Upgrade Card for P and PI options available on request
- + 3D construction data (STEP) available on request



Elevator



EV Chargers



Access



Shop POS



Fitness
Equipment



Ticket POS



PC Log-on



Document
Management



Driver ID



Vending



Parking



Gaming



Locker Locks



Time
Attendance



Industrial
PC


TECHNICAL DATA

FREQUENCY	125 kHz (LF) / 13.56 MHz (HF)
ANTENNA	Externally, 50 Ohm for 13.56 MHz – 490 μ H \pm 5% for 125 kHz
DIMENSIONS (L X W X H)	C0 Version: 39 mm x 30 mm x 4.6 mm / 1.54 inch x 1.18 inch x 0.18 inch C1 Version: 39 mm x 30 mm x 8 mm / 1.54 inch x 1.18 inch x 0.31 inch C2 Version: 39 mm x 30 mm x 9 mm / 1.54 inch x 1.18 inch x 0.35 inch
POWER SUPPLY	3.3 V +/- 5% or (by using onboard voltage regulator) 4.3 V - 5.5 V
CURRENT CONSUMPTION	RF field on: 120 mA typically / Sleep: 500 μ A typ. / Cyclic Operation: TBD
TEMPERATURE RANGE	Operating: -25 °C up to +80 °C (-13 °F up to +176 °F) Storage: -45 °C up to +85 °C (-49 °F up to +185 °F)
RELATIVE HUMIDITY	5% to 95% non-condensing
OPERATING MODES (USB)	USB keyboard emulation – USB virtual COM port – CCID / PC/SC 2.01
MTBF	500,000 hours
WEIGHT	Approx. 7 g
SUPPORTED TRANSPONDERS (STANDARD) 13.56 MHZ	<u>ISO14443A:</u> LEGIC Advant ¹⁾ , MIFARE Classic EV1 ²⁾ , MIFARE Classic, MIFARE Mini, MIFARE DESFire EV1, MIFARE DESFire EV2 ²⁾ , MIFARE DESFire Light ³⁾ , MIFARE Plus S, X, MIFARE Pro X ⁴⁾ , MIFARE Smart MX ⁴⁾ , MIFARE Ultralight, MIFARE Ultralight C, MIFARE Ultralight EV1, NTAG2xx, PayPass ⁴⁾ , SLE44R35, SLE66Rxx (my-d move) ⁴⁾ , Topaz <u>ISO14443B:</u> Calypso ⁴⁾ , Calypso Innovatron protocol ⁴⁾ , CEPAS ⁴⁾ , HID iCLASS ¹⁾ , Moneo ⁴⁾ , Pico Pass ⁵⁾ , SRI4K, SRIX4K, SRI512, SRT512 <u>ISO18092 ECMA-340:</u> NFC Forum Tag 1-5, NFC Peer-to-Peer, Sony FeliCa ⁶⁾ , NFC Active and passive communication mode <u>ISO15693:</u> EM4x33 ⁴⁾ , EM4x35 ⁴⁾ , HID iCLASS ¹⁾ , HID iCLASS SE/SR ¹⁾ , ICODE SLI, LEGIC Advant ¹⁾ , M24LR16/64, SRF55Vxx (my-d vicinity) ⁴⁾ , Tag-it, PicoPass ⁵⁾
SUPPORTED TRANSPONDERS (STANDARD) 125 KHZ ⁷⁾	AWID, Cardax, CASI-RUSCO, Deister ⁸⁾ , EM4100, 4102, 4200 ⁹⁾ , EM4050, 4150, 4450, 4550, EM4305 ¹⁰⁾ , FDX-B ¹⁰⁾ , EM4105, HITAG 1 ¹¹⁾ , HITAG 2 ¹¹⁾ , HITAG S ¹¹⁾ , ICT ¹⁰⁾ , IDTECK, Isonas ¹⁰⁾ , Keri, Miro, Nedap ⁸⁾ , PAC ¹⁰⁾ , Pyramid, Q5, T5557, T5567, T5577, TIRIS/HDX ¹⁰⁾ , TITAN (EM4050), UNIQUE, ZODIAC
SUPPORTED TRANSPONDERS (OPTION P)	All Standard Transponders, Cotag, G-Prox ⁸⁾ , HID DuoProx II, HID ISO Prox II, HID Micro Prox, HID ProxKey III, HID Prox, HID Prox II, Indala, ioProx, Nexwatch
SUPPORTED TRANSPONDERS (OPTION PI)	Requires TWN4 SIO Card, All Standard Transponders, All Option P Transponders, HID iCLASS, HID iCLASS SE/SR/Elite, HID iCLASS SEOS (Facility Code/PAC) ¹²⁾
OS SUPPORT	Windows XP, Vista, Embedded CE ¹⁰⁾ , 7 (32-/64-bit), 8, 8.1, 10, Linux, Android ¹⁰⁾ , iOS ¹⁰⁾ , MAC OS X ¹⁰⁾
PERIPHERAL INTERFACES	USB, RS232, 2 x serial (logic level 3.3 V, CMOS 5 V tolerant), I ² C, SPI, 8 GPIOs, CAN ¹⁰⁾ , Clock/Data, Wiegand
TRANSMISSION SPEED	Host: USB Full speed (12 Mbit/s), RS-232: up to 115.200 baud, Air: up to 848 kbit/s
CERTIFICATION(S)	REACH and RoHS-III compliant


ORDER CODE(S)	T4CM-FC0	C0 STANDARD
	T4CM-FC0-P	C0 OPTION P
	T4CM-FC0-PI	C0 OPTION PI
	T4CM-FC1	C1 STANDARD
	T4CM-FC1-P	C1 OPTION P
	T4CM-FC1-PI	C1 OPTION PI
	T4CM-FC2	C2 STANDARD
	T4CM-FC2-P	C2 OPTION P
	T4CM-FC2-PI	C2 OPTION PI

¹UID only ²r/w enhanced security features on request ³In preparation ⁴r/w in direct chip command mode ⁵UID only, read/write on request ⁶UID + r/w public area ⁷125 kHz technology requires a Russian local test and import license from the ministry of Trade and Industry (MINPROMTORC). This license has to be in place before Elatec can accept any order to be shipped to Russia ⁸Hash value only ⁹Only emulation of 4100, 4102 ¹⁰On request ¹¹Without encryption ¹² r/w on request

DRAWING

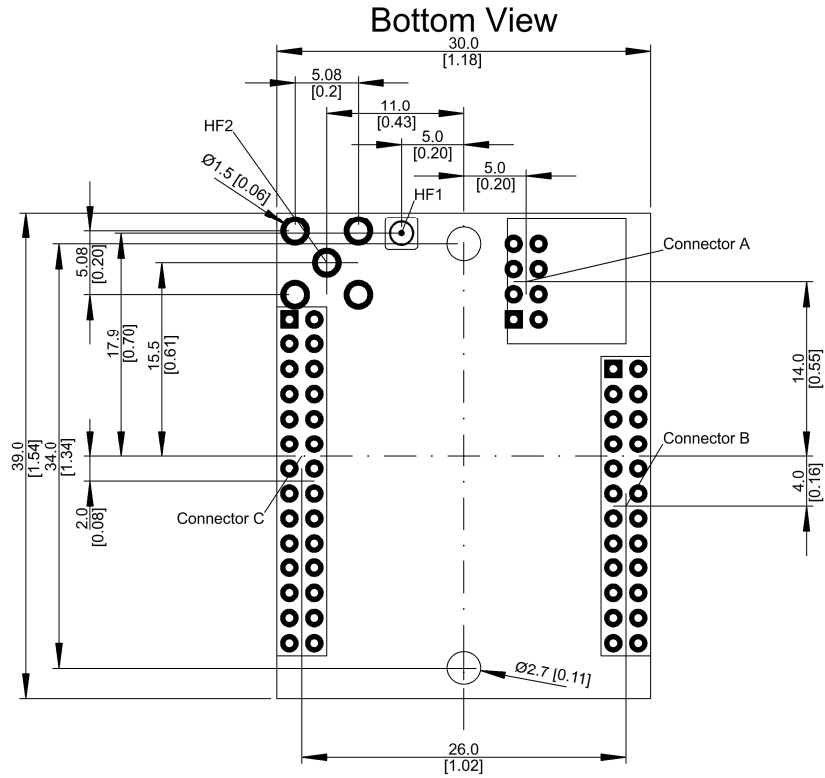

Right View

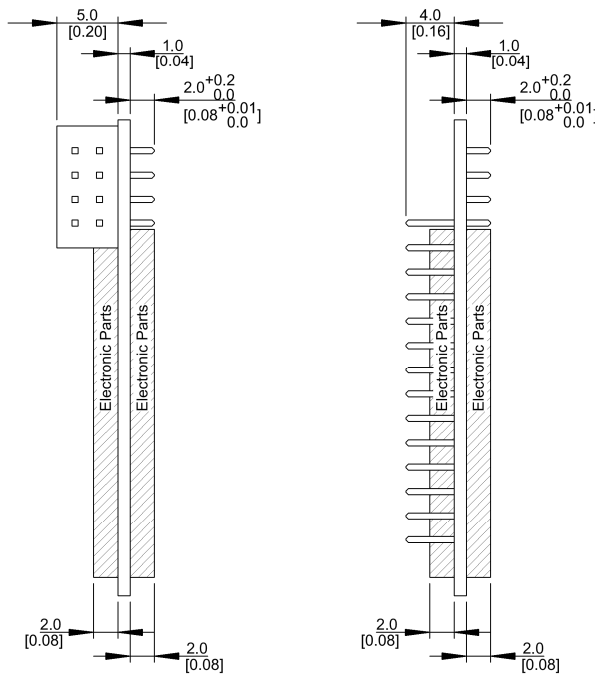

ELATEC GmbH
 Zeppelinstr. 1
 82178 Puchheim • Germany
 P +49 89 552 9961 0 • F +49 89 552 9961 129
 E-Mail: info-rfid@elatec.com
 Website: elatec.com

ELATEC USA Inc.
 4203 SW High Meadows Ave
 Palm City • FL 34990 • USA
 P +1 772 210 2263 • F +1 772 382 3749
 E-Mail: americas-info@elatec.com
 Website: elatec.com

ELATEC Technology (Shenzhen) LLC
 No. 716 Industrial Bank Tower
 Futian District • Shenzhen • China
 P/F +86 755 2394 6014
 E-Mail: apac-info@elatec.com
 Website: elatec.com

ELATEC reserves the right to change any information or data in this document without prior notice. ELATEC declines all responsibility for the use of this product with any other specification but the one mentioned above. Any additional requirement for a specific customer application has to be validated by the customer himself at his own responsibility. Where application information is given, it is only advisory and does not form part of the specification. Disclaimer: All names used in this document are registered trademarks of their respective owners.