

AK-24

SKU: 235339



Dual camera connection box for Bullet or Fix Dome IN-Series cameras

Main Features

Professional installation

Dual camera connection box including switch

Supports PoE standard IEEE 802.3at/af

Maximum power budget 25W

For wall and ceiling surface mounting

Weatherproof IP64

Easy and fast cable connection

Compatible with the following products

IN Series Fix Dome and Bullet Cameras

Specifications

Other	
Dimensions (HxWxD)	see drawing
Remarks	NDAA compliance under Section 889
Trunk	4kV
Internal switching capacity (Gbit/s)	1 Gbps
Internal switching capacity (Mpps)	0,744 Mpps
Parts supplied	mounting accessories
Supply voltage	PoE (IEEE-802.3at),PoE (IEEE-802.3af),PoE, PoE
Series	eneo IN-Series
Housing	plastic
Blower	no
Ethernet interface	100Base-TX, 10Base-T

AK-24

Continuation of the specifications


PoE ports (number)	2
Power consumption	30W max.
Power over Ethernet	IEEE 802.3af, IEEE 802.3at
PoE budget	25 W
Protection rating	IP64
Weight	1.1kg
Farbe	Pantone P 179-1, RAL9003
Gehäuse	plastic
Manufacturer order number	235339

Optional Accessory

SKU	Name	Description
235562	CM-22	Corner mounting adapter for wall bracket WB-24 and PTZ dome camera INP-75A0033MIA
235340	WB-24	Wall bracket for Dual camera connection box AK-24

AK-24

Technical Drawing

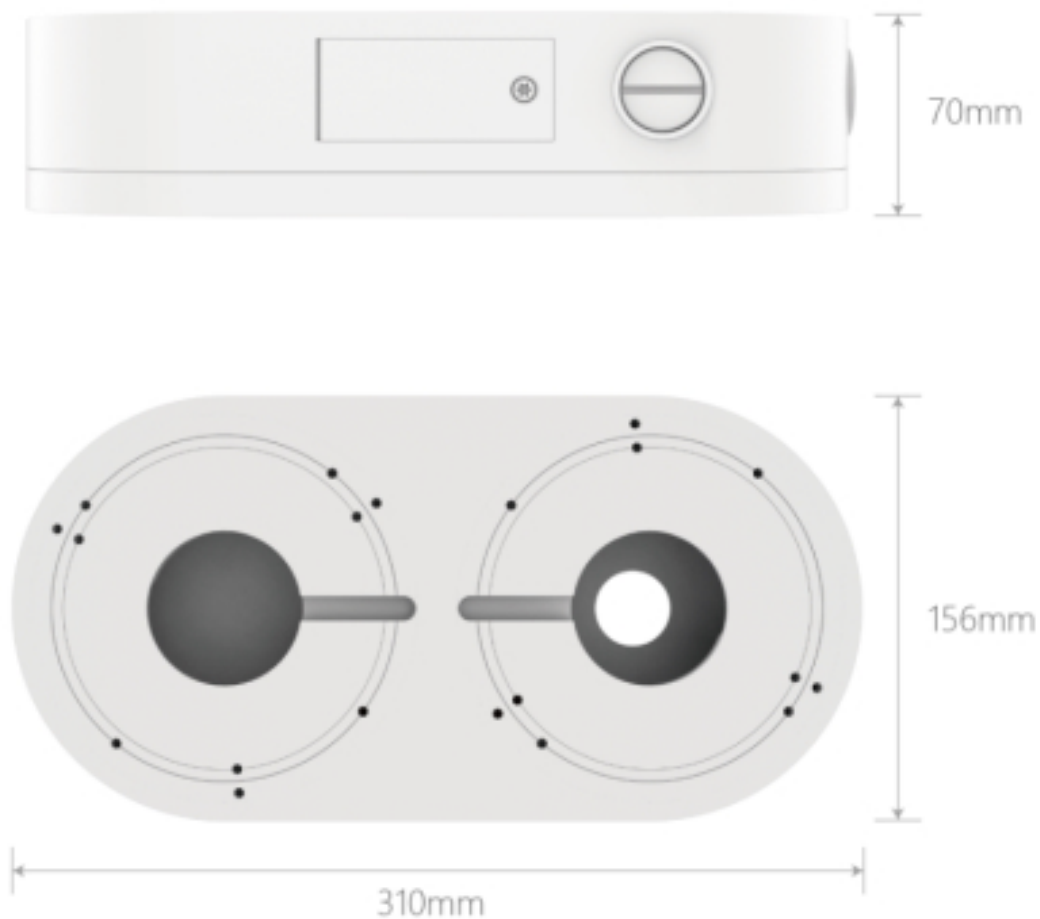

Maße / Dimensions: mm

