

# IPD-62M2713MAA

SKU: 232570



1/2.8" Network Dome, Fix, 1920x1080, Day/Night, DOL-WDR, 2.7-13.5mm, Infrared, IP66

## Main Features

1/2.8" Sony STARVIS CMOS Sensor  
Excellent light sensitivity  
Resolution max. 1920x1080 (Full HD)  
Motorised varifocal lens 2.7~13.5mm  
DOL-WDR (120dB) by triple scan images at 30/25fps  
Motion Detection, Privacy Zones, Slow Shutter

Browser independent (IE, Edge, Safari, Firefox, Chrome)  
Smart Codec H.265 ROI (Region of Interest)  
Supports ONVIF Profile S and Profile T  
Vertical View 90°/270° Modus, H-Flip, Mirror  
Fix Dome Housing (metal), IP66  
Power supply PoE or 12VDC

## Specifications

General:	
Dimensions (HxWxD)	144x109mm
Illumination	4x High Power LED 850nm, Infrared
SDK	upon request
Text display	supplied
Series	eneo AN-Series
Housing	Outdoor
Color (housing)	Pantone Cool Gray 1C
Housing material	Aluminium
Window heater	no
Blower	yes

# IPD-62M2713MAA

## Continuation of the specifications

Mounting	Ceiling mount, Wall mount
Supply voltage	12VDC, PoE
Power consumption	12VDC, 7.5W, PoE
Power over Ethernet	IEEE 802.3af
Vandal proof	yes
Operating temperature	-20°C ~ +50°C
ONVIF	ONVIF Profile S, ONVIF Profile T
Certifications	IK10
Protection rating	IP66
Illumination range	approx. 30m
Weight	780g
DORI:	
Observe (62 px/m)	16,6 - 80,5 m
Recognize (125 px/m)	8,2 - 40,1 m
Identify (250 px/m)	3,9 - 20,1 m
Detect (25px/m)	44 - 198 m
Functions:	
Alarm processing	E-Mail,HTTP,FTP,Boost,TCP,UDP,Onvif Event Mapping
User interface	Type A (orange / grey)
Motion detector	yes
e-PTZ support	yes
Menu languages	English,German,French,Korean
Mirror function	mirror,flip
Multicast compliant	yes
Password protection	administrator & users
Privacy zone masking	Areas-ON/OFF switchable
Web browser	MS internet Explorer: ActiveX ex 9.0,Safari: MJPEG,Mozilla: MJPEG,Google Chrome: MJPEG,Edge: MJPEG
Digital Noise Reduction	yes
Audio support	no
Internal storage	no
Analysis functions	Motion detection, Tampering Detection (TD)
Remote configuration	Browser
Notes:	
Remarks	NDA compliance under Section 889, To guarantee you an optimum user experience, we recommend that you only use components of the same brand in a system. If several brands are used in combination, eneo cannot guarantee functionality. If combined use is necessary, we offer a compatibility check for a fee (for more information, see article number #229235 at VIDEOR).

# IPD-62M2713MAA

## Continuation of the specifications

Camera:	
Imager	Sony STARVIS, Sensor IMX307, CMOS
Automatic electronic shutter (ESC)	1/25 ~ 1/25.000sec
Flickerless function	yes
Backlight compensation	BLC, HLC
Low speed shutter	yes
Manual electronic shutter (MES)	1/25 ~ 1/25.000sec
Signal-to-noise ratio	50dB
Day&Night mode	Automatic, Day, Night, extern (Sensor)
White balance	Automatic, Outdoor, Light bulb, Fluorescent light, Clear Sky, Shade, Manual
Wide Dynamic Range (WDR)	D-WDR
Resolution Standard	HD 1080p
System	True Day&Night
Sensor size	1/2.8"
Day&Night switch	ICR
Sensitivity	0,0008 Lux at F1,6, 40 IRE
Camera type	Dome
Parts supplied:	
Parts supplied	manual, bag of screws
Network:	
Network protocols	TCP/IP, UDP, IPv4, IPv6, HTTP, HTTPS, FTP, UPnP, RTP, RTSP, RTCP, DHCP, ARP, Zeroconf, Bonjour, SNMP
Lens:	
Lens Type	Varifocal (motorized)
Focal Length	2,7 - 13,5 mm
Iris Control	DC
Zoom Factor	4x
Digital Zoom	yes
MOD (Minimum Object Distance)	0,5 m
Interfaces / Inputs/ Outputs:	
External connectors	12VDC input (DC plug), RJ-45
Video outputs	no
Alarm inputs	nein
Alarm outputs	no
Ethernet interface	100Base-TX, 10Base-T
Serial interfaces	Ethernet
Video:	
Resolution	1920x1080 (16:9), 1280x720 (16:9)
Image display	VerticalView 90°/270°, 16:9
Stream types	Multi Streaming
Video compression	H.264, H.264+ (Smart Stream), H.265, H.265+ (Smart Stream), M-JPEG

# IPD-62M2713MAA

Continuation of the specifications




Image resolution max.	1920x1080
Image Transmission Rate	30 fps
Other	
Horizontal Angle of View	108 - 32°
Vertical Angle of View	56 - 18°
Manufacturer order number	232570

## Optional Accessory

SKU	Name	Description
230864	AK-11	Camera junction box for wall and ceiling mounting
215644	DOME-WB3	Wall bracket for eneo Dome Cameras MED-62xxxxxM0A and IED-62xxxxxM0A

# IPD-62M2713MAA

## Technical Drawing

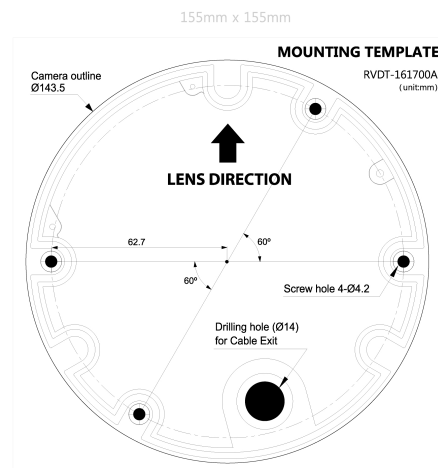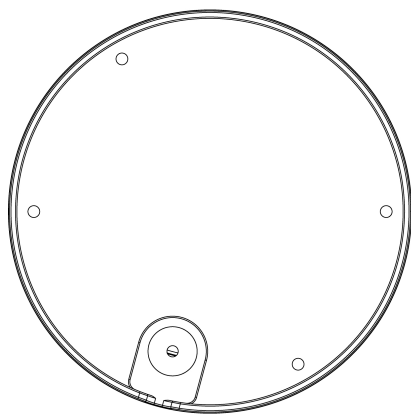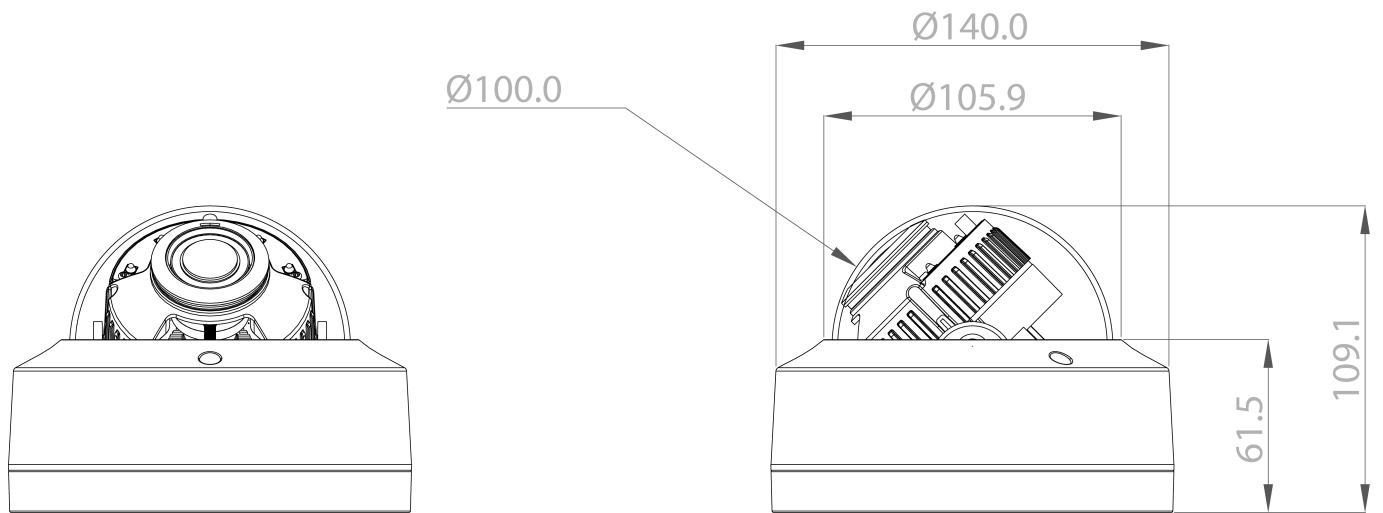

Maße / Dimensions: mm



eneo is a registered trademark of  
VIDEOR E. Hartig GmbH  
Carl-Zeiss-Straße 8

63322 Rödermark, Deutschland

Phone: +49 6074 - 888 - 300  
Fax: +49 6074 - 888 - 100  
E-Mail: [info@eneo-security.com](mailto:info@eneo-security.com)  
Web: [www.eneo-security.com](http://www.eneo-security.com)

Stay informed and subscribe  
to the eneo newsletter

