


REF. 9459 DUOX PLUS VEO-XS WIFI DDA 4.3" MONITOR

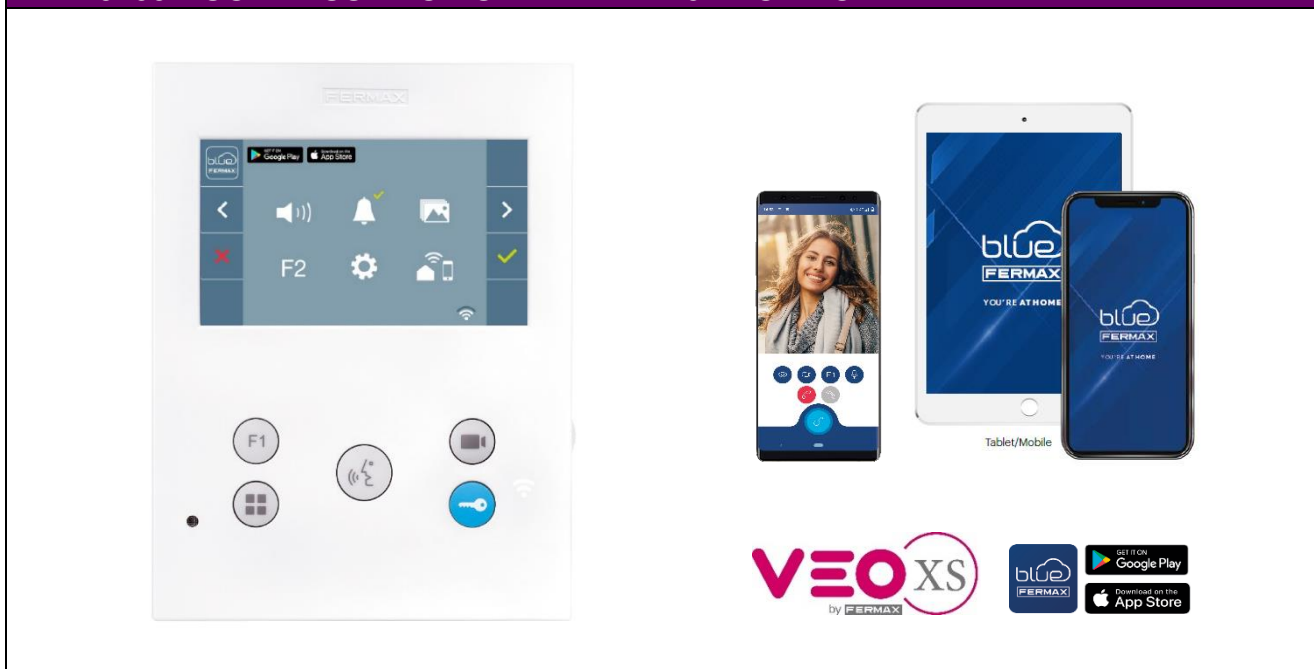

Hands-free DUOX PLUS VEO-XS WIFI monitor is characterised by its small size and extra-flat thickness. Thanks to its OSD menu and the layout of the buttons, interaction with the user is simple and intuitive. Made of high impact ABS plastic. Texturised finish for easy cleaning and ultraviolet protection. VEO-XS WIFI incorporates a 4,3" (16:9) panoramic color TFT screen. Its balanced design of pure lines is distinguishing, modern and minimal.

VEO-XS WIFI is equipped with a Wi-Fi connection that allows calls forwarding to mobile devices. Thanks to the Fermax BLUE app, available free of charge on Play Store and App Store, the functions of the video doorphone can be managed from a smartphone or a tablet, in order to connect you to your home, wherever you are.

ACCESORIES



Ref. 9447



Ref. 9420



Ref. 3388



Ref. 3389

CONNECTOR

9447 DUOX PLUS CONNECTOR
Necessary to mount the monitor on the wall surface.

DESKTOP

9420 VEO-XS MONITOR DESKTOP SUPPORT
Fermax desktop support allows a call from the entrance to be answered from the office desktop. Manufactured in the highest quality stainless steel (AISI 316L). Connector ref. 9447 to be ordered separately. 2 m cable + connection box included.

REPLACEMENT

3388 UNIVERSAL FRAME 120X240
Universal frame with an extra slim format, it is manufactured in a high resistant ABS plastic with a texturised finish. In replacement works, allows to cover the space left by older equipment. In addition, it keeps the wall protected from the dirt produced by the use of telephones and monitors. Dimensions: 120 x 240 x 10 mm.

3389 UNIVERSAL LARGE FRAME 210X240
Dimensions 210 x 240 x 10 mm.

GENERAL CHARACTERISTICS	9459
Technology	DUOX PLUS (non-polarised 2 wire full digital system)
Audio/Video system	Audio/Video Color
Set-up (Installation)	Surface mounted (order connector ref. 9447 separately)
Hands-free communication	Yes
Press-to-talk communication configurable	Yes
Induction loop included	Yes
Screen dimensions	4,3" (Panoramic 16:9)
Screen resolution (H x V)	480 x 272
Color of the product	Matt white
Number of pushbuttons	5
Kind of pushbuttons	Mechanical (silicon)
Number of leds for lighted indications	4 (red, blue, green with different states and white for Wifi)
PROGRAMMING OF THE TERMINAL ADDRESS	
From the terminal	From the OSD menu
From the outdoor panel or guard unit	Yes
From the outdoor panel throughout the apartment door bell	Yes
FEATURES	
Automatic picture capture when the visitor calls (PHOTOCALLER)	Yes (1 photo/call, until 150 photos, 368 x 288 pixels). Disabled by default. To be enabled by the user.
Guard unit call	Yes (by means of the door release button)
Auto-on	Yes (with 3 outdoor panels/cameras)
OSD menu	Yes
Additional function F1	Yes (Button F1 sends a negative and/or command)
Additional function F2	Yes (it only sends command, no negative)
Apartment door bell differentiated from the outdoor panel	Yes
Connection for additional devices (call extension, light/buzzer activator, etc.)	Yes (ref. 2040, ref. 2438, ref. 3267)
Additional terminals on the same address	Yes, max. 2 additional terminals (additional power supply can be required)
Doormatic (automatic door release for offices, etc.)	Yes (configurable until 12h). Green Led ON.
Possible to remotely upgrade the monitor firmware version	Yes
ADJUSTMENTS	
Date and time	Yes (manual & automatically from the internet via wifi)
Ring tones selection	Yes (5)
Call volume control	Yes (10 levels by OSD menu and sliding wheel)
Do-not-disturb mode	Yes (by OSD menu) + Red Led indication
Audio volume control	Yes (10 levels by OSD menu and sliding wheel)
Brightness, color and contrast control	Yes (by OSD menu)
TECHNICAL FEATURES	
Product dimensions (width x height x depth) mm	125 x 165 x 21
Time to answer or open the door since the call is done	30 s.
Conversation time	90 s.
Conversation privacy	Yes
Voltage	18-24 Vdc
Maximum consumption	6.9 W (14.4 W if the induction loop is activated)
Standby consumption (paired and connected)	1.3 W
Working temperature (°C, °F); Humidity	[-5°C, +40°C][23°F, 106°F]; [0%, 90%]
Line adaptor included in the terminal	Yes (A, C, default position OFF)
Connections	Bin, Bin, Bout, Bout, -, A+, F1, T

CALL FORWARDING (APP FOR SMARTPHONES & TABLETS)	
Call forwarding to smartphones and tablets	Yes (App Compatible with iOS>=11; Android>=6)
Connectivity	Wifi (2,4 Ghz) and 3G/4G
Pairing of the monitor with the wifi router of the house.	Once the App is installed, the user must register first. Pairing by scanning a QR code in the monitor menu.
Maximum number of apartments that can be managed from the App	No limit
Maximum number of smartphones/tablets where call divert from the same house can be used.	10 (including administrator's and invited user's devices)
Maximum number of users that can be invited by the administrator	5
Calls reception	Audio and Video from outdoor panels/concierge units. With pre-view before audio communication is on
Conversation time	90 s.
Mute	Yes
Video off	To reduce the data consumption when being in 4G mode
Switching of outdoor panels/cameras	Yes. It allows for switching to other panels/cameras (if any) with the same sequence than the monitors
Auto-on	Yes. Communication possible with 3 outdoor panels/cameras without being called
Activate additional feature (stairlight relay, second door, etc.)	Yes. F1 button.
Door opening	Yes, protected by the unblocking code of the smartphone/tablet: PIN, fingerprint, pattern or face ID.
Concierge call	Yes
Calls register	Yes (answered calls in green; missed calls in red)
Settings	Name and picture of the house; Do not disturb; Change password; Ringtone selection and vibration mode.
Picture & Video capture	Not from the APP. Only automatically from the monitor
Available languages	16 (Spanish, English, French, German, Portuguese, Finnish, Czech, Polish, Dutch, Norwegian, Greek, Danish, Swedish, Hebrew, Russian, Arabic)