





REF. 9478 DUOX PLUS VEO-XL DDA 7" MONITOR

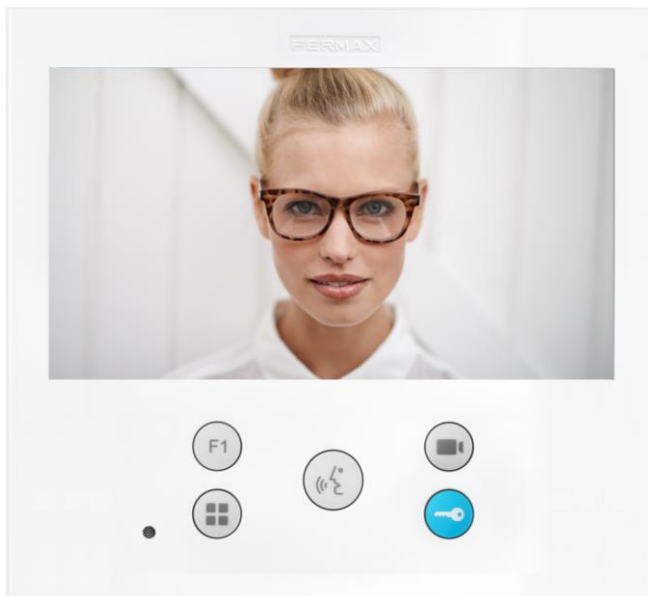

Hands-free DUOX PLUS VEO-XL monitor is characterized by its small size and extra-flat thickness. Thanks to its OSD menu and the layout of the buttons, interaction with the user is simple and intuitive. Made of high impact ABS plastic. Texturised finish for easy cleaning and ultraviolet protection. VEO-XL incorporates a 7" (16:9) panoramic color TFT screen. Its balanced design of pure lines is distinguishing, modern and minimal.

When a call is received, the image appears automatically. When the  button is pressed a conversation with the visitor can take place. The image is de-activated automatically after 90 seconds, or when the  button is pressed again. To open the door, press the button .

ACCESORIES



Ref. 9447

CONNECTOR

9447 DUOX PLUS CONNECTOR
Necessary to mount the monitor on the wall surface. Dimensions: 147 x 100 x 13.5 mm



Ref. 9420

DESKTOP

9420 VEO-XS/VEO-XL MONITOR DESKTOP SUPPORT
Fermax desktop support allows a call from the entrance to be answered from the office desktop. Manufactured in the highest quality stainless steel (AISI 316L). Connector ref. 9447 to be ordered separately. 2 m cable + connection box included.



Ref. 3389

REPLACEMENT

3389 UNIVERSAL LARGE FRAME 210X240
Universal frame with an extra slim format, it is manufactured in a high resistant ABS plastic with a texturised finish. In replacement works, allows to cover the space left by older equipment. In addition, it keeps the wall protected from the dirt produced by the use of telephones and monitors. Dimensions 210 x 240 x 10 mm.

| GENERAL CHARACTERISTICS | 9478 |
|--|---|
| Technology | DUOX PLUS (non-polarised 2 wire full digital system) |
| Audio/Video system | Audio/Video Color |
| Set-up (Installation) | Surface mounted (order connector ref. 9447 separately) |
| Desktop support | Yes (ref. 9420) |
| Hands-free communication | Yes |
| Press-to-talk communication configurable | Yes |
| Induction loop included | Yes |
| Screen dimensions | 7" (Panoramic 16:9) |
| Screen resolution (H x V) | 800 x 480 |
| Color of the product | Matt white |
| Number of pushbuttons | 5 |
| Kind of pushbuttons | Mechanical (silicon) |
| Number of leds for lighted indications | 3 (red, blue, green with different states) |
| PROGRAMMING OF THE TERMINAL ADDRESS | |
| From the terminal | From the OSD menu |
| From the outdoor panel or guard unit | Yes |
| From the outdoor panel throughout the apartment door bell | Yes |
| FEATURES | |
| Automatic picture capture when the visitor calls (PHOTOCALLER) | Yes (1 photo/call, until 150 photos, 368 x 288 pixels). Disabled by default. To be enabled by the user. |
| Guard unit call | Yes (by means of the door release button) |
| Auto-on | Yes (with 3 outdoor panels/cameras) |
| OSD menu | Yes |
| Additional function F1 | Yes (Button F1 sends a negative and/or command) |
| Additional function F2 | Yes (it only sends command, no negative) |
| Apartment door bell differentiated from the outdoor panel | Yes |
| Connection for additional devices (call extension, light/buzzer activator, etc.) | Yes (ref. 2040, ref. 2438, ref. 3267) |
| Additional terminals on the same address | Yes, max. 2 additional terminals (additional power supply can be required) |
| Doormatic (automatic door release for offices, etc.) | Yes (configurable until 12h). Green Led ON. |
| ADJUSTMENTS | |
| Date and time | Yes |
| Ring tones selection | Yes (5) |
| Call volume control | Yes (10 levels by OSD menu and sliding wheel) |
| Do-not-disturb mode | Yes (by OSD menu) + Red Led indication |
| Audio volume control | Yes (10 levels by OSD menu and sliding wheel) |
| Brightness, color and contrast control | Yes (by OSD menu) |
| TECHNICAL FEATURES | |
| Product dimensions (width x height x depth) mm | 185 x 185 x 21 |
| Time to answer or open the door since the call is done | 30 s. |
| Conversation time | 90 s. |
| Conversation privacy | Sí |
| Voltage | 18-24 Vdc |
| Maximum consumption (W) | 9 W (15.6 W if the induction loop is on) |
| Standby consumption (W) | 1.15 W |
| Working temperature (°C, °F); Humidity | [-5°C, +40°C][23°F, 106°F]; [0%, 90%] |
| Line adaptor included in the terminal | Yes (A, C, default position OFF) |
| Connections | Bin, Bin, Bout, Bout, -, A+, F1, T |

