

# SAM-21M

## 21" Color CCTV Monitor




### Rear Panel



### Front Panel



### Dimension

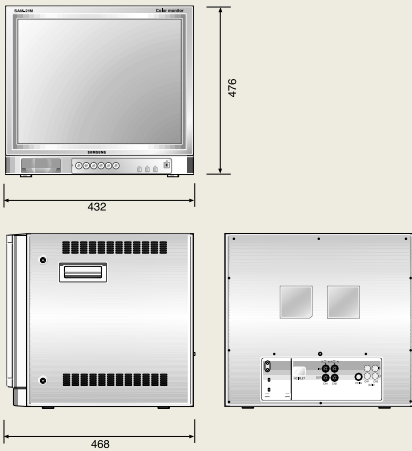

### Features

- Horizontal Resolution 450TV lines
- NTSC / PAL Selectable
- Three looping Video input (2 composite, 1 Y/C)
- Universal power Supply (100~240VAL, 50/60Hz)
- Metal Cabinet ● Built-in Speaker ● OSD Function
- Approval:UL, FCC, CE, CSA, DHHS

### Specification

	Model	SAM-21M
GENERAL	Color System	NTSC / PAL
	Power Source	90-260VAC, 50/60Hz
	Power Consumption	72W
	Picture tube	21" Line Gun, Semi Tinted CRT
	Video Impedance	75Ω BNC
	Speaker	70 x 40mm, 3W 80hm
	Operating temperature	0°C-40°C
	Operating humidity	35 %-80%
	Dimension(W x H x D)	476(W) x 432(H) x 468(D)
	Weight	About 26.8Kg
ENCLOSURE	Enclosure	Metal
	Resolution	450TV Lines(at center)
VIDEO	Input Level	1.0 ± 0.2Vp-p, 75Ω
	Output Level	1.0 ± 0.2Vp-p, 75Ω
AUDIO	Input Level	RCA Jack Type 300 ± 50mVrms
	Sound Distortion	Less than 10%
	HUM	Less than 10m Vrms
	BUZZ	Less than 200m Vp-p
Control & Switch JACK & Terminal	Control Front	Rotary Volume:Tint(NTSC System only) Brightness, Contrast, Color, Volume(Speaker) Push Button : Power On/Off
	Jacks Rear	MIC & Speaker : One-Way Audio 5 BNC:Video Input/output 4 Audio RCA : Input/output

Design and specifications are subject to change without notice.