

SAMSUNG

# To be Security Professional 32"/40" LCD Monitor



40"/32" TFT-LCD Monitor

## SMT-4023/3223

- Super high resolution 600TV lines
- High contrast ratio 3000 : 1 (SMT-4023)  
High contrast ratio 3500 : 1 (SMT-3223)
- Fast response time 8ms
- HDMI, DVI, RGB and composite inputs
- Built-in Speaker

# 40"/32" TFT-LCD Monitor

# SMT-4023/3223




## Specifications

		SMT-4023	SMT-3223
<b>DISPLAY</b>			
Screen Size		40"	32"
Max. Resolution		1,920x1,080	1,366 x 768
Brightness		450cd/m <sup>2</sup>	
Contrast Ratio		3000 : 1	3,500 : 1
Aspect Ratio		16 : 9	
Viewing Angle (H/V)		178° / 178°	
Display Color		16.7million	
Response Time		8ms (G to G)	
Video System		NTSC / PAL	
Panel Life		50,000hours	
Filter Type		3D combfilter	
<b>INTERFACE</b>			
Video	Connector	CVBS, HDMI 1, HDMI 2, Component (D-sub 15pin)	
	Connector	Analog D-sub, DVI-D, Display port	
	Input Signal	0.7 Vp-p ±5%	
RGB / DVI	Available Format	640 x 350 @ 70Hz, 720 x 400 @ 70Hz	
		640 x 480 @ 60/72/75Hz (VGA)	
		800 x 600 @ 56/60/72/75Hz (SVGA)	
		1,024 x 768 @ 60 Hz/70/75Hz (XGA)	
		1,152 x 864 @ 75Hz, 1,152 x 870 @ 75 Hz	
HDMI	Available Format	1,280 x 960 @ 60Hz, 1,280 x 1,024 @ 60/75Hz (SXGA)	
		1,360 x 768 @ 60Hz, 1,366 x 768 @ 60Hz (SMT-3223)	
		1,600 x 1,200 @ 60Hz (SMT-4023), 1,920 x 1,080 @ 60Hz (SMT-4023)	
		HDMI 1, HDMI 2	
Audio	Connector	RCA (L/R), Stereo mini jack	
	Output Signal	Loop-through line level (PC only), Speakers : 2 x 5W	
Application Support Remote controller			
<b>ON SCREEN DISPLAY</b>			
Functions VESA™ DPM compatible			
Language English, Spanish, French, German, Italian, Portuguese, Russian, Swedish, Turkey, Taiwanese, Chinese, Japanese, Korean			
<b>GENERAL</b>			
Electrical	Input Voltage	100 ~ 240V AC (50/60Hz)	
	Power Consumption	Type 150W	
Environmental	Operating Temperature	0 ~ +40°C (+32°F ~ +104°F)	
	Operating Humidity	10% ~ 80% (Non-condensing)	
	Dimensions with Stand (WxHxD)	971.0 x 641.5 x 311.0 mm (38.23" X 25.26" X 12.24")	780.0 x 552.0 x 311.0 mm (30.71" X 21.73" X 12.24")
Mechanical	Dimensions without Stand (WxHxD)	971.0 x 582.0 x 119.0 mm (38.23" x 22.91" x 4.69")	780.0 x 482.0 x 109.5 mm (30.71" X 18.98" X 4.31")
	Weight	19.3 Kg (42.5 lb)	13.7 Kg (30.2 lb)
	Cabinet Color	Black	
	Rack Mounts	Optional	
	VESA Mounts Interface	400 x 600mm	200 x 200mm
Accessory (optional)		SBM-400ST	SBM-320ST

## Dimensions

Unit : mm (inch)

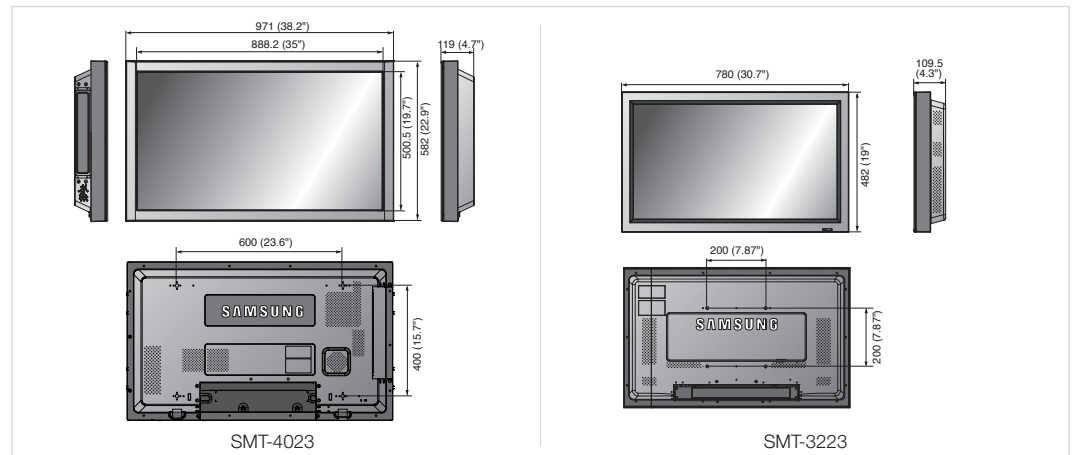

Design and specifications are subject to change without notice.



The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.



**SAMSUNG TECHWIN CO., LTD.**  
701, Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do Korea 463-400  
Tel : +82-70-7147-8741~8749, 8752~8760 Fax : +82-31-8018-3745  
www.samsungsecurity.com www.samsungcctv.com

**SAMSUNG TECHWIN AMERICA INC.**  
100 Challenger Rd, Suite 700 Ridgeland Park, NJ 07660  
Toll Free : +1-877-213-1222 Direct : +1-201-325-6920  
Fax : +1-201-373-0124  
www.samsungcctvusa.com

**SAMSUNG TECHWIN EUROPE LTD.**  
Samsung House, 1000 Hillwood Drive, Hillwood Business Park  
Chertsey, Surrey, UNITED KINGDOM KT16 0PS  
Tel : +44-1932-45-5300 Fax : +44-1932-45-5325

**TIANJIN SAMSUNG TECHWIN OPTO-ELECTRONICS CO., LTD.**  
No.11 Wei 6 Street, Micro-Electronic Industrial Park  
Jingang Road, Tianjin, P.R. CHINA 300385  
Tel : +86-22-23887788 Fax : +86-22-23887788

DISTRIBUTED BY

