

Network Monitoring in the Darkness

1.3 Megapixel IR Network Bullet Camera



1.3 Megapixel HD Weatherproof Network IR Bullet Camera

SNO-5080R

The SNO-5080R is a high performance 1.3 megapixel IP camera capable of displaying multiple resolutions from CIF (320 x 240) through 16:9 format 720p High Definition, to full 1.3 megapixel (1280 x 1024). It comes complete with high performance IR LEDs that allow it to illuminate objects up to 100 ft. away. It also includes a multi-stream H.264/ MPEG-4/ MJPEG codec. This camera features a 3.6x (2.8-10mm) varifocal auto iris lens, a minimum illumination specification of 0.3 Lux color (without the LEDs), True Day / Night operation with ICR, and is powered via either PoE or 24 VAC. Maximum frame rate is 22 fps @ 1280 x 1024; 30fps @ 720P. In addition, it is IP66-rated for indoor or outdoor applications and equipped with a mounting bracket for wall, surface or ceiling mount installation.

- Max. 1.3M (1280 x 1024) resolution
- Supports 16:9 HD (720p)
- 100ft of monitoring range in 0 Lux
- Built-in 2.8~10mm (3.6x) Vari-focal mega lens
- H.264 / MPEG-4 / MJPEG multiple codecs
- PoE, IP66


1.3Megapixel HD Weatherproof Network IR Camera

SNO-5080R



Dimensions

Unit : mm (inch)

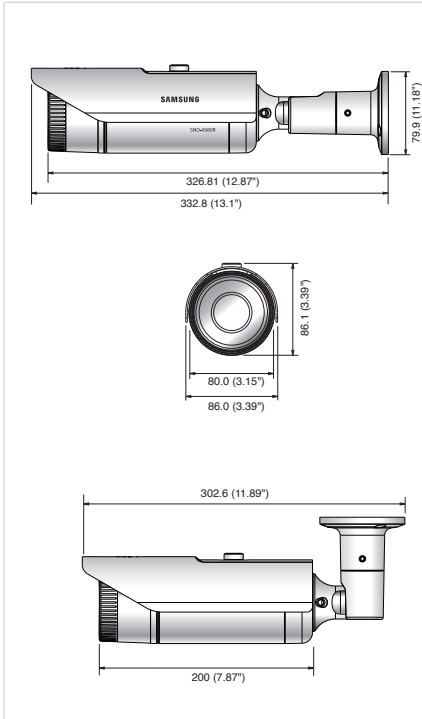

Specifications

SNO-5080RN/P

VIDEO	
Imaging Device	1/3" 1.3M PS CMOS
Total Pixels	1,384(H) x 1,076(V)
Effective Pixels	1,329(H) x 1,049(V)
Scanning System	Progressive
Min. Illumination	Color : 0.3Lux (F1.2, 50IRE), 0.005Lux (Sens-up 60x) B/W : 0Lux (F1.2, 50IRE, IR LED on)
S / N Ratio	50dB
Video Output	DIP connector type, 704 x 480(N), 704 x 576(P), for installation
LENS	
Focal Length (Zoom Ratio)	2.8 ~ 10mm (3.6x) Vari-focal
Max. Aperture Ratio	F1.2
Angular Field of View	H : 94.6°(Wide) ~ 28.8°(Tele), V : 68.4°(Wide) ~ 21.6°(Tele)
Focus Control	Manual
Lens Type	DC auto iris
Mount Type	Board-in type
OPERATIONAL	
IR LED	31ea
Viewable Length	100ft
Camera Title	Off / On (Displayed up to 15 characters)
Day & Night	Auto (ICR) / Color / B/W
Backlight Compensation	Off / BLC / HLC
Contrast Enhancement	SSDR (Samsung Super Dynamic Range) (Off / On)
Digital Noise Reduction	SSNR3 (2D+3D noise filter) (Off / On)
Motion Detection	Off / On (4 programmable zones)
Privacy Masking	Off / On (12 programmable zones)
Sens-up (Frame Integration)	Off / Auto (2x ~ 60x)
Gain Control	Off / Low / Medium / High / Manual
White Balance	ATW / AWC / Manual / Indoor / Outdoor
Electronic Shutter Speed	Auto / A.FLK / Manual (1/30 ~ 30,000sec)
Flip / Mirror	Off / On
Intelligent Video Analytics	Scene change, Virtual line, Enter / Exit, Appear / Disappear
Alarm I/O	Input 1ea / Output 1ea (Relay)
NETWORK	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.264, MPEG-4, MJPEG
Resolution	1280 x 1024, 1280 x 720P (HD), 1024 x 768, 800 x 600, 640 x 480, 320 x 240
Max. Framerate	22fps (1280 x 1024), 30fps (720P HD)
Video Quality Adjustment	H.264, MPEG-4 : Compression level, Target bitrate level control MJPEG : Quality level control
Bitrate Control Method	H.264, MPEG-4 : CBR or VBR, MJPEG : VBR
Streaming Capability	Multiple streaming (Up to 10 profiles)
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTSP, NTP, HTTP, HTTPS, SSL, DHCP, PPPoE FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, ONVIF
Security	HTTPS(SSL) login authentication, Digest login authentication IP address filtering, User access log
Streaming Method	Unicast / Multicast
Max. User Access	10 users at unicast mode
ONVIF Conformance	Yes
Webpage Language	English, French, German, Spanish, Italian, Chinese, Korean, Russian, Japanese, Swedish, Danish, Portuguese, Turkish, Polish, Czech, Rumanian, Serbian, Dutch, Croatian, Hungarian, Greek
Web Viewer	Supported OS : Windows XP / VISTA / 7, MAC OS Supported Browser : Internet Explorer 6.0 or Higher, Firefox, Google Chrome, Apple Safari
Central Management Software	NET-i viewer
ENVIRONMENTAL	
Operating Temperature / Humidity	-10°C ~ +50°C (+14°F ~ +122°F) / up to 80% RH
Ingress Protection	IP66 Grade (Waterproof)
ELECTRICAL	
Input Voltage	12V DC, 24V AC, PoE (IEEE802.3af)
Power Consumption	Max. 11W
MECHANICAL	
Color / Material	Dark gray / Metal
Dimensions (WxHxD)	86.0 x 86.1 x 332.8mm (3.39" x 3.39" x 13.1")
Weight	1.3Kg (2.87 lb)



SAMSUNG TECHWIN AMERICA Inc.
100 Challenger Road, Suite 700, Ridgefield Park, NJ 07660, UNITED STATES
Tol Free : 1-877-213-1222 Fax : 1-201-373-0124
www.samsungsecurityusa.com



The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

Design and specifications are subject to change without notice.

■ DISTRIBUTED BY

