



DS-2CC52C2S-IRM HD720p IR Dome Camera

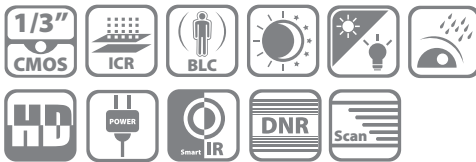

Key features

- HD720p video output
- True Day/Night
- Up to 20m IR Distance
- IP66 Weatherproof

Dimensions

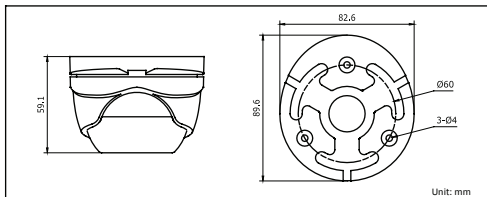

DS-2CC52C2S-IRM	
Camera	
Image Sensor	1/3" Progressive Scan CMOS
Effective Pixels	1280(H)*720(V)
Min. Illumination	0.01 Lux @(F1.2,AGC ON), 0 Lux with IR
Shutter Time	1/100 s to 1/100,000 s
Lens	3.6mm (2.8mm, 6mm optional)
	Angle of View: 78.8°(3.6mm), 103°(2.8mm), 51.2°(6mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	720p@25fps/720p@30fps
HD Video Output	SMPTE292M (HD-SDI)
General	
Working Temperature/Humidity	-10 °C - 60 °C (14 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12V DC±10%
Power Consumption	Max. 3W
Weather Proof Ratings	IP66
IR Range	20 meters
Dimension	89.6 × 59.1 mm (3.53" × 2.33")
Weight	400 g (0.88 lb)

Accessories



DS-1272ZJ-110-TRS
Indoor/outdoor wall mount

Available models

DS-2CC52C2S-IRM