

DS-2CC52C2S-IT3P HD720p EXIR Dome Camera




EXIR



Key features

- HD720p video output
- True Day/Night
- Up to 40m IR Distance with EXIR technology
- IP66 Weatherproof

Dimensions

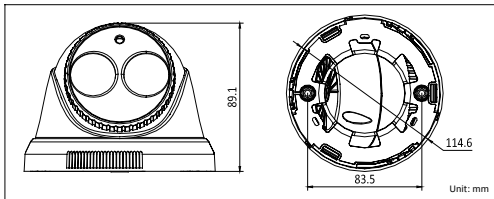

DS-2CC52C2S-IT3P	
Camera	
Image Sensor	1/3" Progressive Scan CMOS
Effective Pixels	1280(H)*720(V)
Min. Illumination	0.01 Lux @(F1.2,AGC ON), 0 Lux with IR
Shutter Time	1/100 s to 1/100,000 s
Lens	3.6mm (2.8mm, 6mm, 8mm, 12mm, 16mm optional)
	Angle of View: 78.8°(3.6mm), 103°(2.8mm), 51.2°(6mm), 37.6°(8mm), 24.6°(12mm), 18.8°(16mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	720p@25fps/720p@30fps
HD Video Output	SMPTE292M (HD-SDI)
General	
Working Temperature/Humidity	-10 °C - 60 °C (14 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12V DC±10%
Power Consumption	Max. 6W
Weather Proof Ratings	IP66
IR Range	40 meters
Dimension	Φ114.6 × 89.1mm(Φ4.5" × 3.5")
Weight	250 g (0.55lb)

Accessories



DS-127ZJ-110
Indoor/outdoor wall mount

DS-1258ZJ
Indoor wall mount

Available models

DS-2CC52C2S-IT3P