


## DS-2DM1-614X/DS-2DM1-604X 23x IP Speed Dome Indoor/Outdoor

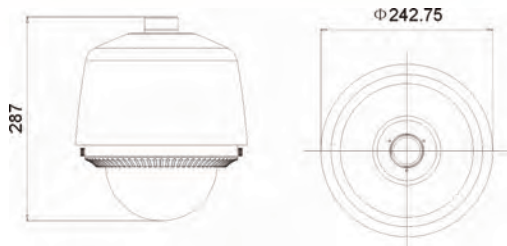

### Specifications

#### Camera

Image Sensor	1/4" Interline Transfer CCD
Effective Pixels	PAL: 752 (H)×582 (V) NTSC: 768 (H)×494 (V)
Horizontal Resolution	540 TVL (Color) 570 TVL (B/W)
Signal System	NTSC / PAL
Min. Illumination	0.7Lux / F1.4 (Color) 0.01Lux / F1.4 (B/W)
White Balance	Auto / ATW / Indoor / Outdoor
AGC	Auto / Manual (On/Off)
S/N Ratio	50dB
BLC	On / Off
Electronic Shutter Speed	N: 1/60s to 1/120,000s P: 1/50s to 1/120,000s
Day & Night	Auto IR Cut Filter (On/Off)
Private Mask	Up to 4
Digital Zoom	10X
Auto Focus	Auto / Manual

#### Lens

Zoom Ratio	23X (3.84-88.4 mm)
Zoom Speed	5.4s (Optical , WIDE-TELE)
Field of View	2.36° to 52.2° (WIDE-TELE)
Min. Working Distance	1200 mm (TELE)
Aperture Range	F1.6-F3.2

#### Network

Ethernet Interface	10Base-T / 100Base-TX, RJ45
Image Resolution	PAL: 704×576 Pixels NTSC: 704×480 Pixels
Video Compression	H.264
Audio Compression	OggVorbis /16kbps
Audio Mode	Off / Audio Input / Audio Output
Protocol Support	TCP/IP, HTTP, DHCP, DNS, RTP/RTCP, PPPoE
Simultaneous Users	Up to 6
Dual Stream	Yes
Mini SD Memory Card	High Speed Mini SD Card: 512M, 1G, 2G
Access Protection	3 Levels
User Authentication	Host, ID and Password

#### Pan & Tilt

Pan Range	360° Endless Rotation
Pan Speed	0.2°/s to 75°/s (Proportional Zoom Ratio)
Tilt Range	0°~90°
Tilt Speed	0.2°/s to 50°/s (Proportional Zoom Ratio)
Preset Points	200
Tour Mode	Off / Preset (w/Freeze Frame) / Patrol (Up to 8) / Pattern (Up to 4) / Auto Scan / Random Scan / Frame Scan
Restore/Reboot	Previous State
PTZ Position Display	On / Off

#### Client GUI

Camera Control	Pan/Tilt, Zoom, Focus, Click Centering, Drag Zoom, Iris, Preset Position Recall and Program, Auto mode
Camera Title	On/Off (Up to 18 Characters)
Menu Language	English, Chinese
Clock Display	Time:Week:Date (6 Formats on Client Software)

#### Alarm

Alarm I/O	1 Input / 1 Output (Priority Link)
Alarm Trigger	Preset, Patrol, Auto Scan, Client Notification

#### Input/Output

Monitor Output	1.0V[p-p] / 75Ω, NTSC (or PAL) Composite, BNC
Microphone Input	2-2.4V[p-p], Input Impedance: 1KΩ ±10%
Audio Output	Line Level

#### General

Menu Language	English, Chinese
RS-485 Protocols	HIKVISION, PELCO-P/D (Auto Format)
Power Supply	24VAC, 40VA
Power Consumption	12W (50W Heater On)
Operating Temperature	-30°C ~ 60°C (outdoor)
Humidity	Up to 90%
Housing	IP66 Standard (outdoor)
Lightning Protection	TVS 3000V Limited
Dimensions	6", Φ242.75 (mm)×287 (mm)
Weight (approx.)	5 kg