


## DS-6001DI Decoder Server

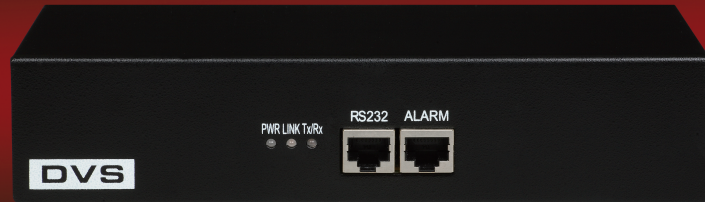

### Key Features

- High performance DSP hardware compression
- H.264 real-time video compression
- Up to 4CIF decoding output
- Support variable bit rate and frame rate

### Specifications

#### Video/Audio Input

Video Compression	H.264
Intercom	1 RCA linear input, 600Ω

#### External Interface

Communication Interface	1 RJ45 10M/100M UTP Network Port, 1 RJ45 RS-232 Port, 1 RJ45 RS-485 Port, 1 RJ45 for Alarm Input and Output
Alarm Input	2 (Terminal Block)
Alarm Output	2 (Terminal Block)

#### Video/Audio Output

Decode Resolution	4CIF/DCIF/2CIF/CIF/QCIF
Video Output	1 BNC (1.0Vp-p, 75Ω)
Frame Rate	4CIF: 25(P)/30(N) fps
Bit Rate	32kbps ~ 8Mbps
Audio Output	1 RCA output

#### General

Power Supply	12VDC
Power Consumption	≤7W
Operating Temperature	-10°C ~ 55°C
Humidity	10%~90%
Size	235mm(D)x136mm(W) x43mm(H)
Weight	≤2Kg

### System Configuration

