


DS-6101HFI-SATA Digital Video Server

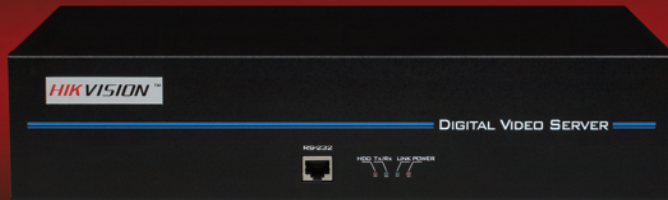

Key Features

- High performance DSP hardware compression
- H.264 video compression
- Dual streams
- Support variable bit rate and frame rate
- Multi-zone motion detection and private masking
- Multi-level user access management

Specifications

Video/Audio Input

Video Compression	H.264
Video Input	1
Video Input Interface	BNC (1.0Vp-p, 75Ω), Support PAL and NTSC
Audio Compression	OggVorbis, 16Kbps
Audio Input	1
Audio Input Interface	BNC (2Vp-p, 1kΩ)
Intercom	1 Ch, RCA (2Vp-p, 1kΩ)

External Interface

Communication Interface	1 RJ45 10M/100M Ethernet Port 1 RS232 Interface (RJ45) 1 RS485 interface (RJ45)
SATA Interface	1 (w/ 1 Built-in SATA HDD Up to 2000GB)
Alarm Input	4 (Terminal Block)
Alarm Output	2 (Terminal Block)

Video/Audio Output

Encode/Decode Resolution	4CIF/DCIF/2CIF/CIF/QCIF
Frame Rate	4CIF: 25(P)/30(N) fps
Dual Stream	Yes
Bit Rate	32Kbps ~ 8Mbps
Audio Output	1 Ch, RCA(Linear Electrical Level, 600Ω)

General

Power Supply	100 ~ 240VAC, 6.3A, 50~60Hz
Power Consumption	20 ~ 30W (w/o HDD)
Operating Temperature	-10°C ~ 55°C
Humidity	10%~90%
Size	78mm(D)x350mm(W) x225mm(H)
Weight	≤3.5Kg

System Configuration

