



DS-6301/6304/6308DI Decoder Server



Key Features

- High performance hardware decoding
- Compatible with standard H.264, MPEG4 and Hikvision DVR/DVS/Network Cameras
- Up to 720p resolution decoding
- VGA and composite output simultaneously
- Support variable bit rate and frame rate
- Support dynamic and cycle decoding
- Support DHCP and DDNS

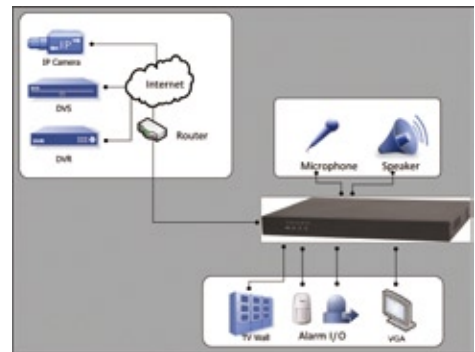

Specifications

		DS-6301DI	DS-6304DI	DS-6308DI
Video/Audio input	Voice talk input	1-ch, BNC(2.0Vp-p, 1kΩ)	1-ch, BNC(2.0Vp-p, 1kΩ)	1-ch, BNC(2.0Vp-p, 1kΩ)
	Decode resolution	QCIF/CIF/2CIF/DCIF/4CIF/720P	QCIF/CIF/2CIF/DCIF/4CIF/720P	QCIF/CIF/2CIF/DCIF/4CIF/720P
Video/Audio output	Video output	1-ch, BNC (1.0Vp-p, 75Ω)	4-ch, BNC (1.0Vp-p, 75Ω)	8-ch, BNC (1.0Vp-p, 75Ω)
	Frame rate	720P: 25fps(P)/30fps(N)	720P: 25fps(P)/30fps(N)	720P: 25fps(P)/30fps(N)
	Stream type	Video/Video&Audio	Video/Video&Audio	Video/Video&Audio
	Audio output	1-ch, BNC (Linear, 600Ω)	4-ch, BNC (Linear, 600Ω)	8-ch, BNC (Linear, 600Ω)
	Voice talk output	1-ch, BNC (Linear, 600Ω)	1-ch, BNC (Linear, 600Ω)	1-ch, BNC (Linear, 600Ω)
	Communication interface	1 RJ45 10M/100M/1000M adaptive Ethernet interface 1 RS232 port, 1 RS485 port	1 RJ45 10M/100M/1000M adaptive Ethernet interface 1 RS232 port, 1 RS485 port	1 RJ45 10M/100M/1000M adaptive Ethernet interface 1 RS232 port, 1 RS485 port
External interface	VGA interface	1-ch, Resolution: 1280×1024×60Hz, 1280×720×60Hz, 1024×768×60Hz	2-ch, Resolution: 1280×1024×60Hz, 1280×720×60Hz, 1024×768×60Hz	4-ch, Resolution: 1280×1024×60Hz, 1280×720×60Hz, 1024×768×60Hz
	Alarm input	8-ch	8-ch	8-ch
	Alarm output	8-ch	8-ch	8-ch
General	Consumption	≤40W	≤40W	≤40W
	Working humidity	10%~90%	10%~90%	10%~90%
	Dimension	440(W)×44.5(H)×320mm(D) (17.34"(W)×1.75"(H) ×12.61"(D))	440(W)×44.5(H)×320mm(D) (17.34"(W)×1.75"(H) ×12.61"(D))	440(W)×44.5(H)×320mm(D) (17.34"(W)×1.75"(H) ×12.61"(D))
	Weight(without HDD)	≤5000g(11.02lbs)	≤5000g(11.02lbs)	≤5000g(11.02lbs)