

DS-D4229FO-CLFS P2.9 Outdoor Fixel LED Display Unit



- Support front and rear maintenance
- Using aluminum chassis with good heat dissipation, workable under 60 °C
- All series aluminum profile cabinets support IP67(F)/IP66(R)
- Apply unique technology, maximally saving 30% energy
- Various cabinet sizes, applying to diverse scenes
- The cabinets support customized 45° corner cut to realize 90° right-angle splicing


▪ Specification

Model		DS-D4229FO-CLFS
Cabinet	Pixel Configuration	1R1G1B
	Pixel Pitch Category	P2.97
	Pixel Pitch	2.97 mm
	Modules Component	Aluminum Shell
	Dimensions (W × H × D)	500 mm × 500 mm × 97 mm (19.7" × 19.7" × 3.82")
	Resolution	168 × 168
	Area	0.25
	Weight	9.5 KG/PCS
	Pixel Density	112896 dots/m ²
	Lamp Board Housing	YES
	Cabinet Material	Aluminum Profile
	Maintenance Method	Front/Back Maintenance
	Cabinet Flatness	0.8 mm
	Protection Level	IP67(F)/IP66(R)
Display	White Balance Brightness	4500
	Color Temperature	3000 K to 10000 K
	Viewing Angle	160° (H)/80° (V)
	Contrast Ratio	5000:1
	Color Uniformity	≥ 95%
	Brightness Uniformity	≥ 95%
Processing Performance	Driving Method	Constant Current
	Frame Frequency	50/60 HZ
	Refresh Rate	3840
	Grey Level	14 bit
	Display Color	DCI-P3 > 85%
Power	Power Supply	110 to 220
	Max. Consumption	560
	Average Consumption	180
Working Environment	Working Temperature	-40 to 60 °C
	Working Humidity	10% to 95% RH (non-condensing)
	Storage Humidity	10% to 95% RH (non-condensing)
	Storage Temperature	-40 to 60 °C
General	Gross Weight	75 kg
	Package Dimensions (W × H × D)	730 (W) mm × 580 (H) mm × 670 (D) mm (28.74" × 22.83" × 26.37")
	Lifespan	100000 Hours

▪ Available Model

DS-D4229FO-CLFS

▪ Dimension

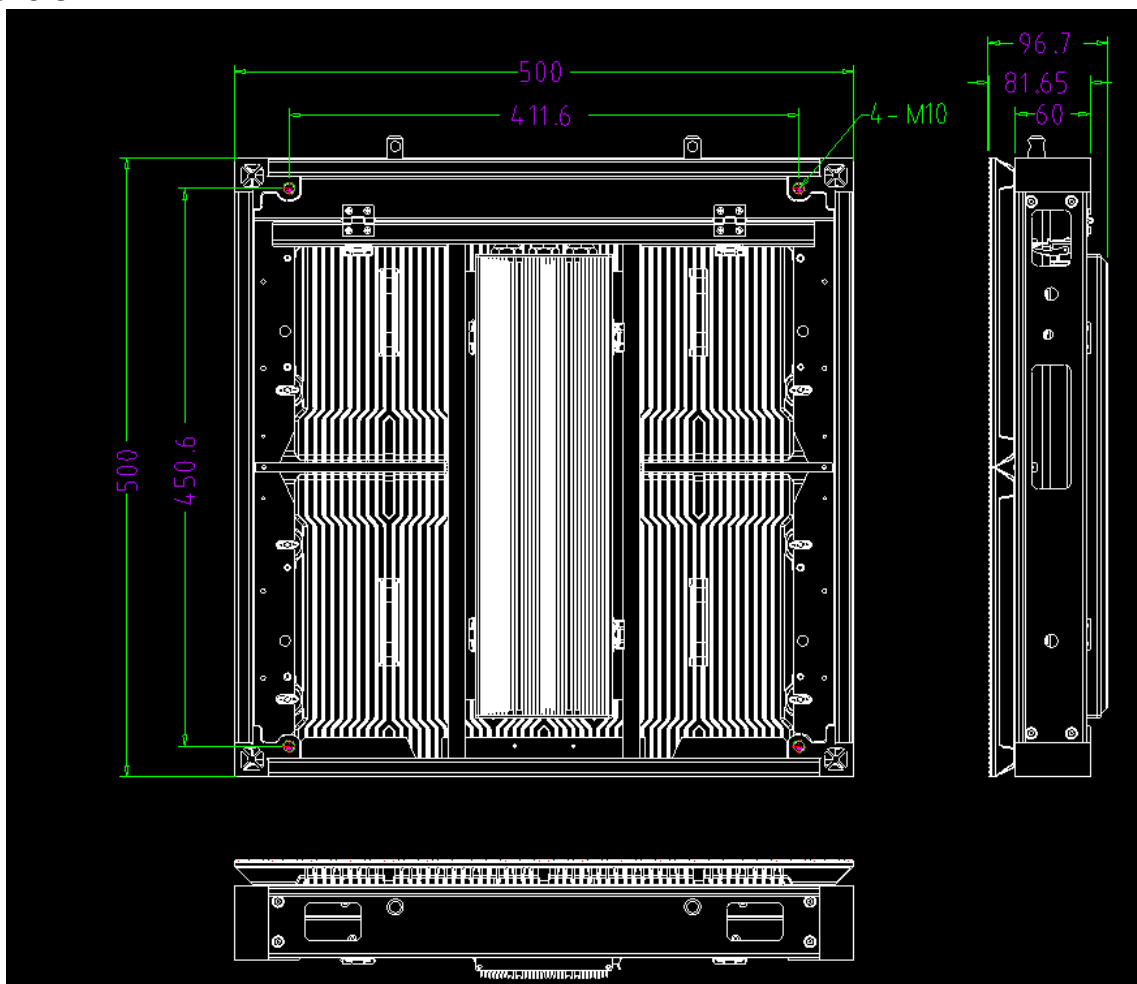

Unit: mm

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

