

DS-D5032FL 32" LED Monitor

Overview

DS-D5032FL is a reliable surveillance display with LED backlit technology, excellent color reduction and image processing, truly display the video details. Multiply interfaces are able to meet various surveillance environments, and build-in speaker is convenient to audio play. DS-D5032FL is an ideal choice for security and surveillance application.




key Features

- LED backlit technology with full HD 1920×1080
- Wide view angle: 178°(H)/178°(V)
- Image processing: 3D comb filter, 3D De-interlace, 3D noise reduction, Skin correction
- Multiply inputs: HDMI, VGA, DVI, BNC, USB, audio in
- Build-in speaker
- Image freeze
- High reliable components for 7×24 working
- VESA stand bracket

Model:

DS-D5032FL

Dimension:

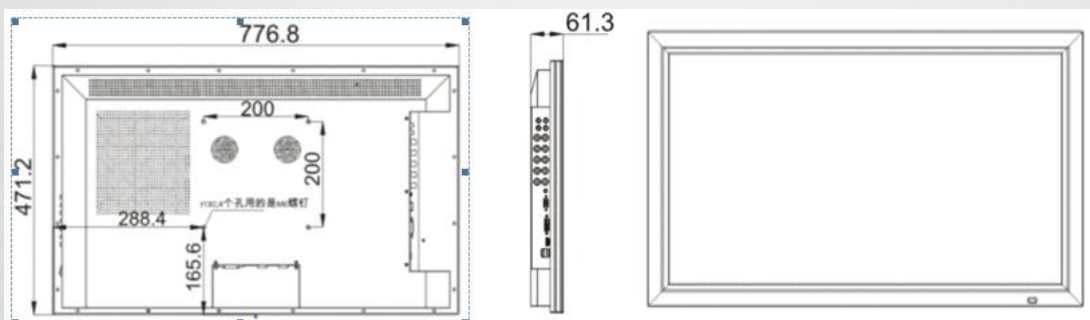

DS-D5032FL 32" LED Monitor



Model	DS-D5032FL
Display	
Display Type	LED-Backlit TFT LCD
Screen Size	32"
Pixel Pitch(H×V)	0.3637mm×0.3637mm
Max Resolution	1920×1080
Brightness	400cd/m2 (Typical)
Contrast	4000:1
Response Time	6.5ms
Color	16.7M
Viewing Angle	Horizontal 178°, Vertical 178°
Input	
HDMI	HDMI×1
VGA	VGA×1
DVI	DVI×1
BNC	BNC×1
USB	USB×1
Audio	
Audio Input	1, 3.5 mm mini-jack
Audio Out	1, 3.5 mm mini-jack
Speaker	3W ×2
Mounting	
VESA	200mm × 200mm
General	
Power Supply	AC100 ~ 220V, 50 / 60Hz
Consumption	< 70W(on) < 1W(Standby)
Operation Temperature	0°C ~ 40 °C
Operating Humidity	10%-85% (No Condensation)
Storage Temperature	-20°C ~ 55°C
Storage Humidity	5%-95% (No Condensation)
Dimension (W×H×D)	737.4mm×452.5mm×70.65mm (29.03" × 17.81" × 2.78")
Weight	19Kg(Gross weight)