

DS-KD8002-VM Video Intercom Metal Door Station

Key Features

Basic Functions

- Video intercom function
- Access control function
- Issues cards via door station, up to Max. 2500 cards, via outer door station, up to 50000 (This function will be invalid if the card has been issued via the client.)
- Card readers supported
- Self-adaptive visible light supplement

Video/Audio Functions

- HD video surveillance with high performance CMOS
- Noise suppression and echo cancellation
- H.264 video compression
- Low illumination

Remote Control

- Remote unlocking via the client or the app
- Remotely answering the call via the client or the app

Alarm Functions


- Tampering alarm and door magnetic alarm supported
- Auto-uploads alarm messages to master station or the client once the duress code is entered to open the door

Additional Features

- Message notification function
- Auto-uploads captured pictures to FTP or the client




Typical Application

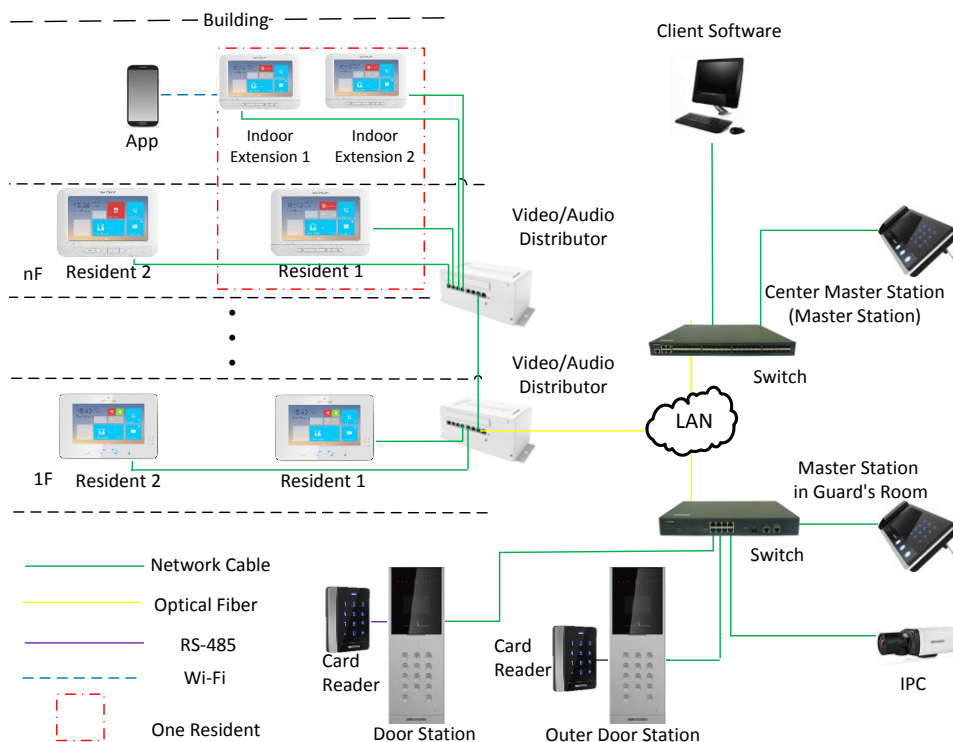

Specifications

| Model | DS-KD8002-VM | |
|---------------------------|--|---|
| System parameters | Processor | High-Performance Embedded SOC Processor |
| | Operation system | Embedded Linux Operation System |
| Video parameters | Camera | CMOS Low Illumination 1.3 MP HD Colorful Camera |
| | Video compression standard | H.264 |
| | Resolution | 1280 × 720 |
| | Video frame rate | PAL: 25 fps, NTSC: 30 fps |
| Display parameters | Display screen | 3.5-Inch Colorful TFT LCD |
| | Display resolution | 480 × 320 |
| | Operation method | Physical Keypad |
| | Operation interface | LCD Display, Easy Menu |
| Audio parameters | Audio input | Built-in Omnidirectional Microphone |
| | Audio output | Built-in Loudspeaker |
| | Audio compression standard | G.711 U |
| | Audio compression rate | 64 Kbps |
| | Audio quality | Noise Suppression and Echo Cancellation |
| Access control parameters | Internal card reader | Built-in IC Card Reader |
| | External card reader | Wiegand 26, Wiegand 34, or RS-485 IC Reader |
| | Door magnetic detection | Detects Door Magnetic Status |
| Light supplement | Light supplement mode | Visible Light Supplement |
| Network parameters | Ethernet | 10/100/1000 Mbps Self-Adaptive Ethernet |
| | Network protocol | TCP/IP, RTSP |
| Alarm parameters | Alarm input | Door Magnetic Alarm, Tampering Alarm |
| Device interfaces | Network interface | 1 RJ-45 10/100/1000 Mbps Self-Adaptive Ethernet Interface |
| | RS-485 | 1 RS-485 Half-Duplex Port |
| | I/O input | 8 |
| | I/O output | 4 |
| | Wiegand | 1 Wiegand Port for Accessing Wiegand IC Card Reader |
| | USB | 1 USB 2.0, Supporting U-Disk |
| General | Material | Aluminum Alloy |
| | Power supply | 12 VDC |
| | Power consumption | ≤15 W |
| | Working temperature | -40° C to +70° C (-40° F to 158° F) |
| | Working humidity | 10% to 90% |
| | IP protection level | IP65 |
| | Dimensions (L × W × H) | 418 mm × 145 mm × 61 mm (16.5" × 5.7" × 2.4") |
| Certification | FCC, IC, CE, C-TICK, ROHS, REACH, WEEE | |

Appearance and Interfaces

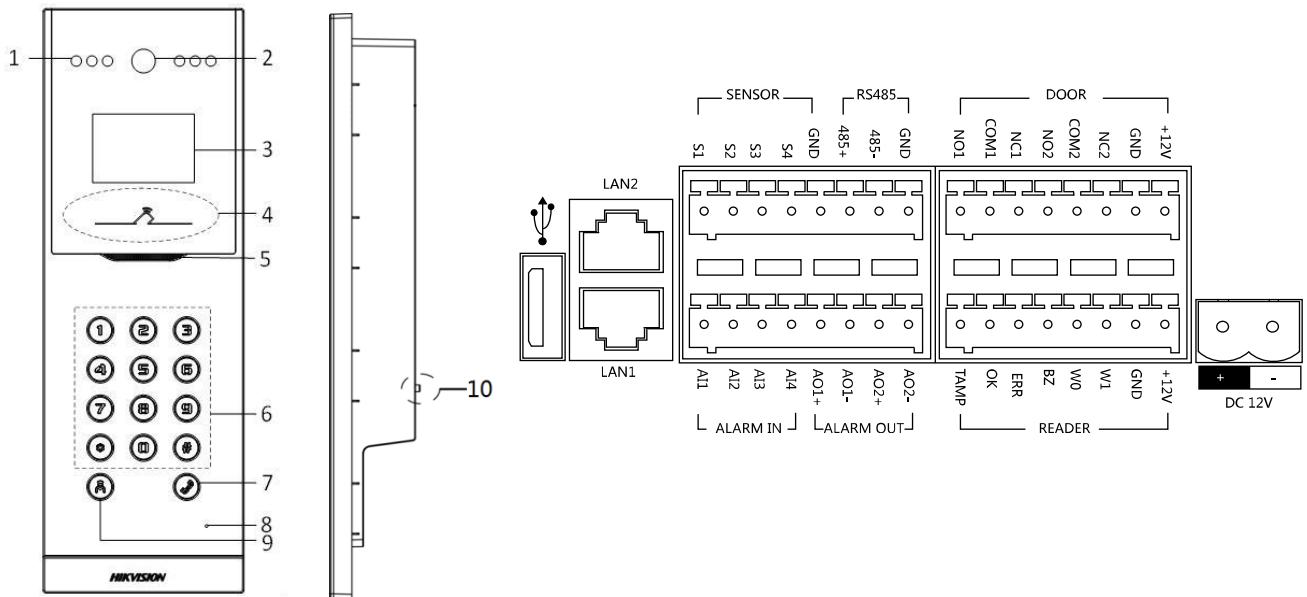

| Index | Description | Index | Description |
|-------|-----------------------------------|-------|-----------------|
| 1 | Low Illumination Supplement Light | 6 | Numeric Keypad |
| 2 | Built-in Camera | 7 | Call Button |
| 3 | LCD Display Screen | 8 | Microphone |
| 4 | Card Induction Area | 9 | Call Center Key |
| 5 | Loudspeaker | 10 | TAMPER |

Distributed by

Available Model

DS-KD8002-VM

HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Africa
T +27 (10) 0351172
sale.africa@hikvision.com

Hikvision Hong Kong
T +852-2151-1761