

## iDS-7600NXI-I2/8P/X DeepinMind Series NVR

### Key Feature

- H.265+/H.265/H.264+/H.264 video formats
- Intelligent analytics based on deep learning algorithm
- Up to 8-ch perimeter protection
- Up to 8-ch facial recognition
- Up to 4-ch video structuralization
- Up to 4-ch throwing objects from building
- Up to 8-ch IP cameras can be connected
- Up to 16-ch 1080p decoding capability



### Professional and Reliability

- H.265+ compression effectively reduces the storage space by up to 75%
- Dual-stream recording saves bandwidth
- Adopt stream over TLS encryption technology which provides more secure stream transmission service
- Support double verification for playback and downloading

### HD Video Output

- Provide independent HDMI and VGA outputs
- HDMI video output at up to 4K resolution

### Storage and Playback

- Up to 2 SATA interfaces for HDD connection
- Up to 8-ch synchronous playback

### Smart & POS Function

- Support multiple VCA (Video Content Analytics) events
- Configurable special camera smart functions, such as VCA detection (motion, line crossing, intrusion, etc.), heat map, ANPR (Automatic Number-Plate Recognition), and people counting
- POS information overlay on live view and playback, and POS triggered recording and alarm




## Network & Ethernet Access

- 8 independent PoE network interfaces
- 1 self-adaptive 10/100/1000 Mbps Ethernet interface
- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- Smooth streaming technology
- Support web access without plug-in

## Typical Application


### Facial Recognition and Face Picture Comparison

Modeling and analyzing face pictures captured by cameras. Realize list alarm and stranger alarm via face picture library. Search target people by picture and name features.

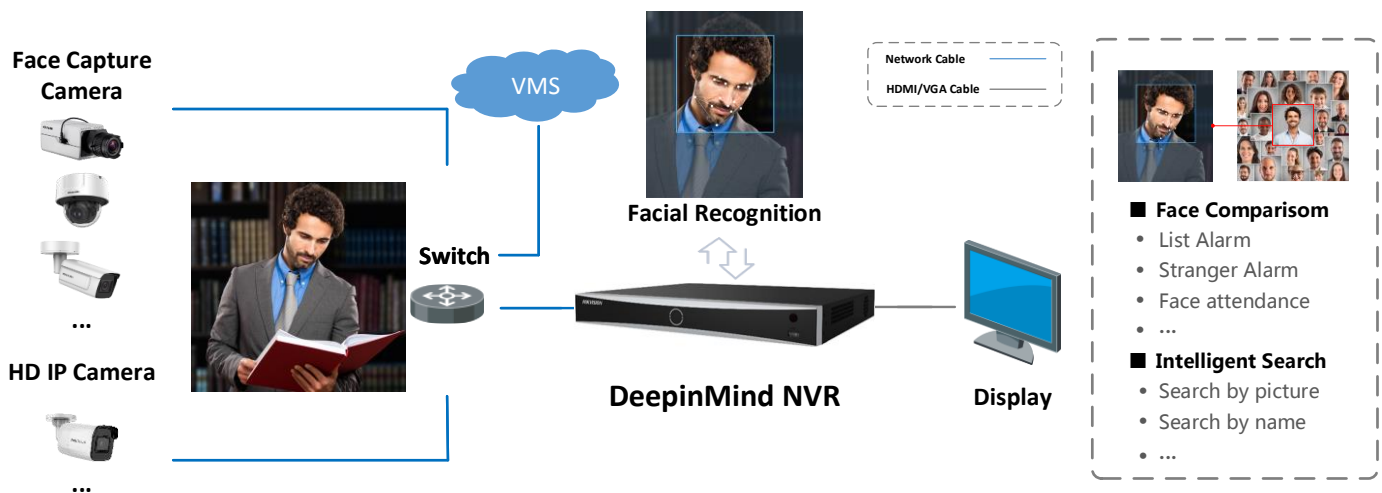


### Perimeter Protection

Adopt deep learning algorithm to reduce false alarm, effectively reduces the false alarm caused by tree branches, leaves, shadow, light, vehicles, small animals, etc.

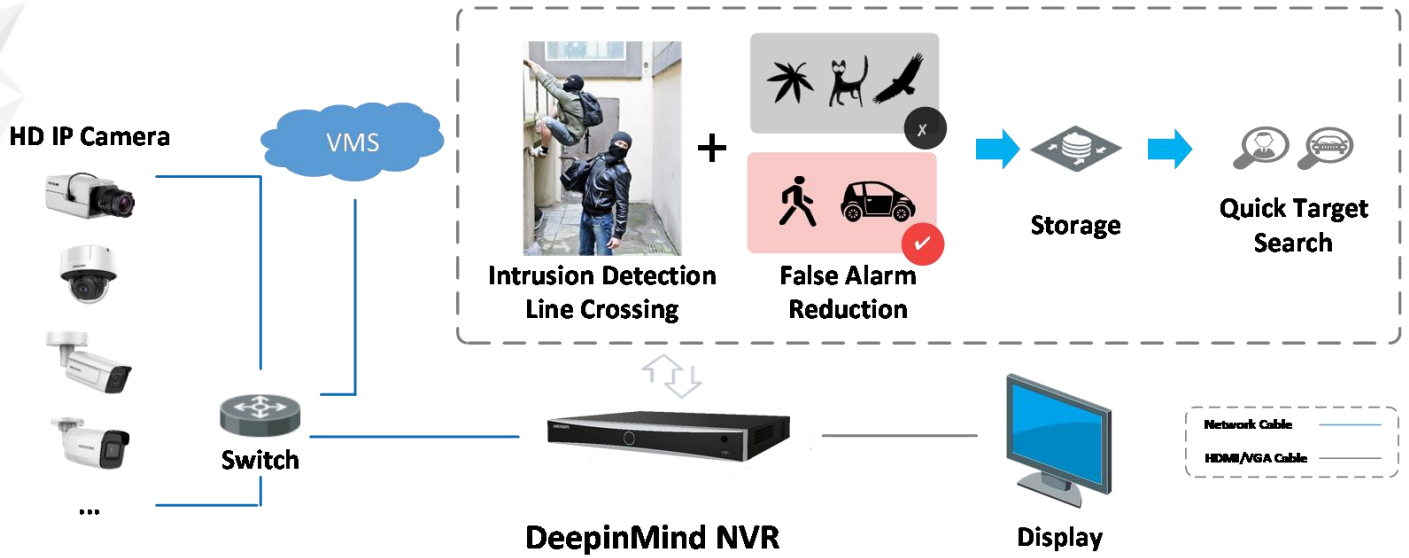

### Video Structuralization

Extracting the face picture, human body and vehicle features from live videos, which is used for the tracking and retrieval of human and vehicles.

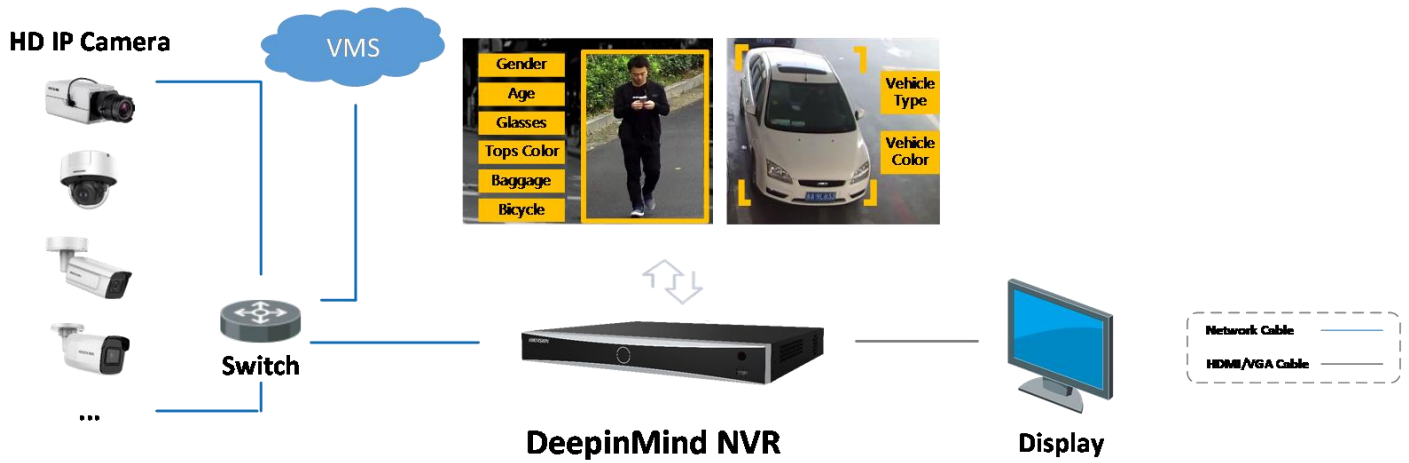


## Specification

<b>Model</b>	<b>iDS-7608NXI-I2/8P/X</b>
<b>Facial Recognition<sup>1</sup></b>	
<b>Facial detection and analytics</b>	Face picture comparison, human face capture, face picture search
<b>Face picture library</b>	Up to 16 face picture libraries, with up to 100,000 face pictures in total (each picture ≤ 4 MB, total capacity ≤ 20 GB)
<b>Face picture comparison</b>	8-ch face picture comparison alarm
<b>Performance of facial detection and analytics</b>	8-ch 4 MP human face capture (HD network camera, up to 8 MP, H.264/H.265)
<b>Perimeter Protection<sup>1</sup></b>	
<b>False alarm reduction</b>	Up to 8-ch 4 MP (HD network camera, up to 8 MP, H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm
<b>Video Structuralization<sup>1</sup></b>	
<b>Structured analysis</b>	Up to 4-ch 2 MP (HD network camera, up to 8 MP, H.264/H.265) live video structuralization analysis
<b>Face picture library</b>	Up to 16 face picture libraries, with up to 100,000 face pictures in total
<b>Face picture comparison</b>	8-ch face picture comparison alarm
<b>Throwing Objects from Building<sup>1</sup></b>	
<b>Capability</b>	Up to 4-ch 2 MP (H.264/H.265) video analysis
<b>Video and Audio</b>	
<b>IP video input</b>	8-ch Up to 12 MP resolution
<b>Incoming bandwidth</b>	320 Mbps
<b>Outgoing bandwidth</b>	256 Mbps
<b>HDMI output</b>	1-ch, 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
<b>VGA output</b>	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI/VGA independent output
<b>CVBS output</b>	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
<b>Audio output</b>	1-ch, RCA (Linear, 1 KΩ)
<b>Two-way audio input</b>	1-ch, RCA (2.0 Vp-p, 1 KΩ)
<b>Decoding</b>	
<b>Decoding format</b>	H.265+/H.265/H.264+/H.264/MPEG4
<b>Recording resolution</b>	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/DCIF/2CIF/CIF/QCIF
<b>Synchronous playback</b>	8-ch
<b>Capability</b>	16-ch@1080p (30 fps)
<b>Dual stream recording</b>	Support
<b>Stream type</b>	Video, Video & Audio
<b>Audio compression</b>	G.711ulaw/G.711alaw/G.722/G.726/MP2L2

Network	
Remote connection	128
Network protocol	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS
Network interface	1, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
PoE	
Interface	8, RJ-45 10/100 Mbps self-adaptive Ethernet interface
Power	≤ 200 W
Supported standard	IEEE 802.3 af/at
Auxiliary interface	
Serial port	N/A
SATA	2 SATA interfaces
Capacity	Up to 10 TB capacity for each disk
Alarm in/out	4/1
USB interface	Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0
General	
Power supply	100 to 240 VAC, 50 to 60 Hz
Consumption (without HDD and PoE off)	≤ 30 W
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10% to 90%
Dimension (W × D × H)	385 × 315 × 52 mm ( 15.2"× 12.4" × 2.0")
Weight (without HDD)	≤ 1 kg (2.2 lb)
Certification	
Obtained Certification	CE, FCC, UL, CB, WEEE, BIS, IC, RCM, KC, LOA
CE	EN50130-4, EN 61000-3-2, EN 61000-3-3, EN55032:2015
FCC	Part 15 Subpart B, ANSI C63.4-2014

1: Facial recognition, perimeter protection video structuralization and throwing objects from building cannot be enabled at the same time. Enable one function will make the others unavailable.


# Dimension

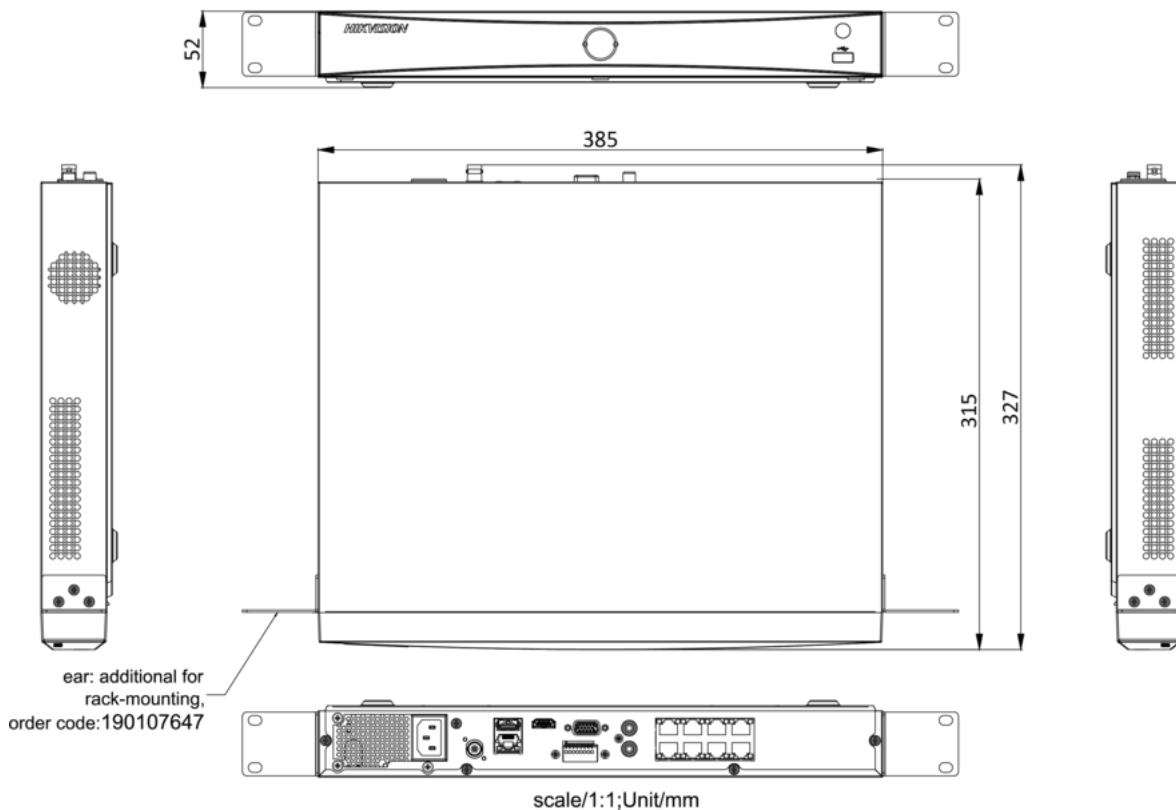

scale/1:1;Unit/mm

Unit: mm

## Physical Interface

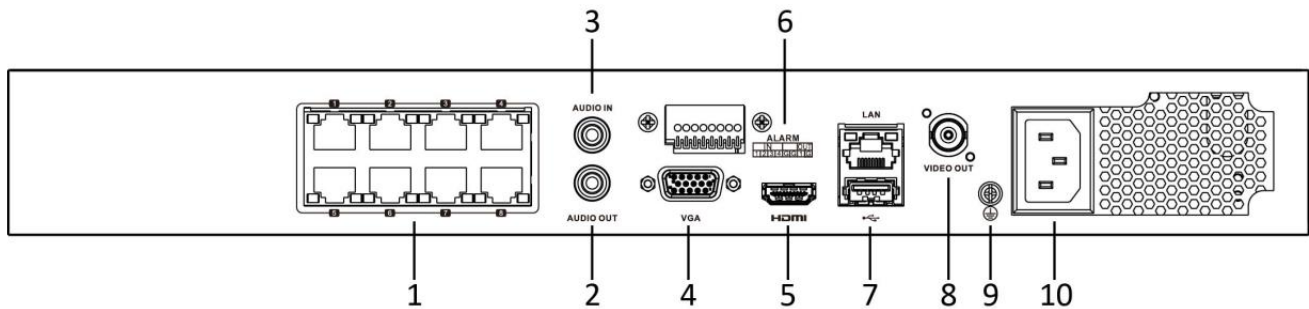

No.	Description	No.	Description
1	Network Interfaces with PoE Function	6	Alarm IN/OUT
2	AUDIO OUT	7	USB 3.0 Interface and Network Interface
3	AUDIO IN	8	VIDEO OUT
4	VGA Output (DB9 connector)	9	GND
5	HDMI Interface	10	100 to 240 VAC Power Supply

## Available Model

iDS-7608NXI-I2/8P/X

Distributed by



### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 [216]521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com