


## IP Module

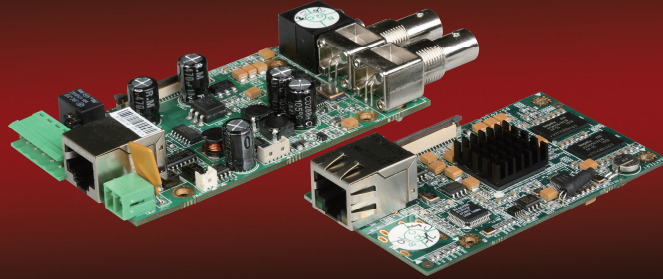

### Key Features

Hikvision IP module applies Embedded Linux OS and the latest TI DaVinci platform. The product can be embedded into analog camera and analog speed dome to build up network camera and network speed dome. With chassis, IP module can also be used as one channel network digital video server.

### Specifications

#### Video/Audio Input

Video Compression	H.264
Video Input	1
Video Input Interface	BNC, 1.0Vp-p, 75Ω
Audio Compression	OggVorbis, 16Kbps
Audio Input	1
Audio Input Interface	BNC 2.0Vp-p, 1kΩ
Intercom	1, RCA 2.0Vp-p, 1kΩ

#### External Interface

Network Interface	1 RJ45 10M/100M
RS-232 Port	1 RJ45 RS-232 Port
PTZ Port	Screw Terminal (T+, T-)
Alarm Input	1 (Terminal Block)
Relay Output	1 (Terminal Block)

#### Video/Audio Output

Encode/Decode Resolution	4CIF/DCIF/2CIF/CIF/QCIF
Frame Rate	4CIF: 25(P)/30(N) fps
Dual Stream	Yes
Bit Rate	32Kbps ~ 8Mbps
Audio Output	1, RCA Linear Electrical Level, 600Ω

#### General

Power Supply	12VDC
Power Consumption	≤3W
Operating Temperature	-10°C ~ 55°C
Humidity	10%~90%
Size	38mmx80mm (w/ Chassis: 53mmx94mm)
Weight	≤0.5Kg