

## HCC485LX

### HIGH RESOLUTION COLOUR CAMERA

The Honeywell HCC485LX colour camera is ideally suited for use in day-to-day surveillance applications. Designed for value, the HCC485LX saves time and money with easy installation and reliable performance. Its off-the-shelf feature set is developed for high-picture quality in standard applications and requires little to no adjustment once installed.

The HCC485LX supports direct-drive and drive-style Auto Iris lenses to ensure quality video even in fluctuating light conditions. Regardless of lens type, attaching a lens to the camera is simple with a built-in C/CS mounting ring and four-pin Auto Iris connector standard. A 2-pin appliance coupler and matching cord set provide reliable power connection, saving installation and maintenance time.

The HCC485LX includes an automatic electronic shutter for changes in light level, and an automatic backlight compensation option for viewing objects in the foreground with bright light in the background. A manual exposure mode can be used for applications, such as machine vision, that require a constant shutter speed at all times. The HCC485LX produces 480 TV lines of resolution to provide reliable video quality even in low-light conditions down to 0.40 lux.

#### Market Opportunities

The Honeywell HCC485LX is designed for general cost-effective, high-resolution surveillance applications where a colour image and object identification and recognition are required. This includes general indoor surveillance applications in retail, educational, financial, and other commercial markets. Combined with the AVH environmental housing, the HCC485LX can be used as a solution for outdoor applications, such as car parks, building entranceways, and driveways.

#### Features

- 1/3" colour CCD with DSP
- 480 TV lines of resolution
- Low-light performance 0.40 lux (F1.2)
- Automatic Electronic Shutter (AES)
- Manual Exposure Mode for setting shutter speed
- Automatic Backlight Compensation (BLC)
- 230 with line lock
- C/CS lens mount
- DC, Video and Manual Iris lens support




# HCC485LX

## SPECIFICATIONS

Operational	
Video Standard	PAL
Scanning System	625/50 lines
Image Sensor	1/3" Interline Transfer CCD
Number of Pixels (H x V)	752 x 582
Minimum Illumination	0.40 lux @ F1.2
Horizontal Resolution	480 TVL
Video Output	1.0 Vp-p @ 75 Ohms
Sync System	230 VAC: Line lock
S/N Ratio	>50
Auto Gain Control	On/off
ALC	Variable Iris control for DC drive lenses
Automatic Electronic Shutter	1/50 – 1/100,000 sec
Manual Electronic Shutter	1/50 – 1/100,000 sec
Lens Iris Control	DC drive/Video drive
White Balance	ATW/AWB/Manual/Fixed
Line Lock Phase Adjust	Adjustable AC Line lock
BLC	On/off
Electrical	
Voltage Input	230 VAC
Input Range	207 - 253 VAC
Surge Suppression	1.5 kW transient
Power Consumption	4.2 W
Mechanical	
Dimensions (W x H x D)	68 mm x 56 mm x 140 mm
Weight	0.41 kg camera only
Construction	Housing: Aluminium Finish: Cool grey powder coat
Camera Mount	1/4 - 20 UNC mounting shoe
Lens Mount	C/CS adjustable mounting ring
Connector	Video Output: BNC connector Lens: 4-pin connector Power Input: 2-pin appliance coupler
Power Indicator	Green LED indicates Power On

Environmental	
Temperature	Operating: -10°C to 50°C Storage: -20°C to 70°C
Relative Humidity	20% to 80%, non-condensing
Regulatory	
Emissions	CE (EN55013)
Immunity	CE (EN50130-4)
Safety	EV: 73/23/EEC LVD
Accessories:	
Recommended Lens Options	
HLD28V8F95L	2.8 - 8 mm, F0.95, DC Auto Iris lens
HLD27V13DNL	2.7 - 13.5 mm, F1.3, DC Auto Iris lens
HLD5V50F13L	5.0 - 50 mm, F1.3, DC Auto Iris lens
Housing and Mounts	
AVH530SH5	Housing - 110-240VAC, Aluminium, sunshield
AVH500WMB	Wall bracket - standard
AVH500CMB	Wall bracket - cable management

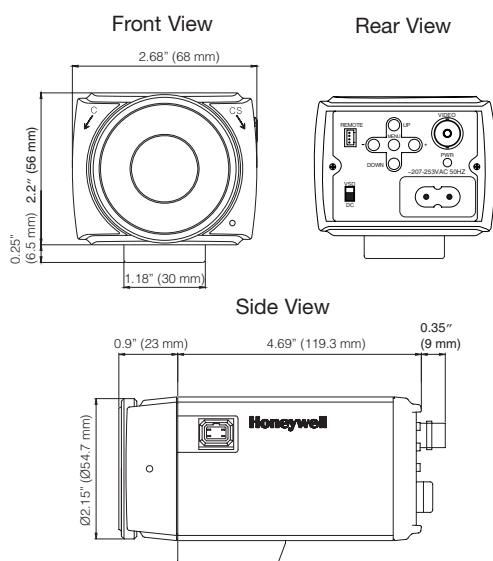

Ordering	
HCC485LX	1/3" CCD, High-Resolution Colour Camera with DSP, 480 TVL, 230 VAC, PAL

**NOTE:** Honeywell reserves the right, without notification, to make changes in product design or specifications.

### Honeywell Security

Honeywell Video Systems  
Aston Fields Road  
Whitehouse Industrial Estate  
Runcorn  
Cheshire WA7 3DL  
Tel: 08448 000 235  
Fax: +44 (0) 1928 701063  
Email: sales.video.uk@honeywell.com  
www.honeywell.com/security/uk

HVS-HCC485LX-01-EN(0807)DS-COE  
August 2007  
© 2007 Honeywell International Inc.

# Honeywell