


Vindicator® Area Commander

Intuitive Command and Control for Local Area Arm/Disarm

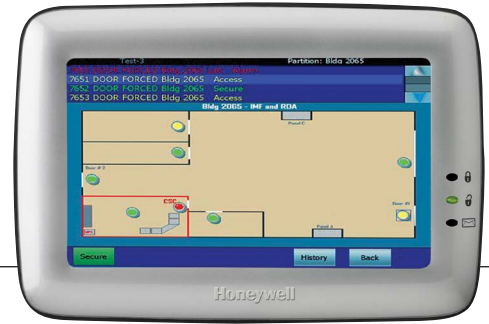

Honeywell's Vindicator Area Commander (VAC) provides comprehensive "Assessment at a Glance" protection for local area arm/disarm and monitoring solutions for Vindicator system partitions. VAC is composed of a graphical operator interface managed by a Vindicator V5 Intrusion Detection System (IDS) or a Vindicator Premise Controller (VPC). An authorized operator may secure or access partitions, acknowledge and secure partition alarms, and view partition event history. Partition events may be monitored or controlled outside the partition by security personnel using Vindicator Command and Control (VCC/VCC2) with a V5 IDS system controller.

VAC presents an operator with graphical maps of partitions for clear orientation and quick assessment. Logging in, partition selection, viewing and commanding are all accomplished via simple, intuitive touch screen controls. In an alarm situation, VAC issues audible alerts and focuses the operator on the highest priority event.

VAC can be directly wall mounted or installed in a locked, tamper alarmed and tamper resistant enclosure. The enclosure is suitable for flush or surface mount installation.

FEATURES

- FIPS 197 certified AES encrypted communications
- USAF ATO Certification Ready
- Intuitive Map-based Touch Screen Operation
- LED Indicators show VAC Current State
- Easy Arm/Disarm control to secure and access areas
- Partition system for local control by authorized operators
- Alarm annunciation, disposition, and securing
- Unique user PIN's
- Focuses operator attention on highest priority events
- Multiple partition control on a single operator interface
- Multiple operator interfaces control of a single partition
- Audible alerts configured per site policy
- Event assessment tags
- Event history display

Vindicator® Area Commander

Intuitive Command and Control for Local Area Arm/Disarm


SPECIFICATIONS

- Microsoft® Windows® CE
- 7" color wide screen display
- 800 x 480 resolution TFT Display with 16 million colors
- 10/100 Ethernet LAN
- Power: 12VDC, 1.7 W Sleep, 2.7 W in operation
- Operating Temperature: 32 degrees F – 120 degrees F (0 – 49C)
- Dimensions: 8.3" W x 5.6" H x 1.2" D (210mm x 142mm x 29mm)
- Weight: 17 oz
- Optional Mounting Enclosure: 13 1/8" W x 8 1/4" H x 3 3/4" D overall; (333mm x 210mm x 95mm) hinged, locking cover, tamper
- Arming exit delays by operator and partition configurable from 0 to 65,000 seconds
- User selectable automatic operator log out due to non-activity
- Configurable audible and silencing
- 100% touch screen operation
- Map size 800x300 pixels fixed.
- Point states graphically displayed on maps and in text lists
- Familiar Vindicator configuration screens

Application

- Create up to 4 partitions
- Include up to 80 points per partition
- Authorize up to 32 operators per partition (for a total of 128 operators)
- V5 IDS manages up to 16 Vindicator Area Commanders
- Vindicator Premise Controller manages up to 8 Vindicator Area Commanders

System Configuration Diagram

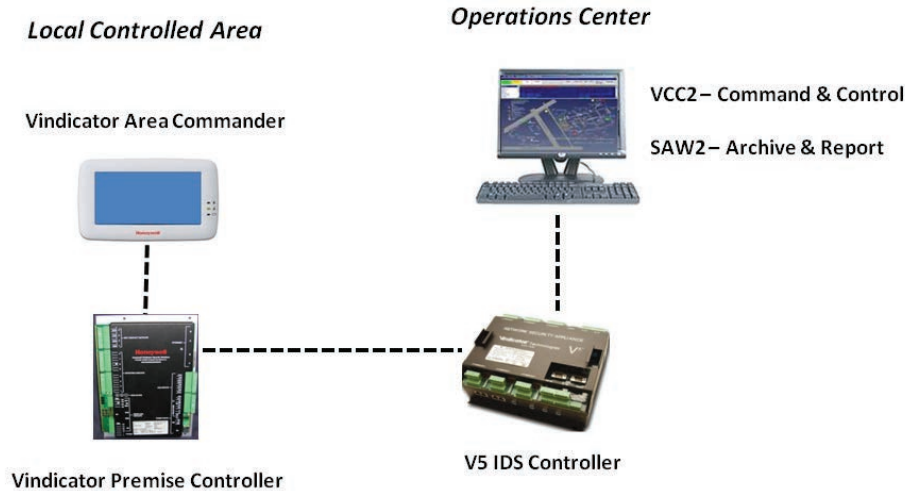

ORDERING INFORMATION

Vindicator Area Commander

548-52100-01	AE Vindicator Area Commander (VAC)
548-62100-01	SE Vindicator Area Commander (VAC)
548-52200-01	AE Vindicator Premise Controller (VPC)
548-62200-01	SE Vindicator Premise Controller (VPC)
908-36085-01	Vindicator Area Commander User Guide (Included with VAC)
908-36084-01	Vindicator Area Commander Installation Guide (Included with VAC)
908-36088-01	VAC/VPC Install and Programming Guide

Automation and Control Solutions

Honeywell Vindicator® Technologies
3019 Alvin Devane Blvd, Bldg. 4, Suite 430
Austin, TX 78741
1.512.301.8400 (sales)
1.800.367.1662 (technical support)
www.honeywell.com

LVINACD/D
May 2014
© 2014 Honeywell International Inc.

Honeywell