

11000 RANGE



IndigoVision
Complete IP Video Security Solutions



Enhanced HD Fixed Camera

Enhanced High Definition security video

Part of IndigoVision's 11000 Range, the Enhanced High Definition (HD) Fixed Camera delivers more image detail, better image clarity and impressive low light sensitivity. With highly optimised H.264 compression and ACF+ technology, storage costs are reduced by up to 95%.

Key Features

SENSOR



COMPRESSION



INTELLIGENCE




OTHER




Product Codes

Enhanced HD Fixed Camera (PAL)	Camera plus Enhanced Management Software
Standard Lens - Day/Night with Audio	561291
Telephoto Lens - Day/Night with Audio	561295

For more information:



Dimensions

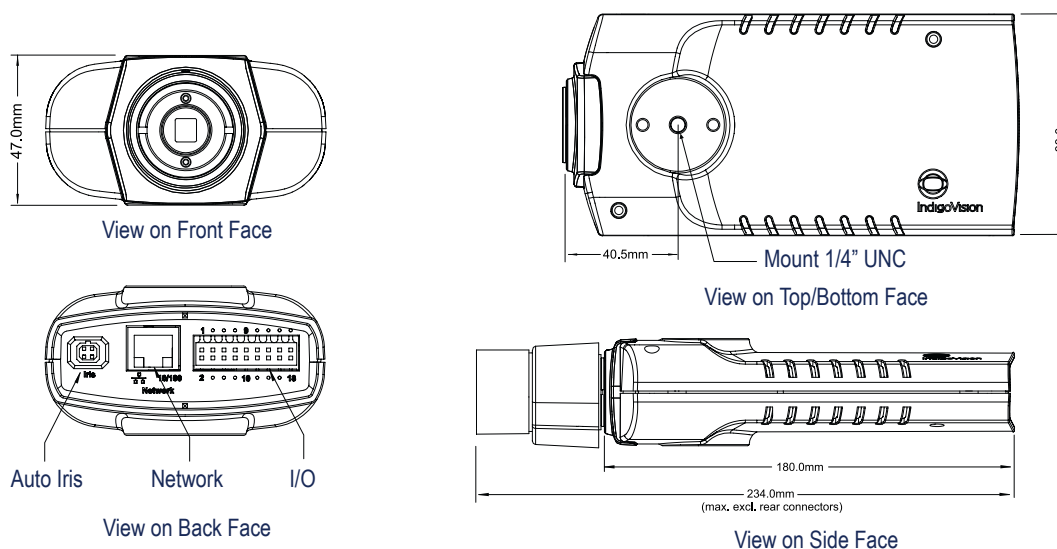

Specification

Camera Features	
Sensor	1/2.7" Progressive CMOS
Active Pixels (HxV)	1MP (1280 x 720)
Horizontal Resolution	> 600 TVL
Minimum Sensitivity	Day: 0.7 lux (colour). Night: 0.035 lux (mono). 50 IRE, F1.2, 1/30s shutter
Dynamic Range	WDR 115dB Max
Gain Control	Auto setting across a 33dB range
Back Light Compensation	On/Off
White Balance Mode	Auto
Day/Night	True Day/Night with Mechanical IR Cut Filter
Video Resolution	720p: 1280x720 pixels; SD: 640x360 pixels; 16:9 ratio
Signal/Noise Level	> 39dB
Lens Options	Standard: 3.1mm - 8mm, Horizontal view angle 97.8° (W) 39.4° (T), F1.2, P-iris, Vari-focal, CS mount Telephoto: 12.5mm - 50mm, Horizontal view angle 24.4° (W) 6.3° (T), F1.4, P-iris, Vari-focal, CS mount
Iris Control	Auto-iris/Electronic Shutter/Manual
Shutter	Rolling; Auto from 1/2 to 1/100,000
Exposure Control	Auto/Manual/Slow AE
Video Compression	Full frame rate, full colour: H.264 (ISO 14496-10); 25fps guaranteed
Video Bit Rate	User-configurable from 32Kbps up to 8Mbps
Video Multi-Streaming	Up to 32Mbps total video output; Unlimited multicast connections. Up to seven 4Mbps unicast connections; Up to sixteen 1Mbps unicast connections
Video Multi-Encoder	Up to two simultaneous resolutions with guaranteed frame rate including: 720p (25fps), SD (25fps)
Video Analytics*	Standard: ACF, ACF+, Motion Detection, Hooded. Advanced: Dual Tripwire, Congestion, Counterflow, Museum
Audio Compression	AAC-LC (ISO 14496-3)
Audio Bit Rate	User-configurable bit rates from 32Kbps to 160Kbps per channel
Audio Protocol	RTP (RFC 3640)
Audio Dual Encoder	Encoder A: 1 Stream Configuration plus Encoder B: 1 Stream Configuration
Audio Resolution	Full Duplex 16 Bit, 16kHz sample rate Mono/Stereo Input, Mono Output
Audio Input	Stereo / Mono line in terminal block connector. Nominal voltage: 1V p-p, Mic 30mV p-p. Mic type: dynamic or electret
Audio Output	Mono line out terminal block connector. 1V p-p, Minimum load impedance: 16 Ohms
Binary Input/Output	2 Pull up inputs for non powered contacts; 1 solid state opto-isolated relay output @500mA, LED output @20mA
Data Input/Output	1 Data/Console port: RS232 up to 115.2 Kbps
Network Interface	IEEE802.3 and IETF standards: 10/100 Base-T Ethernet, TCP, UDP, RDP, ICMP, IGMP, SNMP, HTTP, HTTPS
Network Security	HTTPS / Embedded Linux Firewall. Salted passwords, with MD5 encryption
Time	Embedded real-time clock, NTP client with battery backup
Dimension/Weight	178mm (d) x 88mm (w) x 47mm (h) and 0.5Kg
Regulatory	EN 55022 (2010) ITE emission standard – Class A; EN 55024 (1998) +A1:2000 +A2:2003 ITE immunity standard; CFR47(2008) Part 15 subpart B -Class A (US federal code of regulations); EN 60068-2-1 & 2 (1993) Low & High temp; EN 60068-2-6 & 64 Sinusoid & Random vibration (2008); EN 60068-2-29 Bump (1993); EN 60068-2-30 Humidity up to 95% Non Condensing (2005)
Housing	Diecast aluminium alloy
Electrical	PoE (802.3af Class 0) or 24V DC @ 0.29A / 6W max
Operating Temperature	0°C to 50°C
IndigoVision Software Requirements	SMS4™ r1/Control Center v11.0 or later
ONVIF**	Profile S

* Advanced Video Analytics require a licence.

** Firmware upgrade is required for ONVIF Conformance.