



CMD 6182X / 6186X


Camera Series
Dome Camera

D/N Vandal Resistant ATR 700TVL Vari-Focal Dome Camera




Features

- Resolution of 700TV Lines
- Adaptive Tone Reproduction(ATR)
- Noise Reduction(2D-NR)
- High Light Compensation(HLC)
- Color Rolling Suppression(ANTI CR)
- Day & Night (IR Cut Removable)
- White Balance
- On Screen Display(OSD)
- Privacy Zone

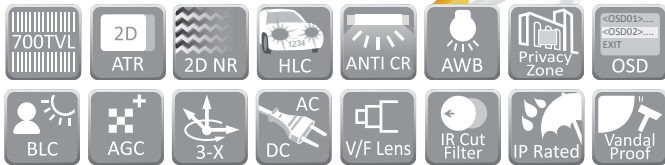

Dimensiones $\phi 145(D) \times 130mm(H)$

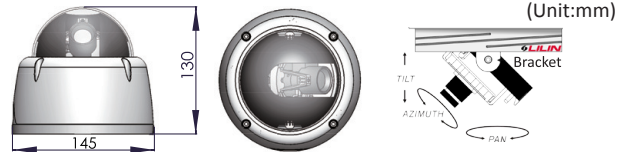

Weatherproof & Vandal Proof Dome Camera

| Name | | D/N Vandal Resistant ATR 700TVL Vari-Focal Dome Camera | | |
|----------------------------|---------------|---|--|--|
| Series Number | | CMD6182X / 6186X | | |
| Model | | CMD6182X3.6N/P | CMD6186X3.6N/P | |
| Lens | Focal Length | 3.3 – 12mm | | |
| | Iris | F1.4 | | |
| | Angle of View | H | 89.8° – 23.9° | |
| | | V | 63.6° – 17.9° | |
| | D | 125.7° – 29.9° | | |
| Power Input Voltage | | DC12V $\pm 10\%$ | DC12V ($\pm 10\%$) AC24V ($\pm 10\%$) | |
| System | | NTSC or PAL | | |
| Pick Up Element | | 1/3" Exview HAD CCD Sensor | | |
| Effective Pixels | NTSC | 976(H) x 494(V) [NTSC] | | |
| | PAL | 976(H) x 582(V) [PAL] | | |
| Chip Size | | 5.58mm(H) x 4.67mm(V) | | |
| H/V Sync. | NTSC | 15.734 KHz / 59.94Hz [NTSC] | | |
| Frequency | PAL | 15.625 KHz / 50Hz [PAL] | | |
| Scanning System | | 2:1 Interlace | | |
| Menu Control | | OSD Control | | |
| Sync. Mode | | Internal | | |
| Infrared Cut Filter | | Auto Selectable, Automatic Switch From Color Mode to Monochrome | | |
| Resolution | | Color: 700TV Lines, Mono: 750TV Lines | | |
| Minimum Illumination | Color | 0.045Lux / F1.4 | | |
| | Mono | 0.009Lux / F1.4 | | |
| S/N Ratio | | More Than 50dB (AGC-OFF) | | |
| Auto Gain Control | | AUTO / MANUAL | | |
| White Balance | | ATW / PUSH / USER1 / USER2 / ANTI CR / MANUAL / PUSH LOCK | | |
| Shutter | Auto | 1/60(1/50)S – 1/100,000S | | |
| | Manual | 1/60(1/50)S, 1/100(1/120)S, 1/250S, 1/500S, 1/1,000S, 1/2,000S, 1/4,000S, 1/10,000S | | |
| Adaptive Tone Reproduction | Luminance | LOW / MID / HIGH | | |
| | Contrast | LOW / MIDLOW / MID / MIDHIGH / HIGH | | |
| Back Light Compensation | | BLC / HLC(High Light Compensation) / OFF | | |
| Noise Reduction | | Y / C / Y/C / OFF | | |
| Picture Adjust | | MIRROR / BRIGHTNESS / CONTRAST / SHARPNESS / HUE / GAIN | | |
| Privacy Masking | | ON / OFF | | |
| Privacy Masking Zone | | 8 Zones | | |
| OSD Language | | ENGLISH/JAPANESE/GERMANS/FRENCH/RUSSIAN/PORTUGUESE/SPANISH/SIMPLY CHINESE | | |
| Video Output | | CVBS 1.0Vp-p, 75ohm | | |
| Gamma Characteristic | | $\gamma=0.45$ | | |
| Power Consumption | | 2.3W | 3.5W (DC12V) 3.0W (AC24V) | |
| Operating Temperature | | -35°C – +50°C (-31°F – 122°F) | | |
| IP Rating | | IP67 | | |
| Vandal Proof | | Withstand a blow from a 10 lbs sledgehammer | | |
| Dimension | | $\phi 145(D) \times 130mm(H)$ | | |
| Weight | | 970g | 990g | |