



Creativity Progress & Excellence

Network Product





IPS8364 / IPS8368

IMEGAPRO


**36X Day & Night WDR 650TVL
Speed Dome IP Camera (Outdoor)**



Features

- 36X Optical Zoom Lens(3.3 – 119mm)
- 256X Digital Zoom
- 650 Horizontal TV Lines
- True H.264 AVC/MPEG-4 part 10 real-time video compression
- H.264 and Motion JPEG multi-profile video streaming
- Wide Dynamic Range
- 2D+3D Digital Noise Reduction
- High Light Compensation
- Digital Image Stabilizer
- Dynamic Privacy Zone Masking
- Up to 128 Programmable Preset Positions
- 2-way audio supported
- ONVIF supported
- Weatherproof IP 66

Dimensions Φ 210 mm x 332 mm

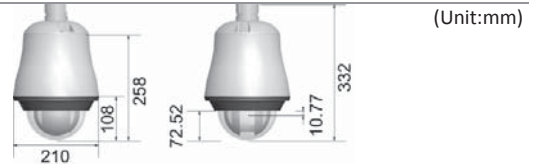

SPEED DOME IP CAMERA SERIES					
36X Day & Night WDR 650TVL Speed Dome IP Camera					
General	Model	IPS8364N	IPS8368N	IPS8364P	IPS8368P
		System	NTSC		PAL
	Power Supply	AC24V	AC100 – 240V	AC24V	AC100 – 240V
	Power Consumption	25W (with Heater)	63W (with Heater)	25W (with Heater)	63W (with Heater)
	Image Pick-up Device	Sony 1/4" 960H			
	Effective Pixels	976(H) x 494(V)		976(H) x 582(V)	
	Total number of pixel	1028(H) x 508(V)		1028(H) x 596(V)	
	Scanning System	2:1 Interlace			
	Scanning Frequency	15.734KHz(H) / 60Hz(V)		15.625KHz(H) / 50Hz(V)	
	Synchronization	Internal / Line Lock Selectable			
	Video Output	CVBS 1.0 Vp-p / 75 Ω BNC			
	Horizontal Resolution	Color : 650 TV Lines , Mono : 700 TV Lines			
	Signal to Noise Ratio	More Than 50 dB (AGC : Off)			
	Minimum Illumination	Color : 0.1 Lux at F1.4 , Mono : 0.05 Lux at F1.4			
	IP Rating	IP66			
	Ambient Operating Temperature	-40°C – +50°C (-40°F – 122°F)			
	Operating Humidity	0% – 90%			
	Dimension	Φ 210 mm x 332 mm			
	Weight	3200 g			
	Heater Activation	On: 15°C, Off: 25°C			
	Fan Activation	On: 35°C, Off: 25°C			
Pan & Tilt	Panning Range	360° Endless			
	Panning Mode	Manual , Auto , Manual Position , Sequential Position			
	Panning Speed	Manual Approx. 0.15°/s – 120°/s 8 Steps, Preset Approx. 1°/s – 255°/s, Alarm Trigger Speed 360°/s			
	Tilting Range	-6° – +96°			
LENS	Tilting Mode	Manual , Auto , Manual Position , Sequential Position			
	Tilting Speed	Manual Approx. 0.15°/s – 120°/s 8 Steps, Preset Approx. 1°/s – 255°/s, Alarm Trigger Speed 360°/s			
	Zoom Ratio	36X Optical Zoom			
	Focal Length	3.3 mm – 119 mm			
Main Functions	Minimum Aperture Ratio	1 : 1.4 (Wide) – 4.2 (Tele)			
	Minimum Object Distance	1.5 m (Tele)			
	Iris Range	F1.4 – 360 , Close			
	Angle Field of View	Wide : 72.51° (D) 60.15° (H) 46.3° (V) Tele : 2.13° (D) 1.47° (H) 1.20° (V)			
Main Functions	Control Interface	RS-485 Transmission			
	Protocol	LILIN (MLP1,MLP2) / PELCO-D / PELCO-P / Panasonic / Kalatel			
	Control Function	Pan and Tilt / Zoom and Focus / Iris and ICR / 128 Preset Position / Home Position / Patrol			
	Character Display	On / Off (Preset ID : 16 Alphanumeric Characters , Zoom Ratio , Alarm Message , Date / Time , Pan / Tilt Angle)			
	Password Lock	Function Setup			
	Digital Zoom Ratio	256X			
	Zoom Speed	0 – 7 selectable [7 : Approx. 7.0 Second (Tele to Wide) in Manual Mode]			
	Focus Speed	Slow / MID. / Fast Selectable [Fast : Approx. 7.0 Second (Far to Near) in Manual Mode]			
	Auto Focus	Auto / One Push			
	Iris	ALC (Adjustable Output Target Level) / Manual			
	Day & Night	Day / Night / Auto / Schedule			
	Electronic Image Stabilizer	Off / On			
	Electronic Shutter Speed	1/60 to 1/100,000		1/50 to 1/100,000	
	Slow Shutter Speed	Up to 15 field			

SPEED DOME IP CAMERA SERIES		
Main Functions	Exposure Mode	Auto / Manual
	Wide Dynamic Range	Off / On (60 dB)
	ATR (Adaptive tone reproduction)	Off / On (Low / Middle / High)
	BLC (Back Light Compensation)	Off / On
	HLC (High Light Compensation)	Off / Auto
	Sharpness	Adjustable
	White Balance	ATW / AWC / Manual (1800K – 10500K)
	Auto Gain Control	OFF / Low / Middle / High
	2D+3D Digital Noise Reduction	OFF / Low / Middle / High
	Auto Mode	OFF / AUTO / SEQ / TOUR / PATROL (STOP / PLAY / LEARN)
	Privacy Zone	Off / On Selectable (Up to 8 Zones Settings)
	Digital Effect	OFF / V-Flip / Mirror / Rotate
	Alarm Input / Output	3 Input [Alarm In 1 – 3 (NC / NO) (TTL 5Vdc) , 1 Output (Alarm Out NC / NO) (0.5A 120Vac, 1A 24Vac)
	2-way audio supported	G.711
Schedule Setting	Alarm Input / Auto Mode / Daylight Saving Time	

NETWORK	
Video compression	H.264 , Motion JPEG
Resolution	960H : 960 x 480 (NTSC) / 960 x 576 (PAL) , D1 : 720 x 480 , CIF : 352 x 240
Frame rate	H.264 : up to 30/25 FPS at 960H resolution Motion JPEG : up to 30/25 FPS at D1 resolution
Video streaming	RTP/HTTP, RTP/TCP, RTP/UDP/Multicast
Video bitrate	128 Kbps to 5 Mbps
	Frame rate and bitrate controllable on-the-fly
Security	VBR / CBR / GOP supported
	Base64 HTTP encryption
Users	Multiple user access levels with password protection 10 user accounts available
Alarm Function	8 simultaneous users
CPU, memory	Image upload over FTP and E-mail by alarm / motion detection
Web PTZ control	Embedded SoC ARM11, 528MHz, 256MB DDR2, 256MB flash memory
PTZ preset scheduling	Pan , tilt , zoom in / out , absolute position, and video-click-n-move
Maintenance	Yes, via web interface
Network Interface	Firmware update via HTTP
	Firmware available at website
Client PC requirement	10Mbps / 100Mbps, RJ-45
	OS : Windows 2000, Windows XP, Windows Vista, Windows 7, Windows 8
Network protocols	Browser : Windows Internet Explorer 6.0 or above
	CPU : Intel Pentium 4 1.8GHz or above
Mobile phone	RAM : 1GB or above, Independent Display Card
System integration	IP, TCP, UDP, HTTP, SMTP, NTP, DDNS, UPnP, FTP, ARP, DHCP, PPPoE, DNS, RTSP, RTCP, Telnet, ICMF, IGMP, ONVIF, SNMP
Video display	iPhone, iPad, and Android support
OS	System integration ONVIF & LILIN HTTTPAPI
	CMX HD 3.6 support
	LILIN Universal ActiveX & LILIN Java Applet
	Embedded Linux 2.6.32