


NUUO NDVR Specification

NUUO Hybrid System/ 2009.6.25

SCB-7000 Series

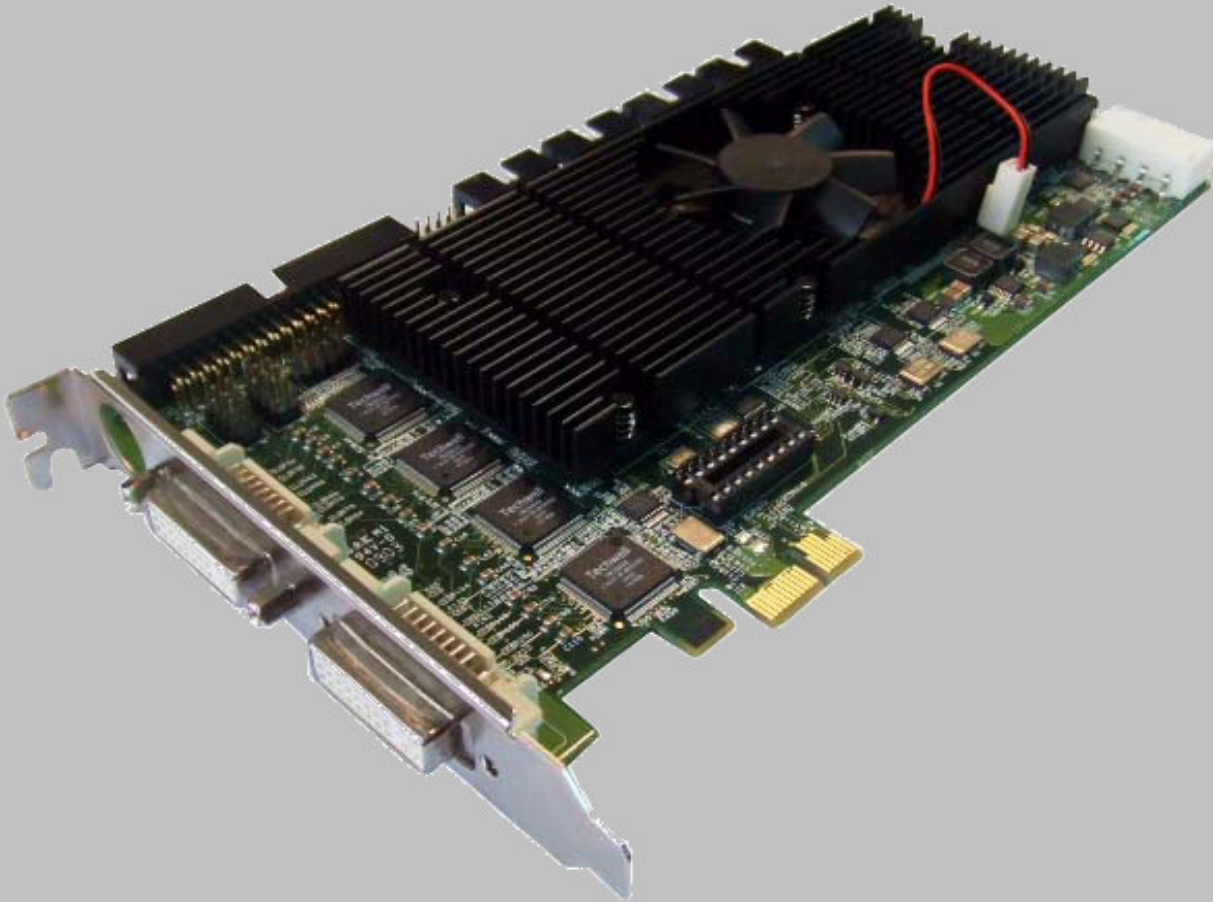

Specifications

Model	SCB-7004	SCB-7008	SCB-7016
Video Input	4 Cameras	8 Cameras	16 Cameras
Audio Input	4 Channels	8 Channels	16 Channels
Maximum Cards	4 Cards	4 Cards	2 Cards
Display Rate	120 fps (NTSC), 100 fps (PAL)	240 fps (NTSC), 200 fps (PAL)	480 fps (NTSC), 400 fps (PAL)
Recording Rate @D1	120 fps (NTSC), 100 fps (PAL)	240 fps (NTSC), 200 fps (PAL)	480 fps (NTSC), 400 fps (PAL)
Video Resolution	NTSC: 176x120; 352x240; 704x480 PAL: 176x144; 352x288; 704x576		
Compression Format	Hardware Compression H.264		
Interface	PCI-e x1		
Available I/O Card	1 Card	2 Cards	4 Cards
Available I/O Box	Support		
Hardware Watchdog	Support		
Dimension	167 (W) x 121 (H) mm	167 (W) x 121 (H) mm	216 (W) x 126 (H) mm
Software Version	NUUO Full D1 H.264 Hybrid System v3.1.24		
System Minimum Requirements (per card)			
OS Supported	Windows XP SP3/ Windows 2003/ Windows Vista SP1		
CPU	Core 2 Duo E5200	Core 2 Quad Q9550	Core 2 Quad Q9550*
RAM	1 GB	1 GB	2 GB
HDD	80 GB		
Mother-board	Intel P35, P43, P45 chip, ASUS motherboard recommended		
Display	nVidia 8500GT/9400G, ATI Radeon HD2400/X1600/4350 chipset graphic card		