ET1100CPp Series

Industrial 10/100Base-TX (PoE+) Ethernet Over Coax Extenders with PoC





Features

- ▶ PoE+ (30W) and Power over Coaxial
- ▶ 802.3af/802.3at Compliant
- ► Data Rate up to: 90Mbps (Downlink), 90Mbps (Uplink)
- ► Max. Distance: 1 Km over Coax (RG-59/U) (for single channel extender only)
- Compatible with 4-port standalone Receiver & 8/16-port Rack Mount Receiver
- ► Accept 48~57VDC external power input or PoE power input from RJ45 port
















Warranty

5-Year Warranty

Typical Application

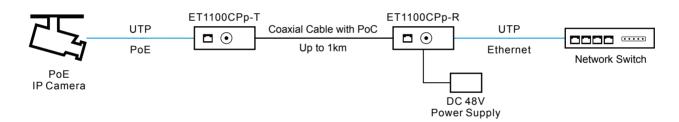

Specifications

Ethernet	
Standards	IEEE802.3 10Base-T
	IEEE802.3u 100Base-TX
	IEEE802.3af Power over Ethernet
	IEEE802.3at Power over Ethernet
Cabling	Cat5 or above
Maximum Distance	100m
Connector	1 x RJ45
Coaxial	
Cabling	Coaxial Cable (75 ohm)
Connector	1 BNC (female)
Distance	Up to 1 Km on RG-59/U (for single channel extender only)
Data Rate	
Downlink	90Mbps (Max.)
Uplink	90Mbps (Max.)
Technology	Power Line Communication (PLC)
Electrical and Mechanical	
Input Power	48-57VDC (Terminal Block) or IEEE 802.3at PD (for ET1100CPp-R only)
Power Consumption	8W Max. (PoC not in use)
	60W Max. (Poc in use)



Specifications

Protection	
Reverse Polarity	Present
LED Indicators	
Power	Power Status
Ethernet	SPD, LINK/ACT, PoE(Transmitter)
Coax Data	LINK(Transmitter) / Ready(Reveiver) / PoC(Receiver), Activity
PoE	
Standard	IEEE802.3af/at
Mode	В
Port	RJ45
Max. Power Per Port	25.5W max.at RX(Powered Device)
	30W Max.at TX(Power Souring Equipment)
Dimensions (W x D x H)	114 × 82 × 31 mm
Weight	0.25 Kg
Casing	Aluminum case
Mounting	Wall Mount
Environmental	
Operation Temperature	-10°C to 60°C (14°F to 140°F)
Storage Temperature	-40°C to 85°C (-40°F to 185°F)
Relative Humidity	5% to 90% non-condensing
MTBF	> 100,000 hrs

Regulatory Approvals

ISO9001

FCC Part 15 Class A EN55022 Class A Surge Protection

RJ45: 1KV BNC: 2KV Power: 500V

Ordering Information

Available Model	Description	
ET1100CPp-T ET1100CPp-R	Transmitter of 10/100Base-TX (PoE+) Ethernet Over Coaxial with PoC Receiver of 10/100Base-TX (PoE+) Ethernet Over Coaxial with PoC	
Optional Accessories (to be purchased separately)		
Power Supply	Please refer to the power supply information at the back of the catalogue, our website www.ot-systems.com, or consult OTS sales at sales@ot-systems.com for your power system design properly.	

Package Checklist

- Transmitter / Receiver of Ethernet Over Coaxial Extender with PoC x 1
- Hardware installation guide(printed) or QIG x 1

