



VRD130CMHVL Range Vandal-resistant External Dome Camera Sony® 1/3" PAL CCD

- 1/3" Sony® Super HAD CCD
- 540 TVL High Resolution
- 4~9mm Varifocal Lens, adjusted from outside the camera
- IP66 weather-resistant cast aluminium housing
- 24 x 850nm Infra-red LEDs for 10M night time illumination
- 12vDC Operation
- 130/360 mA LEDs off/on

## APPLICATIONS

Ideal for installation in any exterior location.


Advanced vandal-resistant properties.

Full 3-axis "eyeball" adjustment

© 01279 419913 www.pecancctv.com

## VRD130CMHVL Range Dimensions (mm)



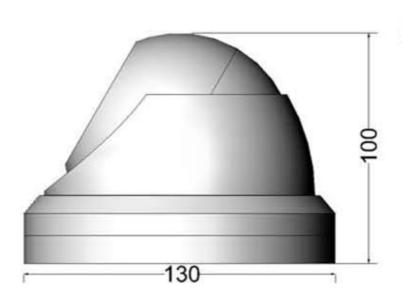



VRD130DB



## **Technical data**

Composite video 75 Ohms
Electronic 1/50-1/120,000 sec
4-9mm Varifocal lens
-10 to +50°C
90% maximum non-condensing
12v DC
On
930g

For critical viewing applications additional illumination may be required.

Mode	Colour/Mono
Sensor	1/3" PAL
Resolution	540 TVL
Sensitivity	0.3 Lux/ F1.2 0.0 Lux/LEDs ON
Power	130/360 mA LEDs ON

## Power connection

The VRD130CMHVL is supplied with a flying lead, 12v DC inline jack and BNC composite video.

Order information	Code
Vandal-resistant colour/mono camera in Gunmetal Grey	VRD130CMHVL
Vandal-resistant colour/mono camera in Cool Grey	VRD130CMHVL-CG
Vandal-resistant colour/mono camera in White	VRD130CMHVL-W
Wall mounting bracket	VRD130WBKT
Deep Base for above-surface cable connection	VRD130DB
We recommend the use of a minimum 1amp power supply with this produc	t PSU1210R

Whilst every effort has been made to ensure the accuracy of the information provided, no liability can be accepted for any errors or omissions. All dimensions are approximate, Stortech Electronics Ltd reserves the right to alter the specification and introduce changes witjout prior notice.

**PECAN CCTV** 

Tel: 01279 419913

Email: sales@pecancctv.co.uk

Fax: 01279 419925 www.pecancctv.co.uk