



# VRD90CML Vandal Dome with IRLEDs Colour/Mono 420TVL

- 1/3" Sony Super HAD Colour CCD
- Tough cast Aluminium Housing
- Capture range 5-10m in ideal conditions
- IP66 weather-proof exterior housing
- Full vertical (90°) and horizontal (360°) movement
- Cable fully managed inside bracket to allow camera orientation without damage
- Electronic Iris circuit
- Fixed type 3.6mm lens

#### **APPLICATIONS**


Suitable for a wide variety of applications.

The versatile VRD90CML camera is ideal for installation in vulnerable positions where local environmental lighting is limited

TO 01279 419913 www.pecancctv.com





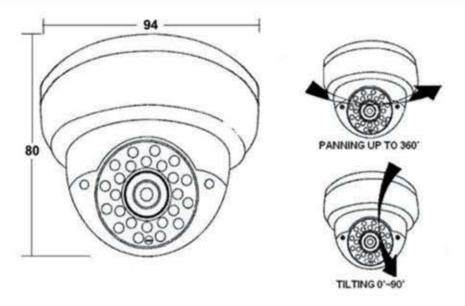

#### **Technical data**

Video output	Composite video 75 ohms
Exposure control	Electronic
Lens	f3.6mm fixed type
Voltage	12vDC
IR illumination	24pcs infrared LED (ø5mm 850nm)
Operating temperature	-20°C ~ +50°C
Mode	PAL Sony® Super HAD CCD
Resolution	420TVL
Sensitivity	0.0Lux (LEDs on)
Power consumption	200/400mA LEDs Off/On
Weight	410g
Service Control of the Control of th	(AGAMATA TAR

#### Power connection

Power to the camera and integral lighting is supplied via the inline DC jack

#### Video

The video signal lead is fitted with a female BNC for easy connection to a coaxial, or other, video cable. Centre pin is signal, sleeve is ground.

### Order information

Weather-resistant 420TVL Vandal Dome camera	VRD90CML
Weather-resistant 420TVL Vandal Dome in white housing	VRD90CML-W
We recommend the use of a 1000mA PSU with this item	PSU1210R

Whilst every effort has ben made to ensure the accuracy of the information provided, no liability can be accepted for any errors or omissions. All dimensions are approximate. Stortech Electronics Ltd reserves the right to alter the specification and introduce changes without prior notice.

## **PECAN CCTV**

tel: 01279 419913

email: sales@pecancctv.com

fax: 01279 419925 www.pecancctv.com