



PRODUCT SPECIFICATION

PMC10A Monitor

10-INCH COLOR, HIGH RESOLUTION

CE



Product Features

- High Resolution
- Front Panel Controls
- Auto-Switching 100-240 VAC Input
- Auto-Sensing NTSC/PAL
- Built-in Speaker
- Video and Audio Input and Output
- S-VHS Input for Separate Y-C Signals
- Rack Mountable




The **PMC10A** high-resolution (350 TV lines) color monitor produces an excellent, quality picture. Great for security installations with minimal space, the compact 10-inch monitor is designed to fit on a small desktop or in a tight rack mount.

The **PMC10A** has an auto-switching, auto-sensing input signal of 100-240 VAC, NTSC/PAL. The internal switching/sensing system automatically detects input voltage and frequency upon power up. Manual selection is not required.

The back panel of the **PMC10A** features one BNC video input with looping output, one audio input and output and S-Video compatibility. All image adjustment controls (brightness, color, and contrast) are conveniently located on the front panel of the monitor.

The **PMC10A** is ideal for use with time-lapse and event-alarm VCR systems or color video multiplexers.

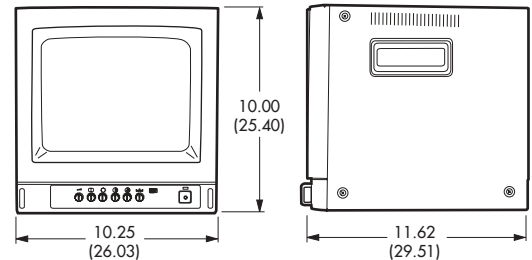

NOTE: VALUES IN PARENTHESES ARE CENTIMETERS; ALL OTHERS ARE IN INCHES.



International Standards Organization Registered Firm ISO 9001 Quality System



TECHNICAL SPECIFICATIONS

MODEL

PMC10A Color monitor, 10-inch (25.40 cm) picture display, NTSC or PAL

ELECTRICAL

Input Voltage 100-240 VAC auto-switching,
50/60 Hz auto-sensing
Power Consumption 49 watts
Horizontal Resolution 350 TV lines
Visual Picture Size 10-inch diagonal
Sweep Linearity 10%
Speaker Output 1.0 watt (-3 dBV)

GENERAL

Connectors
Video 1 input BNC, 75 ohms, or Hi-Z
1 looping through output
Audio 1 input RCA, Hi-Z
1 looping through output
S-Video 1 input DIN
1 looping through output
Construction Steel cabinet
Finish Black with black bezel around screen
Dimensions 10.25" W x 10" H x 11.625" D
(26.03 x 25.40 x 28.86 cm)
Weight 19 lb (8.6 kg)

ENVIRONMENTAL

Operating Temperature 32° to 106°F (0° to 41°C)
Humidity 0% to 90% (non-condensing)

CERTIFICATIONS

- ◆ CE, Class B
- ◆ ETL listed
- ◆ ETL listed for Canada
- ◆ FDA
- ◆ EMI compliance
- ◆ FCC, Class B

RECOMMENDED MOUNTS

RMQ10T Bolt on rack ears for PMC10A monitor. Adapts monitor to standard 19" W (48.26 cm) rack. (6 RUs)
RMA10T Rack kit for mounting one PMC10A monitor in a 19" W (48.26 cm) rack. (7 RUs)

Specifications subject to change without notice.
©Copyright 2001, Pelco. All rights reserved.