

Siqura Operator Storage™

Features

- Viewing client software for Siqura IP products and i-NVR series
- Simultaneous playback & live viewing
- 16 images in real-time (480 f/s)
- Feature-rich video management
- Intuitive user interface
- Extensive search functionality
- Dual-monitor support
- Videowall support
- Any OPTC/Siqura Video stream
- Supports MPEG-2/-4/MJPEG and H.264



Description

Siqura Operator Storage™ offers live viewing, playback, control, and management of the Siqura i-NVR series and video codec/servers, and IP-cameras

Simultaneous Playback and Live Viewing

Full integration of all essential control tools enables you to view, search, and retrieve stored images and monitor live images in one user interface; everything with a single mouse click. Multiple stored images can be displayed synchronously while, at the same time, live feeds of essential cameras are shown, making sure that the operator does not miss anything important.

16x Real-Time Video

Operator Storage™ displays real-time video with superior quality and resolution (D1). Due to efficient coding and rendering, Operator Storage™ is able to display up to 16 images in real-time in the highest resolution.

Feature-Rich Video Management

Operator Storage™ provides a wide range of features, including intuitive search options, map tools, camera tours, matrix presets

Dual-Monitor Support

Operator Storage™ supports dual-head graphical cards. The dual-screen mode separates the graphical interface from the video images, improving the overview.

Siqura Surveillance Solutions

The Siqura Operator Storage™ is part of Siqura, a complete collection of surveillance equipment and solutions. Siqura offers video codecs/servers, IP cameras, video management, network storage, Videowall Support, and configuration software.

Ordering information

Model	Description
Siqura Operator Storage™	i-NVR viewing client software

Siqura Operator Storage™

Technical Specifications

PC requirements*

CPU minimum	Intel Pentium 4, 2 GHz
CPU recommended	Intel Pentium Dual-Core 3 GHz or better
Memory	1024 MB RAM or more
Video card	DirectX 9c compatible*
Operating system	Windows XP/Vista
LAN port	10/100/1000Base-TX
HD free space	>50 Mb
	Recommended Dual monitor support

General specifications

Number of cameras	1 to unlimited
Compression support	MPEG-2, MPEG-4, MJPEG, H.264
Dual monitor support	Yes
Multiple language support	Yes

Live Views

Live views	Yes
Max. number of live views	16
Video Wall support	Yes
Predefined views	Yes
Tours	Yes
Presets	Yes
Multiple plans	Yes

Recording


i-NVR integration	Yes
Manual recording	Yes
Recording on event	Yes
Snapshot	Yes

PTZ support

Preset support	Yes
Preset on event	Yes
CCTV keyboard support	Yes

Siqura Videowall Decoder Quad View	Yes
Siqura Videowall Decoder Multi View	Yes
Siqura Hardware Decoder	Yes

* Contact Optelecom-NKF for the latest specs.

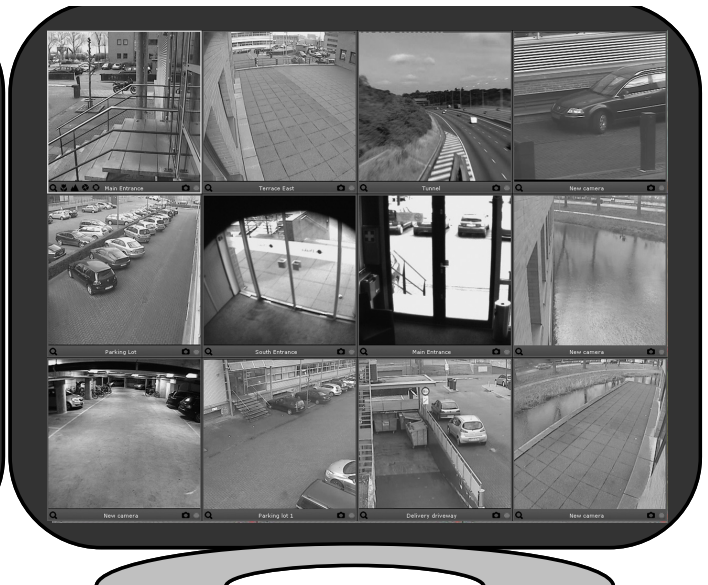

Operator Storage™ dual screen operation



The quality management system utilized in the development, production, sales and support of this product is ISO 9001:2008 certified by LRQA.